

ESD5Z Series

Transient Voltage Suppressors


for ESD Protection

Features

- Excellent clamping capability
- Low leakage
- Fast response time

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

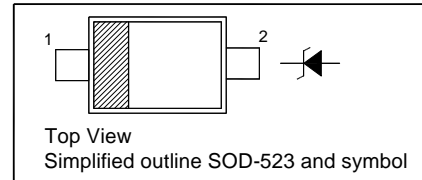

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
IEC61000-4-2 (ESD) Air Contact	V_{ESD}	± 30	KV
ESD Voltage Per Human Body Model Per Machine Model	V_{ESD}	16	KV
		400	V
Power Dissipation on FR-5 Board	P_{tot}	200	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$ ($V_F = 1.1\text{ V Max. at } I_F = 10\text{ mA}$)

Type	Marking Code	Reverse Stand-off Voltage	Reverse Current	Breakdown Voltage		Clamping Voltage			Reverse Peak Pulse Current	Peak Power Dissipation	Capacitance
		V_{RWM}	I_{R} at V_{RWM}	V_{BR}	at I_{T}	V_{C}	at I_{PP}	V_{C} at Max. I_{PP}	I_{PP}	P_{pk}	C_j
		Max. (V)	Max. (μA)	Min. (V)	(mA)	Typ. (V)	(A)	Max. (V)	Max. (A)	Max. (W)	Typ. (pF)
ESD5Z2V5	02	2.5	6	4	1	6.5	5	10.9	11	120	145
ESD5Z3V3	ZE	3.3	0.05	5	1	8.4	5	14.1	11.2	158	105
ESD5Z5V0	05	5	0.05	6.2	1	11.6	5	18.6	9.4	174	80
ESD5Z6V0	06	6	0.01	6.8	1	12.4	5	20.5	8.8	181	70
ESD5Z7V0	07	7	0.01	7.5	1	13.5	5	22.7	8.8	200	65
ESD5Z9V0	09	9	0.5	9	1	11.5	5	15	13.3	200	92
ESD5Z12	12	12	0.01	14.1	1	17	5	25	9.6	240	55



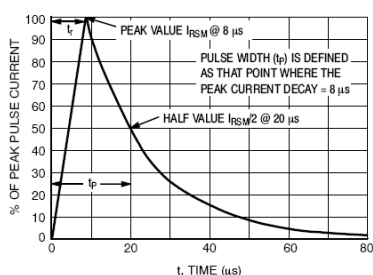


Figure 1. 8 x 20 μs Pulse Waveform



SEMTECH ELECTRONICS LTD.





ESD5Z Series

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-523

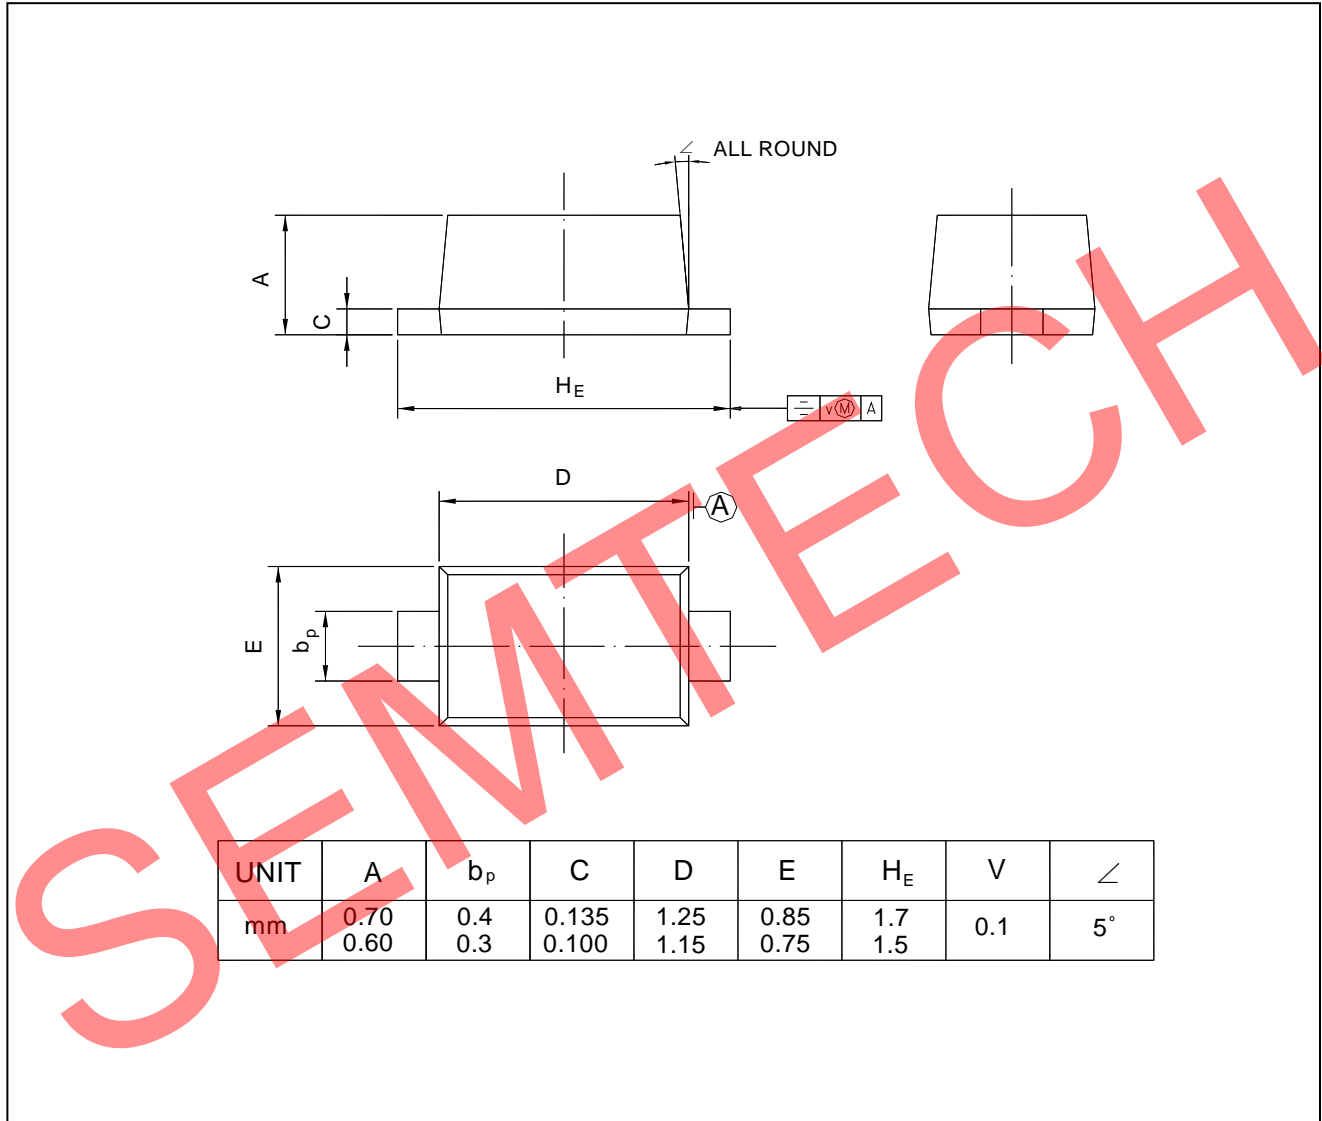

SEMTECH ELECTRONICS LTD.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Semtech](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-](#)
[HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#)
[MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#) [5KP90A](#)