

FR201 THRU FR207


Fast Recovery Rectifiers Reverse Voltage – 50 to 1000 V Forward Current – 2 A

Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

Mechanical Data

- **Case:** Molded plastic, DO-15
- **Lead:** Axial leads, solderable per MIL-STD-202, method 208 guaranteed.
- **Polarity:** Color band denotes cathode end
- **Mounting Position:** Any

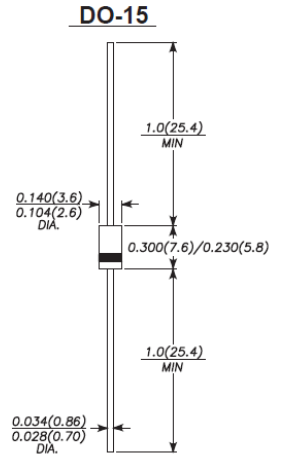

Dimensions in inches and (millimeters)

Absolute Maximum Ratings and Characteristics


Ratings at 25°C ambient temperature unless otherwise specified, single phase, half wave, 60Hz, resistive or inductive load, for capacitive load, derate current by 20%.

Parameter	Symbols	FR201	FR202	FR203	FR204	FR205	FR206	FR207	Units
	Marking	FR201	FR202	FR203	FR204	FR205	FR206	FR207	-
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Average Forward Rectified Current .375" (9.5mm) Lead Length at $T_L = 80^\circ\text{C}$	$I_{F(AV)}$	2							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	60							A
Maximum Forward Voltage at 2A	V_F	1.3							V
Maximum Reverse Current at Rated DC Blocking Voltage $T_J = 25^\circ\text{C}$ $T_J = 100^\circ\text{C}$	I_R	5 100							μA
Maximum Reverse Recovery Time ¹⁾	T_{rr}	150				250	500		ns
Typical Junction Capacitance ²⁾	C_J	40							pF
Typical Thermal Resistance to Lead ³⁾	$R_{\theta JL}$	20							$^\circ\text{C/W}$
Operating Junction and Storage Temperature Range	T_J, T_{stg}	- 55 to + 150							$^\circ\text{C}$

¹⁾ Reverse recovery condition $I_F = 0.5\text{ A}, I_R = 1.0\text{ A}, I_{rr} = 0.25\text{ A}$.








²⁾ Measured at 1MHz and applied reverse voltage of 4.0V D.C.

³⁾ Thermal resistance from junction to ambient at 0.375"(9.5mm) lead length, P.C.B. mounted.



FR201 THRU FR207

Electrical Characteristics Curves

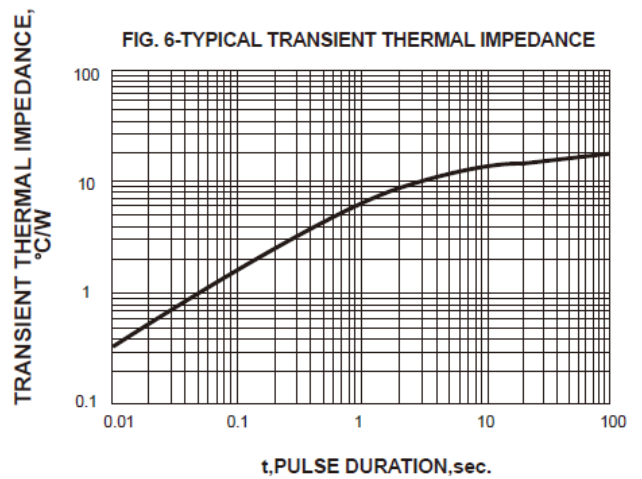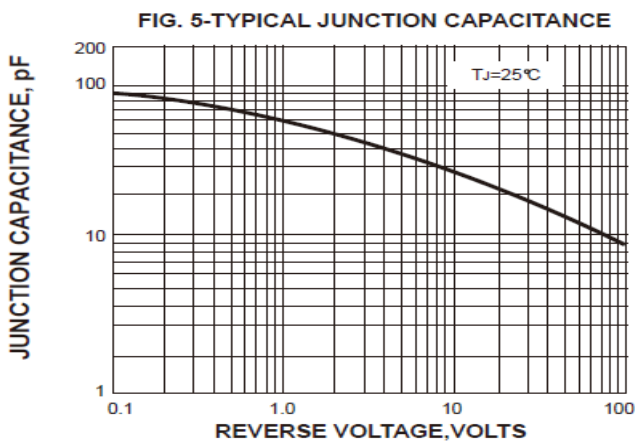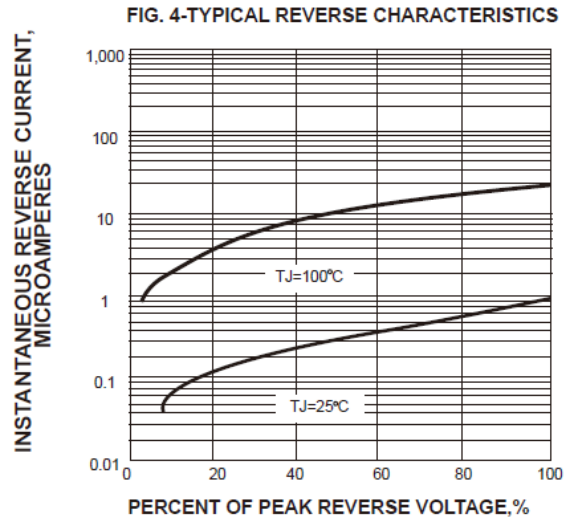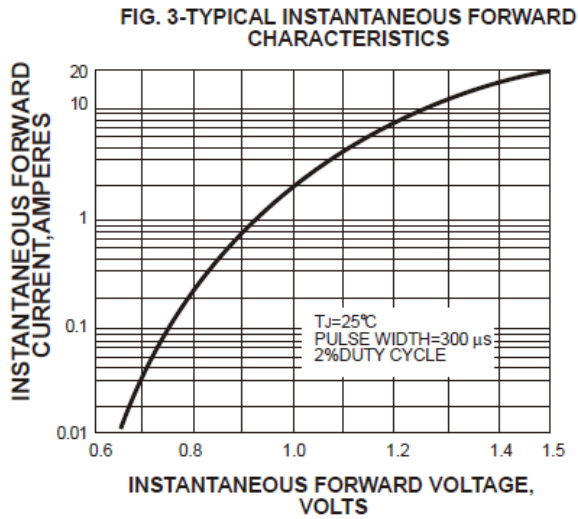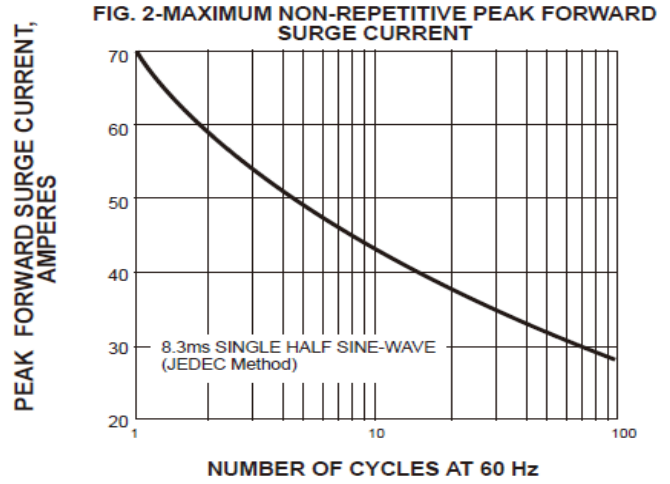
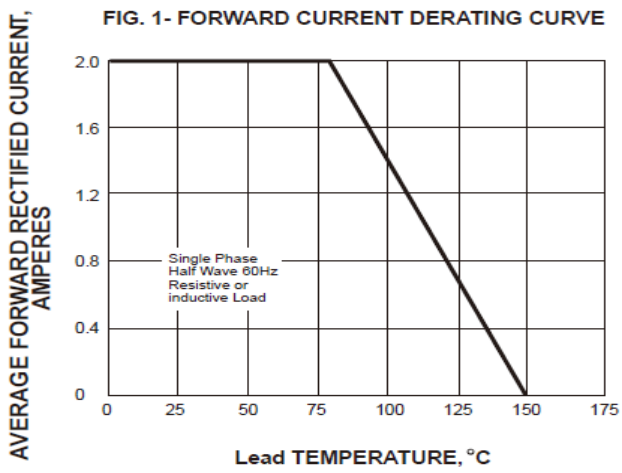


FR201 THRU FR207

Marking information

" ***** " = Part No.

Font type: Arial

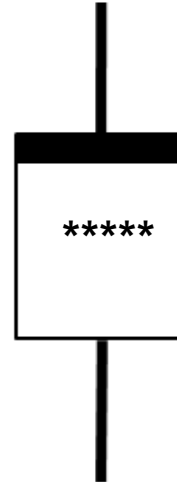

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [Semtech](#) manufacturer:

Other Similar products are found below :

[70HFR40](#) [FR105 R0](#) [RL252-TP](#) [1N5397](#) [1N4005-TR](#) [1N4007-BP](#) [UFS120Je3/TR13](#) [20ETS12S](#) [RRE02VS6SGTR](#) [MS306](#) [A1N5404G-G](#)
[CRF02\(T5L,TEMQ\)](#) [ACGRB207-HF](#) [CLH07\(TE16L,Q\)](#) [CLH03\(TE16L,Q\)](#) [1N5395-TP](#) [UES1302](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [DZ-](#)
[1380](#) [85HFR60](#) [40HFR60](#) [70HF120](#) [85HFR80](#) [SCF7500](#) [SM100](#) [ACGRA4001-HF](#) [SKN70/08](#) [NTE5819](#) [NTE5827](#) [NTE5828](#) [NTE5911](#)
[NTE5915](#) [NTE6104](#) [NTE6163](#) [NTE6164](#) [NTE6165](#) [NTE6364](#) [TSD3G](#) [SET130312](#) [NRVUS110VT3G](#) [UES1106](#) [UES1306](#)
[NRVUS240VT3G](#) [D5FE60-5063](#) [R4000GPS-TP](#) [D4015L56TP](#) [UES1306HR2](#) [FX20K120](#) [D20XB60-7101](#)