

POWER DISCRETES
Description

Quick reference data

$$V_R = 200 - 1000 \text{ V}$$

$$I_o = 1.0\text{A}$$

$$t_{rr} = 2\mu\text{S}$$

$$V_F = 1.1\text{V}$$

Features

- ◆ Low reverse leakage current
- ◆ Hermetically sealed in Metoxilite fused metal oxide
- ◆ Good thermal shock resistance
- ◆ Low forward voltage drop
- ◆ Avalanche capability

These products can be supplied as JANTX levels.

Electrical Specifications

Electrical specifications @ $T_A = 25^\circ\text{C}$ unless otherwise specified.

Types	V_{RWM}	V_F	I_o		I_{FSM}	I_R	T_{RR}	T_{STG} and T_J	$R_{\theta JL}$ L=.375 inch (9.53mm)
			At: $T_J = 25^\circ\text{C}$ $I_o = 1\text{A}$	At: $T_A = +100^\circ\text{C}$ (1)(2)					
	V(pk)	V	A dc	mA dc	A(pk)	μA	μS	$^\circ\text{C}$	$^\circ\text{C/W}$
1N3611	200	1.1	1	300	30	0.5	2	-65 to +175	38
1N3612	400	1.1	1	300	30	0.5	2	-65 to +175	38
1N3613	600	1.1	1	300	30	0.5	2	-65 to +175	38
1N3614	800	1.1	1	300	30	0.5	2	-65 to +175	38
1N3957	1000	1.1	1	300	30	0.5	2	-65 to +175	38

Notes:

(1) From I_o rating is independent of heat sinking, special mounting, or leads of the device.

(2) Derate linearly at 13.3mA between $T_A = +100^\circ\text{C}$ and $T_A = +175^\circ\text{C}$

POWER DISCRETES


Ordering Information

Part Number	Description
1N3611 1N3612 1N3613 1N3614 1N3957	Axial leaded hermetically sealed ⁽¹⁾

Note:

(1) Available in bulk or tape and reel packaging. Please consult factory for quantities.

Outline Drawing

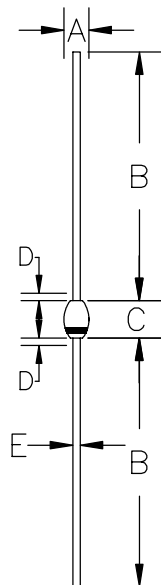

G2

DIM ^N	DIMENSIONS				NOTE
	MM		INCHES		
A	1.6	2.8	.065	.110	—
B	25.4	33.0	1.00	1.30	—
C	3.5	4.2	.140	.165	—
D	—	.80	—	.030	1
E	.66	.84	.026	.033	—

NOTES:

1. LEAD DIAMETER UNCONTROLLED OVER THIS REGION.

CATHODE IS DENOTED BY A BAND.

Contact Information

Semtech Corporation
Power Discrettes Products Division
200 Flynn Road, Camarillo, CA 93012
Phone: (805)498-2111 FAX (805)498-3804

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [Semtech](#) manufacturer:

Other Similar products are found below :

[70HFR40](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [NTE5841](#) [NTE6038](#) [SCF5000](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [VS-80-7161](#) [481235F](#)
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS04\(T5L,TEMQ\)](#) [ACGRA4007-HF](#)
[ACGRB207-HF](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [NTE6002](#) [NTE6023](#) [NTE6039](#) [NTE6077](#)
[85HFR60](#) [40HFR60](#) [1N1186RA](#) [70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#)
[VS-12FL100S10](#) [ACGRA4001-HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE5990](#) [NTE6358](#)