

DESCRIPTION

The 1N61xx series of transient voltage suppressors are designed to protect military and commercial electronic equipment from overvoltages caused by lightning, ESD, EFT, inductive load switching, and EMP. These devices are constructed using two p-n junction TVS diodes in a back-to-back configuration, hermetically sealed in a voidless glass package. The hermetically sealed package provides high reliability in harsh environmental conditions. TVS diodes are further characterized by their high surge capability, low operating and clamping voltages, and a theoretically instantaneous response time. This makes them ideal for use as board level protection for sensitive semiconductor components.

FEATURES:

- 1500 Watts Peak Pulse Power (tp = 10/1000µs)
- Voidless hermetically sealed glass package
- Metallurgically bonded
- High surge capacity
- Military & Industrial applications
- Available in **JAN**, **JTX**, **JTXV** and **JANS** versions per MIL-S-19500/516

MECHANICAL CHARACTERISTICS:

- Hermetically sealed glass package
- Tinned copper leads
- Marking : P/N, date code, logo

MAXIMUM RATINGS

| RATING | SYMBOL | VALUE | UNIT |
|---|--------|-------------|-------|
| Peak Pulse Power (tp = 10 x 1000µs) | Ppk | 1500 | Watts |
| Operating Temperature | Tj | -65 to +175 | °C |
| Storage Temperature | Tstg | -65 to +175 | °C |
| Steady-State Power Dissipation @ TL = 75°C (3/8") | PD | 5 | Watts |

ELECTRICAL CHARACTERISTICS @ 25°C (unless otherwise specified)


| DEVICE TYPE | REVERSE STAND-OFF VOLTAGE V _{RWM} | REVERSE LEAKAGE CURRENT I _R | MINIMUM BREAKDOWN VOLTAGE V _{BR} @ I _T | TEST CURRENT I _T | MAXIMUM CLAMPING VOLTAGE V _C @ I _{PP} | PEAK PULSE CURRENT I _{pp} tp = 1mS | TEMPERATURE COEFFICIENT OF V _{BR} αVz | MAXIMUM REVERSE LEAKAGE CURRENT (I _{R2}) TA=+150°C |
|-------------|---|---|---|--------------------------------|--|---|--|---|
| | (V) | (µA) | (V) | (mA) | (V) | (A) | % / °C | (A) |
| 1N6138A | 5.2 | 500 | 6.46 | 175 | 10.5 | 142.8 | 0.05 | 12000 |
| 1N6139A | 5.7 | 300 | 7.13 | 175 | 11.2 | 133.9 | 0.06 | 3000 |
| 1N6140A | 6.2 | 100 | 7.79 | 150 | 12.1 | 124.0 | 0.06 | 2000 |
| 1N6141A | 6.9 | 100 | 8.65 | 150 | 13.4 | 111.9 | 0.06 | 1200 |
| 1N6142A | 7.6 | 100 | 9.50 | 125 | 14.5 | 103.4 | 0.07 | 800 |
| 1N6143A | 8.4 | 20 | 10.45 | 125 | 15.6 | 96.2 | 0.07 | 800 |
| 1N6144A | 9.1 | 20 | 11.40 | 100 | 16.9 | 88.8 | 0.07 | 600 |
| 1N6145A | 9.9 | 20 | 12.35 | 100 | 18.2 | 82.4 | 0.08 | 600 |
| 1N6146A | 11.4 | 20 | 14.25 | 75 | 21.0 | 71.4 | 0.08 | 400 |
| 1N6147A | 12.2 | 20 | 15.20 | 75 | 22.3 | 67.3 | 0.08 | 400 |
| 1N6148A | 13.7 | 10 | 17.10 | 65 | 25.1 | 59.8 | 0.085 | 400 |
| 1N6149A | 15.2 | 5 | 19.0 | 65 | 27.7 | 54.2 | 0.085 | 400 |
| 1N6150A | 16.7 | 5 | 20.9 | 50 | 30.5 | 49.2 | 0.085 | 400 |
| 1N6151A | 18.2 | 5 | 22.8 | 50 | 33.3 | 45.0 | 0.09 | 400 |
| 1N6152A | 20.6 | 5 | 25.7 | 50 | 37.4 | 40.1 | 0.09 | 400 |
| 1N6153A | 22.8 | 5 | 28.5 | 40 | 41.6 | 36.0 | 0.09 | 400 |
| 1N6154A | 25.1 | 5 | 31.4 | 40 | 45.7 | 32.8 | 0.095 | 400 |
| 1N6155A | 27.4 | 5 | 34.2 | 30 | 49.9 | 30.1 | 0.095 | 400 |
| 1N6156A | 29.7 | 5 | 37.1 | 30 | 53.6 | 28.0 | 0.095 | 400 |
| 1N6157A | 32.7 | 5 | 40.9 | 30 | 59.1 | 25.4 | 0.095 | 400 |
| 1N6158A | 35.8 | 5 | 44.7 | 25 | 64.6 | 23.2 | 0.095 | 400 |
| 1N6159A | 38.8 | 5 | 48.5 | 25 | 70.1 | 21.4 | 0.095 | 400 |
| 1N6160A | 42.6 | 5 | 53.2 | 20 | 77.0 | 19.5 | 0.095 | 400 |
| 1N6161A | 47.1 | 5 | 58.9 | 20 | 85.3 | 17.6 | 0.100 | 400 |
| 1N6162A | 51.7 | 5 | 64.6 | 20 | 97.1 | 15.4 | 0.100 | 400 |
| 1N6163A | 56.0 | 5 | 71.3 | 20 | 103.1 | 14.5 | 0.100 | 400 |
| 1N6164A | 62.2 | 5 | 77.9 | 15 | 112.8 | 13.3 | 0.100 | 400 |
| 1N6165A | 69.2 | 5 | 86.5 | 15 | 125.1 | 12.0 | 0.100 | 400 |
| 1N6166A | 76.0 | 5 | 95.0 | 12 | 137.6 | 10.9 | 0.100 | 400 |
| 1N6167A | 83.6 | 5 | 104.5 | 12 | 151.3 | 9.9 | 0.100 | 400 |
| 1N6168A | 91.2 | 5 | 114.0 | 10 | 165.1 | 9.1 | 0.100 | 400 |
| 1N6169A | 98.8 | 5 | 123.5 | 10 | 178.8 | 8.4 | 0.105 | 400 |
| 1N6170A | 114.0 | 5 | 142.5 | 8 | 206.3 | 7.3 | 0.105 | 400 |
| 1N6171A | 121.6 | 5 | 152.0 | 8 | 218.4 | 6.9 | 0.105 | 400 |
| 1N6172A | 136.8 | 5 | 171.0 | 5 | 245.7 | 6.1 | 0.110 | 400 |
| 1N6173A | 152.0 | 5 | 190.0 | 5 | 273.0 | 5.5 | 0.110 | 400 |

1. Non-A Part has 5% higher clamping voltage, 5% lower minimum breakdown voltage, and 5% lower peak pulse current.

PEAK PULSE POWER vs. PULSE TIME



10x1000μs IMPULSE WAVEFORM

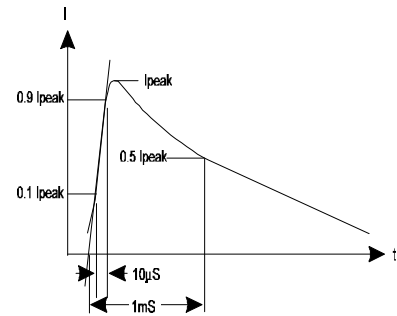

STEADY STATE DERATING CHARACTERISTICS FOR FREE AIR MOUNTING



PULSE DERATING CURVE



MECHANICAL OUTLINE



| DIM N | DIMENSIONS | | | | NOTE |
|-------|------------|-------|-------|-------|------|
| | INCHES | | MM | | |
| | MIN | MAX | MIN | MAX | |
| A | 0.135 | 0.185 | 3.40 | 4.70 | |
| B | 0.900 | 1.300 | 22.86 | 33.02 | |
| C | 0.140 | 0.195 | 3.5 | 4.95 | 2 |
| D | 0.036 | 0.042 | 0.91 | 1.07 | |

- NOTES :
- Controlling dimension is inches.
 - Includes uncontrolled area of device leads.

SCHEMATIC



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Semtech](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D12V0H1U2WS-7](#) [D18V0L1B2LP-7B](#) [82356050220](#) [D5V0M5U6V-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#)
[P6KE8.2A](#) [SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ8.0A](#) [SMLJ30CA-TP](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#)
[ESD119B1W01005E6327XTSA1](#) [ESD5V0J4-TP](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [ESD203-B1-02EL E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#)
[82350120560](#) [82356240030](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDUR24V-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#)
[CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [ESDLIN1524BJ-HQ](#) [5KP100A](#)