

January 7, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

### QUICK REFERENCE DATA

- $V_R = 2kV - 3kV$
- $I_F = 330mA$
- $t_{rr} = 2.0\mu S$
- $I_R = 0.25\mu A$

### AXIAL LEADED HERMETICALLY SEALED HIGH VOLTAGE STANDARD RECOVERY RECTIFIER DIODE

- High thermal shock resistance
- Hermetically sealed with Metoxilite fused metal oxide
- Low reverse leakage currents
- Miniature packaging
- Monolithic cavity free

### ABSOLUTE MAXIMUM RATINGS (@ 25°C unless otherwise specified)

	Symbol	M20	M30	Unit
Working reverse voltage	$V_{RWM}$	2000	3000	V
Repetitive reverse voltage	$V_{RRM}$	2000	3000	V
Surge reverse voltage	$V_{RSM}$	2000	3000	V
Average forward current (@ 55°C in oil)	$I_{F(AV)}$	← 330 →		mA
Repetitive surge current (@ 55°C)	$I_{FRM}$	← 1.3 →		A
Non-repetitive surge current ( $t_p = 8.3mS$ , @ $V_R$ & $T_{jmax}$ )	$I_{FSM}$	← 7.0 →		A
Storage temperature range	$T_{STG}$	-65 to +175		°C
Operating temperature range	$T_{OP}$	-65 to +175		°C

### MECHANICAL

G66

DIM #	DIMENSIONS				
	MM		INCHES		NOTE
A	-	2.3	-	.09	
B	25.4	33.0	1.00	1.30	-
C	4.6	5.3	.18	.21	-
D	-	.80	-	.030	1
E	.53	.66	.021	.026	-

NOTES:

1. LEAD DIAMETER UNCONTROLLED OVER THIS REGION.

Weight = 0.01oz

January 7, 1998

**CHARACTERISTICS** (@ 25°C unless otherwise specified)

	Symbol	M20	M30	Unit
Average forward current for sine wave - max. pcb mounted; T <sub>A</sub> = 55°C	I <sub>F(AV)</sub>	← 175 →	← 330 →	mA
- max. in unstirred oil	I <sub>F(AV)</sub>	← 330 →	← 330 →	mA
I <sup>2</sup> t for fusing (t = 8.3mS) max.	I <sup>2</sup> t	← 0.2 →	← 0.2 →	A <sup>2</sup> S
Forward voltage drop max. @ I <sub>F</sub> = 125mA, T <sub>j</sub> = 25°C	V <sub>F</sub>	← 5.0 →	← 5.0 →	V
Reverse current max. @ V <sub>RWM</sub> , T <sub>j</sub> = 25°C	I <sub>R</sub>	← 0.25 →	← 0.25 →	μA
@ V <sub>RWM</sub> , T <sub>j</sub> = 100°C	I <sub>R</sub>	← 10 →	← 10 →	μA
Reverse recovery time max. 50mA I <sub>F</sub> to 100mA I <sub>R</sub> . Recover to 25mA I <sub>RR</sub> .	t <sub>rr</sub>	← 2.0 →	← 2.0 →	μS
Junction capacitance typ. @ V <sub>R</sub> = 5V, f = 1MHz	C <sub>j</sub>	← 1.7 →	← 1.7 →	ρF
Thermal resistance - junction to oil Unstirred @ 55°C	R <sub>θJO</sub>	← 48 →	← 48 →	°C/W
Stirred @ 55°C	R <sub>θJO</sub>	← 30 →	← 30 →	°C/W
Thermal resistance - junction to amb. on 0.06" thick pcb. 1oz copper.	R <sub>θJA</sub>	← 120 →	← 120 →	°C/W

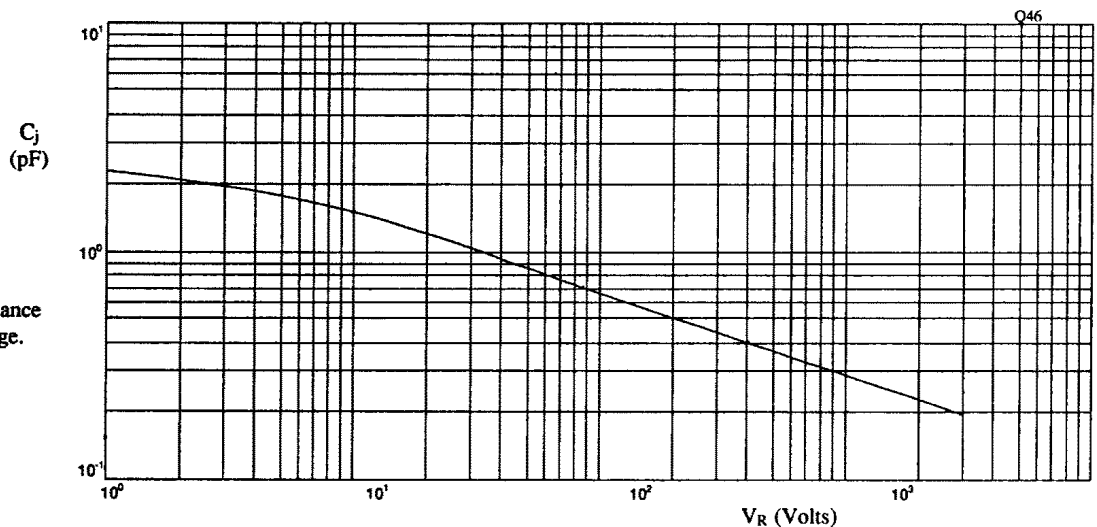


Fig 1. Junction capacitance against reverse voltage.

January 7, 1998

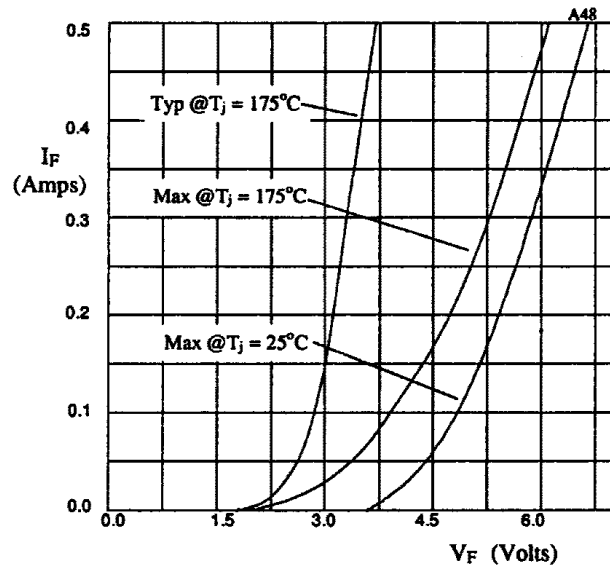


Fig 2. Forward voltage drop as a function of forward current.

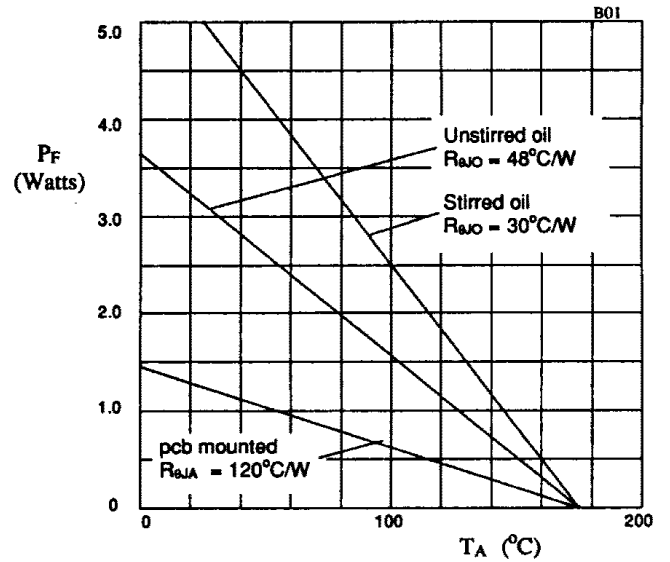


Fig 3. Power derating in air and oil.

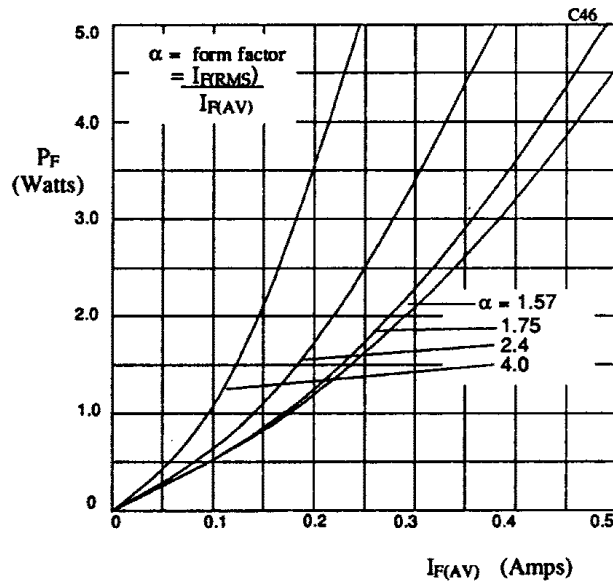


Fig 4. Forward power dissipation as a function of forward current, for sinusoidal operation.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Rectifiers](#) category:*

*Click to view products by [Semtech](#) manufacturer:*

Other Similar products are found below :

[70HFR40](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [NTE5841](#) [NTE6038](#) [SCF5000](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [481235F](#)  
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T110HF60](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS04\(T5L,TEMQ\)](#) [ACGRA4007-HF](#)  
[ACGRB207-HF](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [NTE6002](#) [NTE6023](#) [NTE6039](#) [NTE6077](#)  
[85HFR60](#) [40HFR60](#) [1N1186RA](#) [70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#)  
[VS-12FL100S10](#) [ACGRA4001-HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE5990](#) [NTE6358](#)