

# RS1AD THRU RS1MD

## SURFACE MOUNT FAST RECOVERY RECTIFIERS

Reverse Voltage - 50 to 1000 V

Forward Current - 1 A


### Features

- High current capability
- High surge current capability
- High reliability
- Low reverse current
- Fast switching for high efficiency

### Mechanical Data

- **Case:** SMA (DO-214AC) molded plastic
- **Mounting position:** Any
- **Lead:** Lead formed for surface mount
- **Polarity:** Color band denotes cathode end

SMA (DO-214AC)

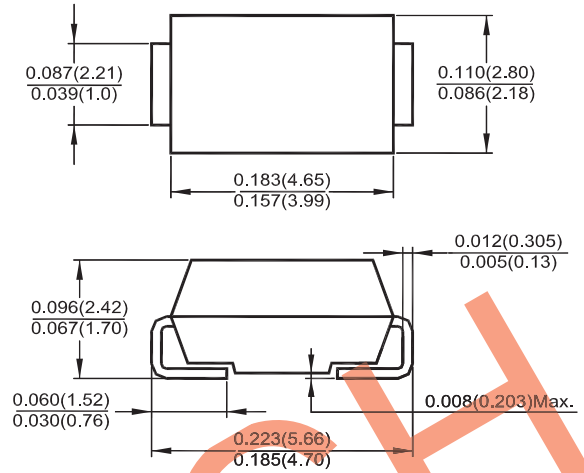

Dimensions in inches and (millimeters)

### Absolute Maximum Ratings and Characteristics


Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	RS1AD	RS1BD	RS1DD	RS1GD	RS1JD	RS1KD	RS1MD	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Current at $T_L = 90^\circ\text{C}$	$I_{F(AV)}$	1							A
Peak Forward Surge Current 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	30							A
Maximum Forward Voltage at 1 A	$V_F$	1.3							V
Maximum DC Reverse Current at $T_A = 25^\circ\text{C}$ at Rated DC Blocking Voltage at $T_A = 100^\circ\text{C}$	$I_R$	5							$\mu\text{A}$
		50							
Maximum Reverse Recovery Time <sup>1)</sup>	$t_{rr}$	150			250	500	ns		
Typical Junction Capacitance <sup>2)</sup>	$C_J$	15							pF
Typical Thermal Resistance <sup>3)</sup>	$R_{\theta JA}$	50							$^\circ\text{C/W}$
Operating and Storage Temperature Range	$T_J, T_{stg}$	- 65 to + 150							$^\circ\text{C}$

<sup>1)</sup> Reverse recovery test conditions  $I_F = 0.5\text{ A}$ ,  $I_R = 1\text{ A}$ ,  $I_{rr} = 0.25\text{ A}$ .

<sup>2)</sup> Measured at 1 MHz and applied reverse voltage of 4 V.

<sup>3)</sup> P.C.B. mounted with 0.2 X 0.2" (5 X 5 mm) copper pad areas.










**SEMTECH ELECTRONICS LTD.**



Dated : 09/12/2014 GD Rev:03

# RS1AD THRU RS1MD

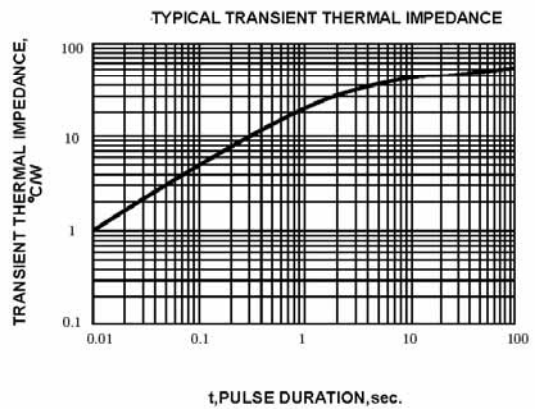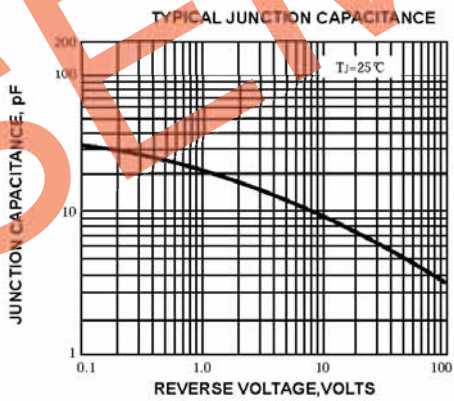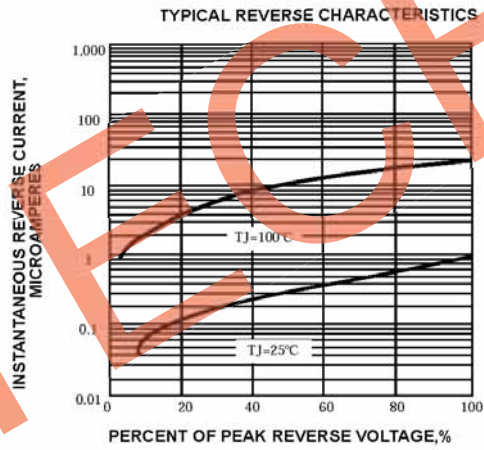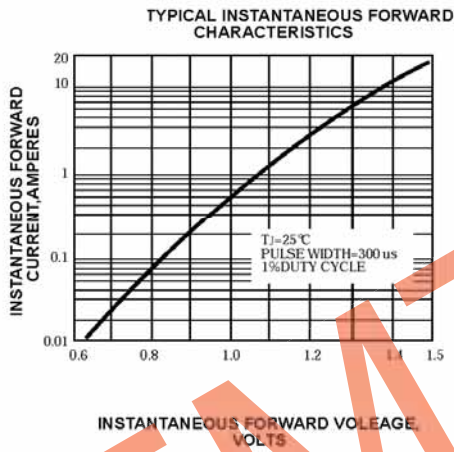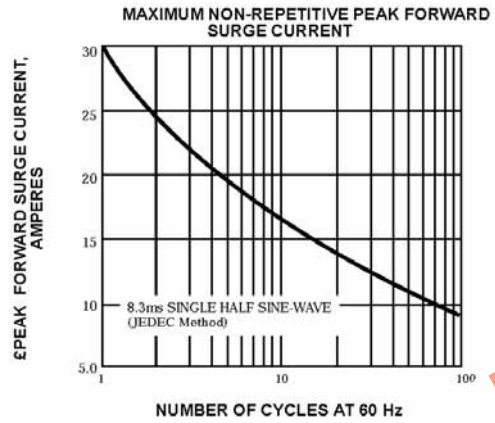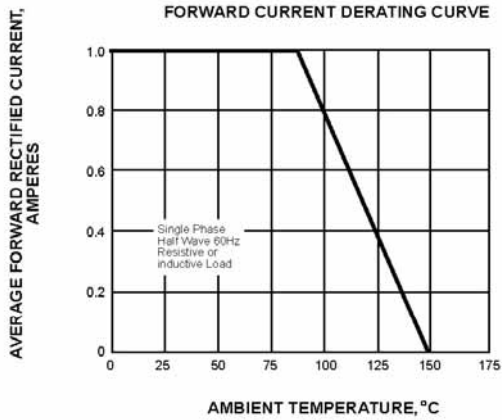

**SEMTECH ELECTRONICS LTD.**



Dated : 09/12/2014 GD Rev:03

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Rectifiers](#) category:*

*Click to view products by [Semtech](#) manufacturer:*

Other Similar products are found below :

[70HFR40](#) [FR105 R0](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [1N4002G](#) [1N4005-TR](#) [UFS120Je3/TR13](#) [JANS1N6640US](#) [481235F](#)  
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T110HF60](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS04\(T5L,TEMQ\)](#)  
[CRS12\(T5L,TEMQ\)](#) [ACGRB207-HF](#) [CLH07\(TE16L,Q\)](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [85HFR60](#)  
[40HFR60](#) [70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SDHD5K](#) [VS-12FL100S10](#) [ACGRA4001-](#)  
[HF](#) [ACURA107-HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE6358](#) [NTE5850](#) [NTE5819](#) [NTE5837](#) [NTE5892](#) [NTE5900](#) [NTE5911](#)