

January 16, 1998

**STANDARD RECOVERY, PCB MOUNTING, 1-PHASE
FULL WAVE BRIDGE RECTIFIER ASSEMBLIES**

- Low forward voltage drop
- Low reverse leakage current
- Subminiature design for pcb mounting
- V_{RWM} up to 3000V
- Pcb mounting

**QUICK REFERENCE
DATA**


- $V_R = 50V - 3000V$
- $I_F = 0.36 - 1.5A$
- $I_R = 2.0 \mu A$
- $t_{rr} = 2 - 2.5 \mu S$

ABSOLUTE MAXIMUM RATINGS & CHARACTERISTICS

Device Type	Working Reverse Voltage V_{RWM}	Average Rectified Current $I_F(AV)$		Repetitive Surge Current I_{FRM}	Reverse Leakage Current $I_R @ V_{RWM}$		Forward Voltage drop / leg $V_F @ 1A$ * @ 250mA	Reverse Recovery Time t_{rr} @ 25°C
		@ 55°C	@ 100°C		@ 25°C	@ 100°C		
		Amps	Amps		μA	μA		
SBR05	50	1.5	1.0	10	2.0	50	1.1	2.0
SBR1	100	1.5	1.0	10	2.0	50	1.1	
SBR2	200	1.5	1.0	10	2.0	50	1.1	
SBR4	400	1.5	1.0	10	2.0	50	1.1	
SBR6	600	1.5	1.0	10	2.0	50	1.1	
SBR8	800	1.5	1.0	10	2.0	50	1.1	
SBR10	1000	1.5	1.0	10	2.0	50	1.1	2.5
SBR15	1500	0.36	0.24	2.5	2.0	50	* 5.0	
SBR20	2000	0.36	0.24	2.5	2.0	50	* 5.0	
SBR25	2500	0.36	0.24	2.5	2.0	50	* 5.0	
SBR30	3000	0.36	0.24	2.5	2.0	50	* 5.0	

MECHANICAL

¹ Measured on discrete devices prior to assembly

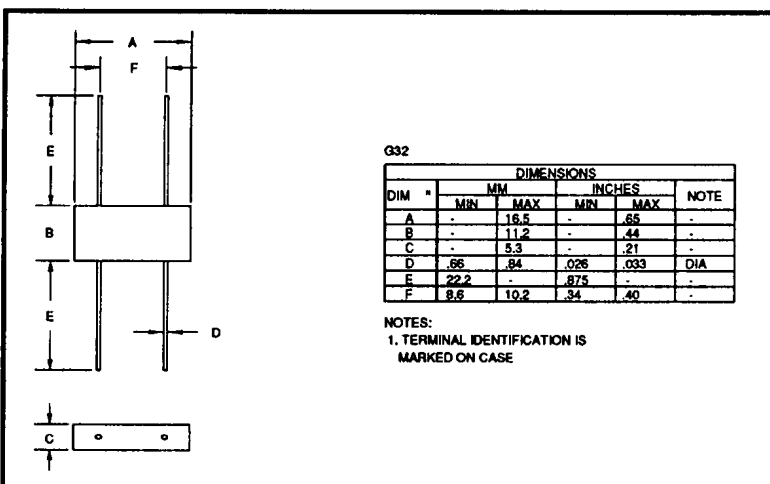

SBR10 and SBR30 are available in Europe to DEF STAN 59-61/90/213 release to F and FX levels.

January 16, 1998

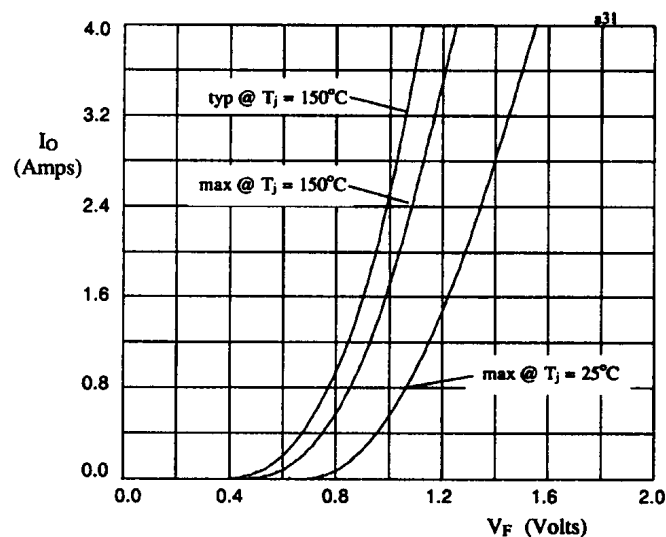


Fig 1. Forward voltage drop against output current per leg for SBR05 thru SBR10.

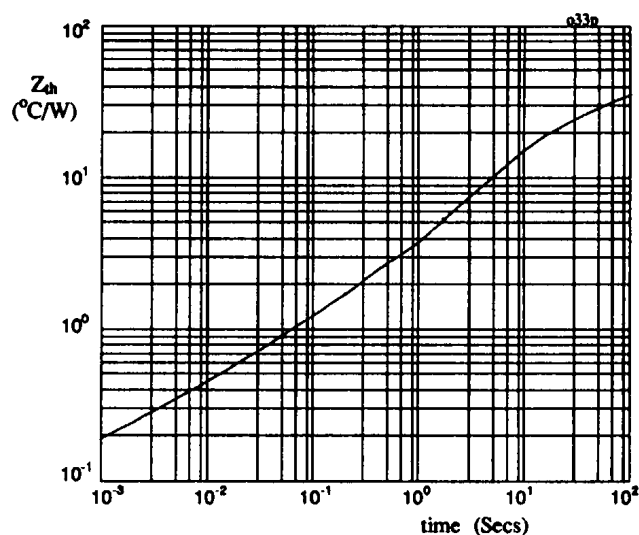


Fig 2. Transient thermal impedance characteristic per leg for SBR05 thru SBR10

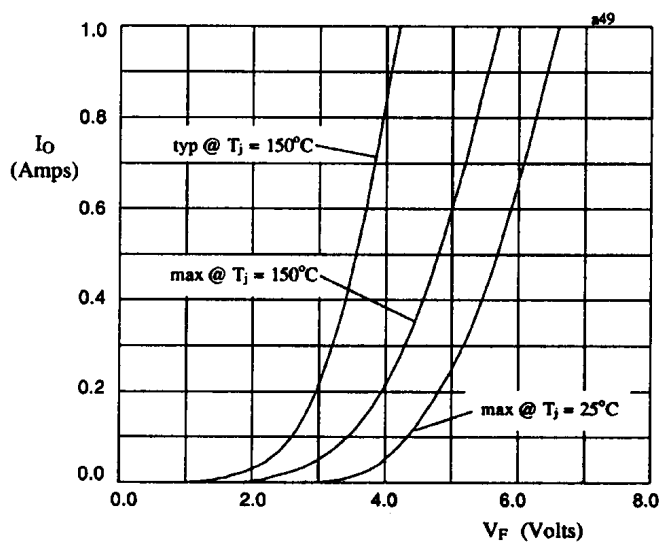


Fig 3. Forward voltage drop against output current per leg for SBR15 thru SBR30

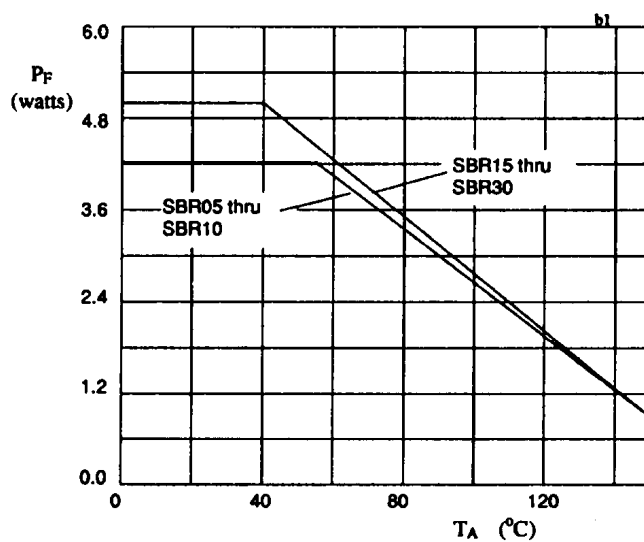


Fig 4. Power derating characteristics when p.c.b mounted

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Semtech](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [DB101-BP](#) [DBA100G](#) [DBA150G](#)
[DBA250G](#) [DBA40G](#) [DBA500G](#) [DBD10G-TM-E](#) [DF01](#) [KBPC50-10S](#) [RS405GL-BP](#) [GBJ1502-BP](#) [GBU6M](#) [TB102M](#) [MB1510](#) [MB86](#)
[TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [KBPC25-02](#) [DB105-BP](#) [DBB08G-TM-E](#) [DF1510S](#)
[MQSPA25](#) [GBU4G-BP](#) [TB354](#) [GBJ2504-BP](#) [B1S-G](#) [GBU10D-BP](#) [ABS10-G](#) [GBU6B-BP](#) [GBJ1508-BP](#) [BR5010-G](#) [ABS6-G](#) [B125C800G-](#)
[E4/51](#) [MSB15MH-13](#) [LBS10-13](#) [S3PDB60N18](#)