

ZMM 1...ZMM200

SILICON PLANAR ZENER DIODES

in MiniMELF case especially for automatic insertion. The Zener voltages are graded according to the international E 24 standard. Smaller voltage tolerances and higher Zener voltages are upon request.

These diodes are also available in DO-35 case with the type designation BZX55C...

LL-34



Glass case MiniMELF
Dimensions in mm

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

| | Symbol | Value | Unit |
|--|------------------|-------------------|------------------|
| Power Dissipation | P_{tot} | 500 ¹⁾ | mW |
| Junction Temperature | T_j | 175 | $^\circ\text{C}$ |
| Storage Temperature Range | T_s | -55 to +175 | $^\circ\text{C}$ |
| ¹⁾ Valid provided that electrodes are kept at ambient temperature | | | |

Characteristics at $T_{\text{amb}} = 25^\circ\text{C}$

| | Symbol | Min. | Typ. | Max. | Unit |
|--|------------------|------|------|-------------------|------|
| Thermal Resistance Junction to Ambient Air | R_{thA} | - | - | 0.3 ¹⁾ | K/mW |
| Forward Voltage at $I_F = 100\text{mA}$ | V_F | - | - | 1 | V |
| ¹⁾ Valid provided that electrodes are kept at ambient temperature | | | | | |



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103



ISO 14001:2004
Certificate No. 71116



ISO 9001:2000
Certificate No. 0506098

Dated : 20/09/2005

ZMM 1...ZMM200

| Type | Zener Voltage Range ¹⁾ | | | Dynamic Resistance | | | Reverse Leakage Current | | | Temp coefficient of Zener Voltage |
|---------------------|-----------------------------------|-----------------------|--|-----------------------|--|-----------------------|----------------------------|-----------------------------|---------------------------------------|-----------------------------------|
| | V _{znom} V | I _{ZT} mA | for V _{ZT} ²⁾ V | r _{ZJT} Ω | r _{ZJK} at I _{ZK} Ω | I _{ZK} mA | T _a =25°C μA | T _a =125°C μA | I _R at V _R V | TKvz %/K |
| ZMM 1 ³⁾ | 0.75 | 5 | 0.7...0.8 | <8 | <50 | 1 | -- | -- | -- | -0.26...-0.23 |
| ZMM 2V0 | 2.0 | 5 | 1.80...2.15 | <85 | <600 | 1 | <100 | <200 | 1 | -0.09...-0.06 |
| ZMM 2V2 | 2.2 | 5 | 2.08...2.33 | <85 | <600 | 1 | <75 | <160 | 1 | -0.09...-0.06 |
| ZMM 2V4 | 2.4 | 5 | 2.28...2.56 | <85 | <600 | 1 | <50 | <100 | 1 | -0.09...-0.06 |
| ZMM 2V7 | 2.7 | 5 | 2.5...2.9 | <85 | <600 | 1 | <10 | <50 | 1 | -0.09...-0.06 |
| ZMM 3V0 | 3.0 | 5 | 2.8...3.2 | <85 | <600 | 1 | <4 | <40 | 1 | -0.08...-0.05 |
| ZMM 3V3 | 3.3 | 5 | 3.1...3.5 | <85 | <600 | 1 | <2 | <40 | 1 | -0.08...-0.05 |
| ZMM 3V6 | 3.6 | 5 | 3.4...3.8 | <85 | <600 | 1 | <2 | <40 | 1 | -0.08...-0.05 |
| ZMM 3V9 | 3.9 | 5 | 3.7...4.1 | <85 | <600 | 1 | <2 | <40 | 1 | -0.08...-0.05 |
| ZMM 4V3 | 4.3 | 5 | 4.0...4.6 | <75 | <600 | 1 | <1 | <20 | 1 | -0.06...-0.03 |
| ZMM 4V7 | 4.7 | 5 | 4.4...5.0 | <60 | <600 | 1 | <0.5 | <10 | 1 | -0.05...+0.02 |
| ZMM 5V1 | 5.1 | 5 | 4.8...5.4 | <35 | <550 | 1 | <0.1 | <2 | 1 | -0.02...+0.02 |
| ZMM 5V6 | 5.6 | 5 | 5.2...6.0 | <25 | <450 | 1 | <0.1 | <2 | 1 | -0.05...+0.05 |
| ZMM 6V2 | 6.2 | 5 | 5.8...6.6 | <10 | <200 | 1 | <0.1 | <2 | 2 | 0.03...0.06 |
| ZMM 6V8 | 6.8 | 5 | 6.4...7.2 | <8 | <150 | 1 | <0.1 | <2 | 3 | 0.03...0.07 |
| ZMM 7V5 | 7.5 | 5 | 7.0...7.9 | <7 | <50 | 1 | <0.1 | <2 | 5 | 0.03...0.07 |
| ZMM 8V2 | 8.2 | 5 | 7.7...8.7 | <7 | <50 | 1 | <0.1 | <2 | 6.2 | 0.03...0.08 |
| ZMM 9V1 | 9.1 | 5 | 8.5...9.6 | <10 | <50 | 1 | <0.1 | <2 | 6.8 | 0.03...0.09 |
| ZMM 10 | 10 | 5 | 9.4...10.6 | <15 | <70 | 1 | <0.1 | <2 | 7.5 | 0.03...0.1 |
| ZMM 11 | 11 | 5 | 10.4...11.6 | <20 | <70 | 1 | <0.1 | <2 | 8.2 | 0.03...0.11 |
| ZMM 12 | 12 | 5 | 11.4...12.7 | <20 | <90 | 1 | <0.1 | <2 | 9.1 | 0.03...0.11 |
| ZMM 13 | 13 | 5 | 12.4...14.1 | <26 | <110 | 1 | <0.1 | <2 | 10 | 0.03...0.11 |
| ZMM 15 | 15 | 5 | 13.8...15.6 | <30 | <110 | 1 | <0.1 | <2 | 11 | 0.03...0.11 |
| ZMM 16 | 16 | 5 | 15.3...17.1 | <40 | <170 | 1 | <0.1 | <2 | 12 | 0.03...0.11 |
| ZMM 18 | 18 | 5 | 16.8...19.1 | <50 | <170 | 1 | <0.1 | <2 | 13 | 0.03...0.11 |
| ZMM 20 | 20 | 5 | 18.8...21.2 | <55 | <220 | 1 | <0.1 | <2 | 15 | 0.03...0.11 |
| ZMM 22 | 22 | 5 | 20.8...23.3 | <55 | <220 | 1 | <0.1 | <2 | 16 | 0.04...0.12 |
| ZMM 24 | 24 | 5 | 22.8...25.6 | <80 | <220 | 1 | <0.1 | <2 | 18 | 0.04...0.12 |
| ZMM 27 | 27 | 5 | 25.1...28.9 | <80 | <220 | 1 | <0.1 | <2 | 20 | 0.04...0.12 |
| ZMM 30 | 30 | 5 | 28...32 | <80 | <220 | 1 | <0.1 | <2 | 22 | 0.04...0.12 |
| ZMM 33 | 33 | 5 | 31...35 | <80 | <220 | 1 | <0.1 | <2 | 24 | 0.04...0.12 |
| ZMM 36 | 36 | 5 | 34...38 | <80 | <220 | 1 | <0.1 | <2 | 27 | 0.04...0.12 |
| ZMM 39 | 39 | 2.5 | 37...41 | <90 | <500 | 0.5 | <0.1 | <5 | 30 | 0.04...0.12 |
| ZMM 43 | 43 | 2.5 | 40...46 | <90 | <500 | 0.5 | <0.1 | <5 | 33 | 0.04...0.12 |
| ZMM 47 | 47 | 2.5 | 44...50 | <110 | <600 | 0.5 | <0.1 | <5 | 36 | 0.04...0.12 |
| ZMM 51 | 51 | 2.5 | 48...54 | <125 | <700 | 0.5 | <0.1 | <10 | 39 | 0.04...0.12 |
| ZMM 56 | 56 | 2.5 | 52...60 | <135 | <700 | 0.5 | <0.1 | <10 | 43 | 0.04...0.12 |
| ZMM 62 | 62 | 2.5 | 58...66 | <150 | <1000 | 0.5 | <0.1 | <10 | 47 | 0.04...0.12 |
| ZMM 68 | 68 | 2.5 | 64...72 | <200 | <1000 | 0.5 | <0.1 | <10 | 51 | 0.04...0.12 |
| ZMM 75 | 75 | 2.5 | 70...79 | <250 | <1000 | 0.5 | <0.1 | <10 | 56 | 0.04...0.12 |
| ZMM 82 | 82 | 2.5 | 77...87 | <300 | <1500 | 0.25 | <0.1 | <10 | 62 | 0.05...0.12 |
| ZMM 91 | 91 | 1 | 85...96 | <450 | <2000 | 0.1 | <0.1 | <10 | 68 | 0.05...0.12 |
| ZMM 100 | 100 | 1 | 94...106 | <450 | <5000 | 0.1 | <0.1 | <10 | 75 | 0.05...0.12 |
| ZMM 110 | 110 | 1 | 104...116 | <600 | <5000 | 0.1 | <0.1 | <10 | 82 | 0.05...0.12 |
| ZMM 120 | 120 | 1 | 114...127 | <800 | <5500 | 0.1 | <0.1 | <10 | 91 | 0.05...0.12 |
| ZMM 130 | 130 | 1 | 124...141 | <950 | <6000 | 0.1 | <0.1 | <10 | 100 | 0.05...0.12 |
| ZMM 150 | 150 | 1 | 138...156 | <1250 | <6500 | 0.1 | <0.1 | <10 | 110 | 0.05...0.12 |
| ZMM 160 | 160 | 1 | 153...171 | <1400 | <7000 | 0.1 | <0.1 | <10 | 120 | 0.05...0.12 |
| ZMM 180 | 180 | 1 | 168...191 | <1700 | <8500 | 0.1 | <0.1 | <10 | 130 | 0.05...0.12 |
| ZMM 200 | 200 | 1 | 188...212 | <2000 | <10000 | 0.1 | <0.1 | <10 | 150 | 0.05...0.12 |

- 1) Tested with pulses t_p = 20 ms.
- 2) Valid provided that electrodes are kept at ambient temperature
- 3) The ZMM1 is a silicon diode with operation in forward direction. Hence, the index of all parameters should be "F" instead of "Z". Connect the cathode electrode to the negative pole.



SEMTECH ELECTRONICS LTD.
 (Subsidiary of Sino-Tech International Holdings Limited, a company
 listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
 Certificate No. 05103

ISO 14001:2004
 Certificate No. 7116

ISO 9001:2000
 Certificate No. 0506098

Dated : 20/09/2005

ZMM 1...ZMM200

Breakdown characteristics
 $T_j = \text{constant (pulsed)}$



Breakdown characteristics
 $T_j = \text{constant (pulsed)}$



SEMTECH ELECTRONICS LTD.
 (Subsidiary of Sino-Tech International Holdings Limited, a company
 listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
 Certificate No. 05103



ISO 14001:2004
 Certificate No. 71116



ISO 9001:2000
 Certificate No. 0506098

Dated : 20/09/2005

ZMM 1...ZMM200



SEMTECH ELECTRONICS LTD.
 (Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
 Certificate No. 05103








ISO 14001:2004
 Certificate No. 7116



ISO 9001:2000
 Certificate No. 0506098

Dated : 20/09/2005

ZMM 1...ZMM200

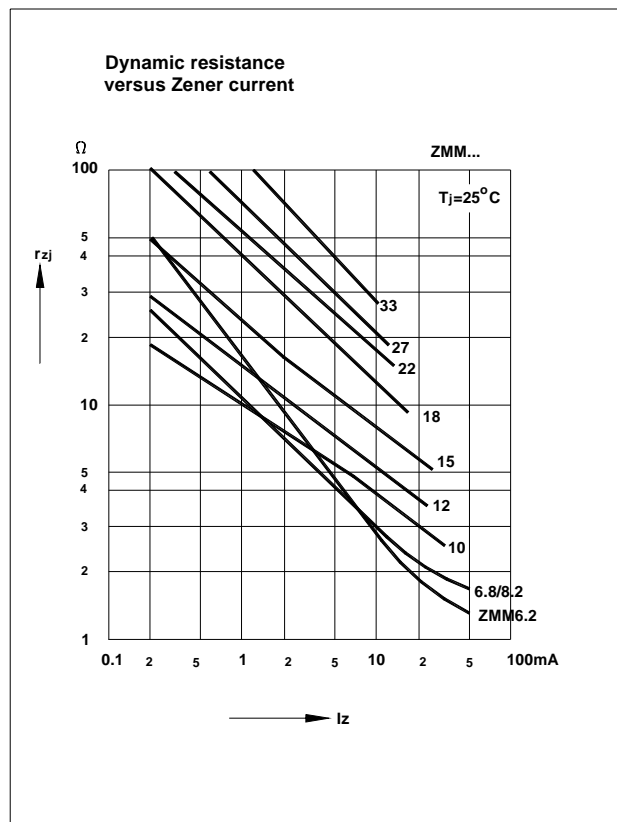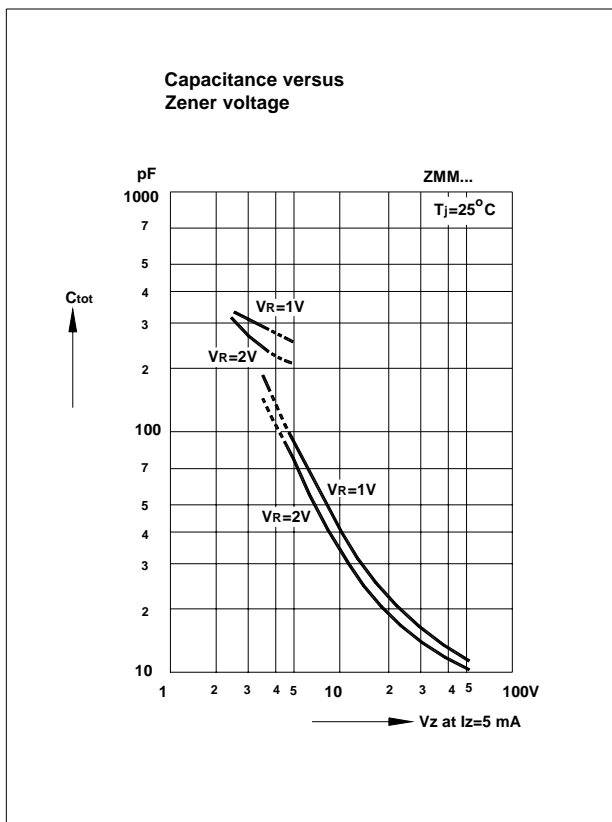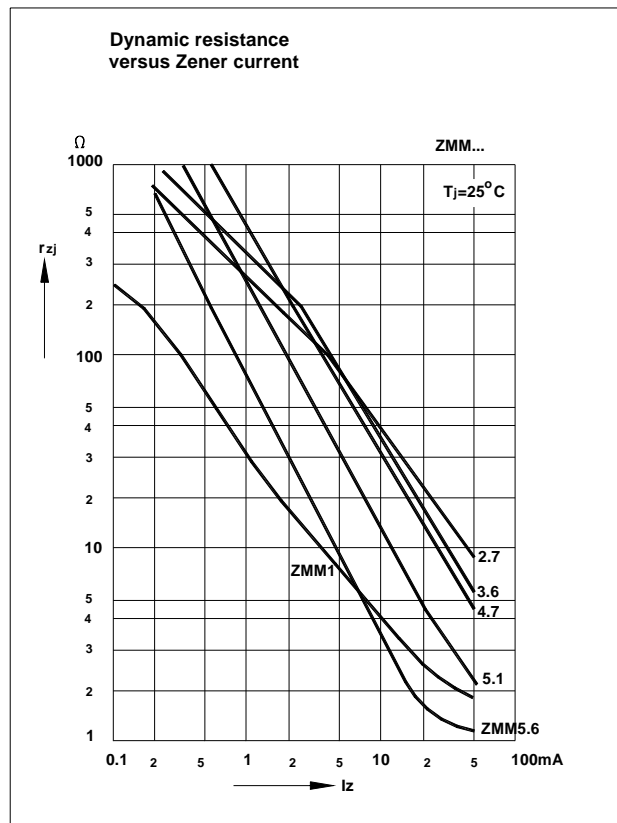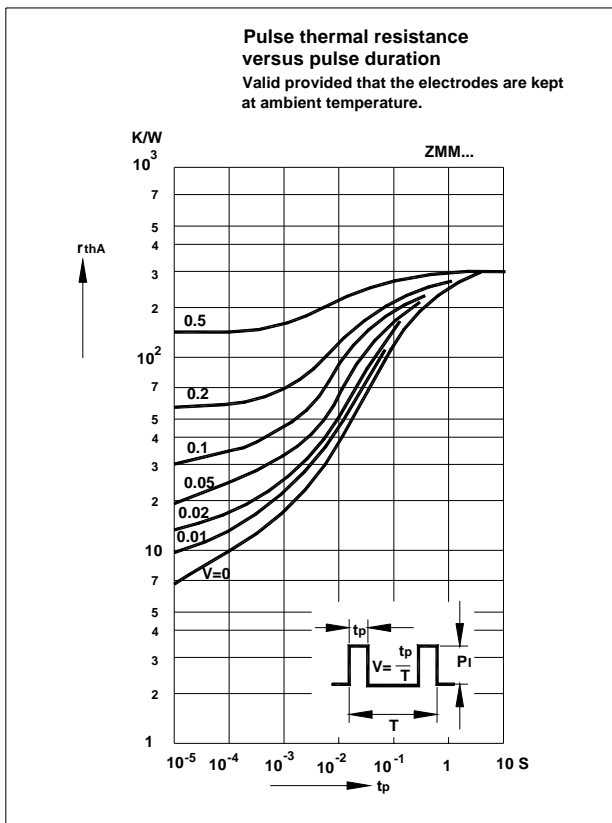

SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103







ISO 14001:2004
Certificate No. 71116



ISO 9001:2000
Certificate No. 0506098

Dated : 20/09/2005

ZMM 1...ZMM200

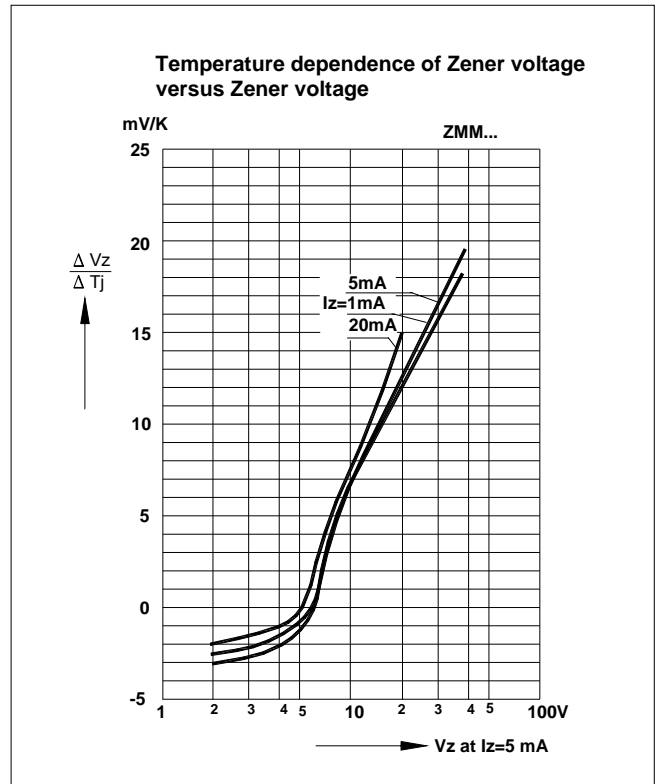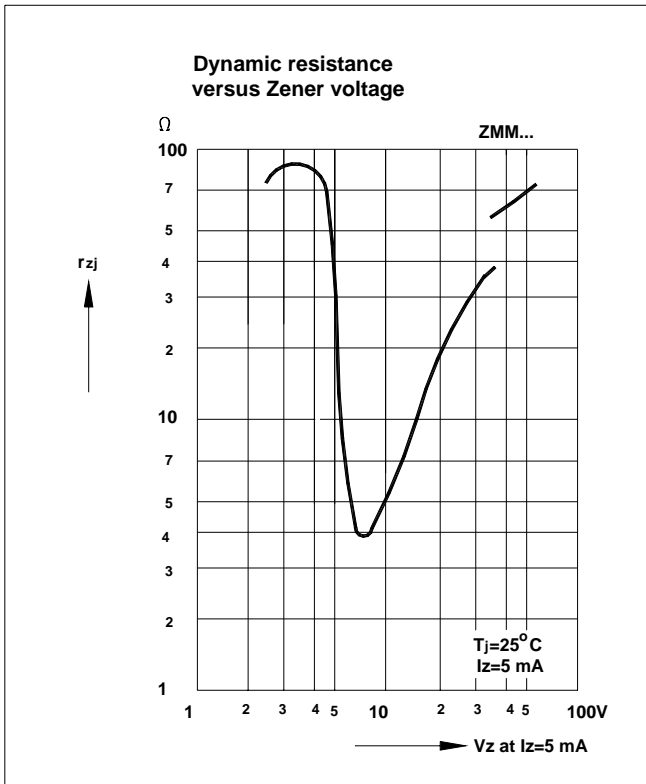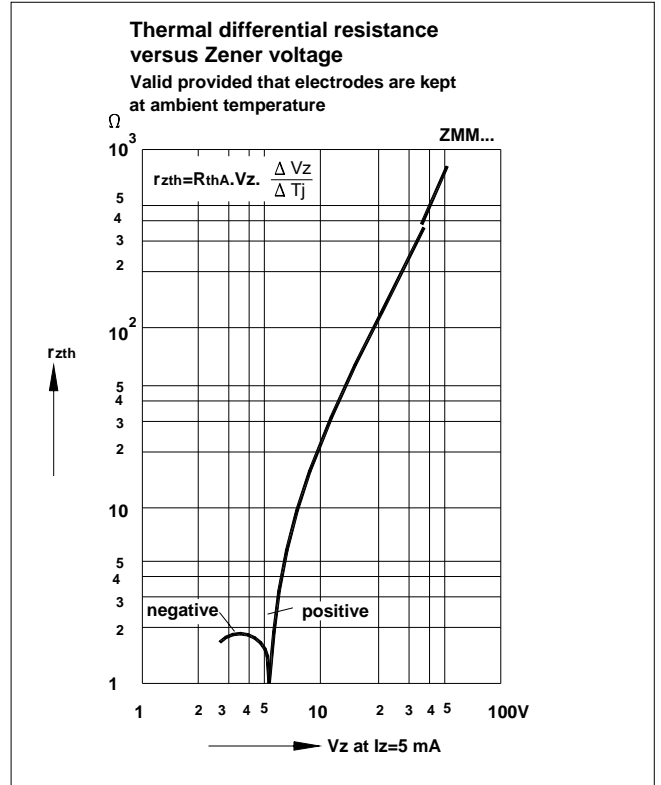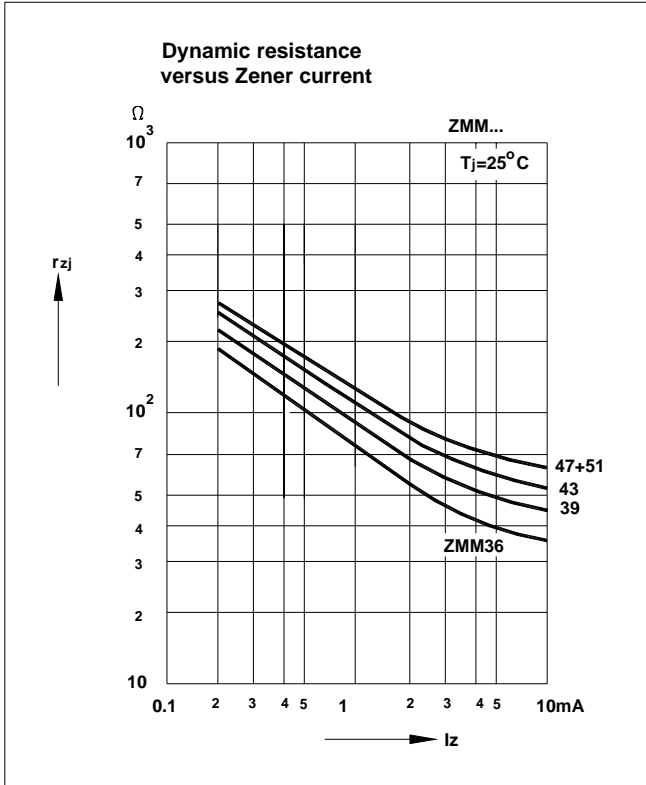

SEMTECH ELECTRONICS LTD.
 (Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)








ISO/TS 16949 : 2002
 Certificate No. 05103

ISO 14001:2004
 Certificate No. 71116

ISO 9001:2000
 Certificate No. 0506098

Dated : 20/09/2005

ZMM 1...ZMM200

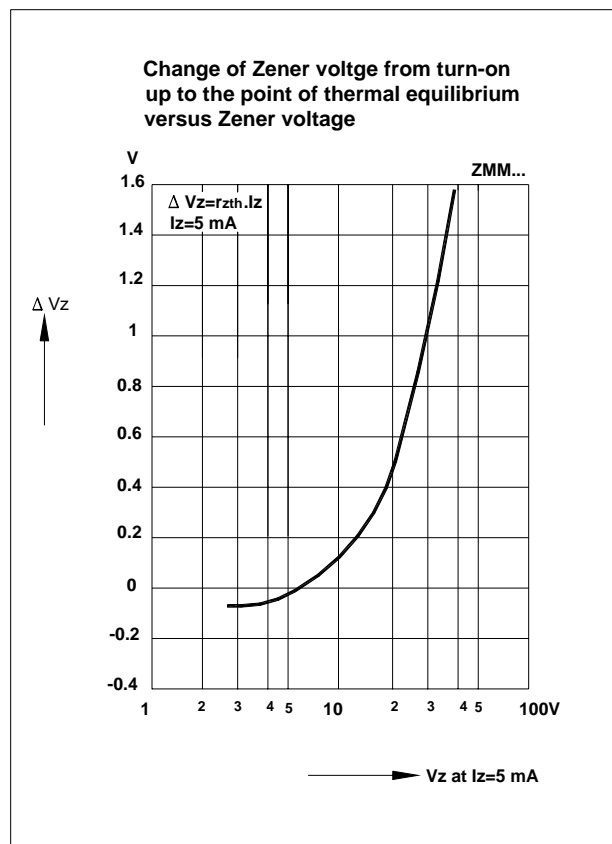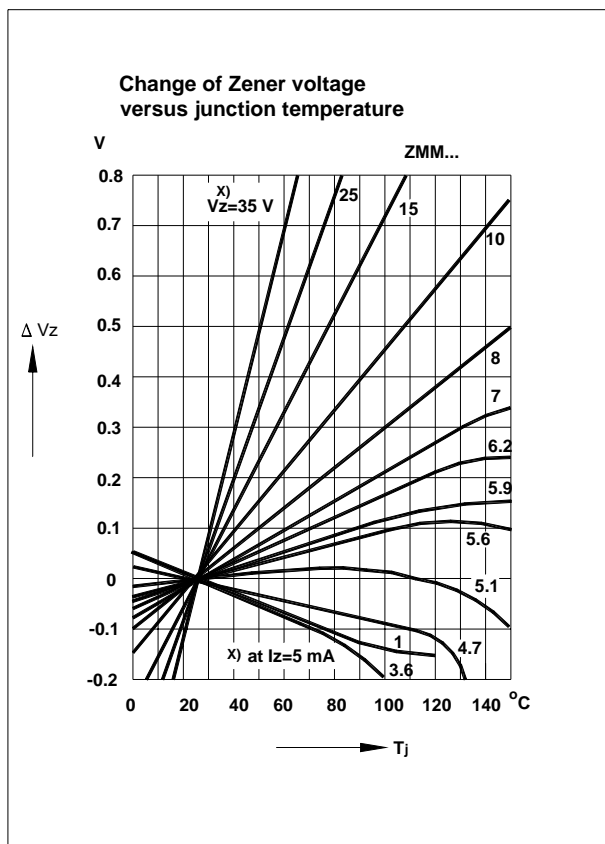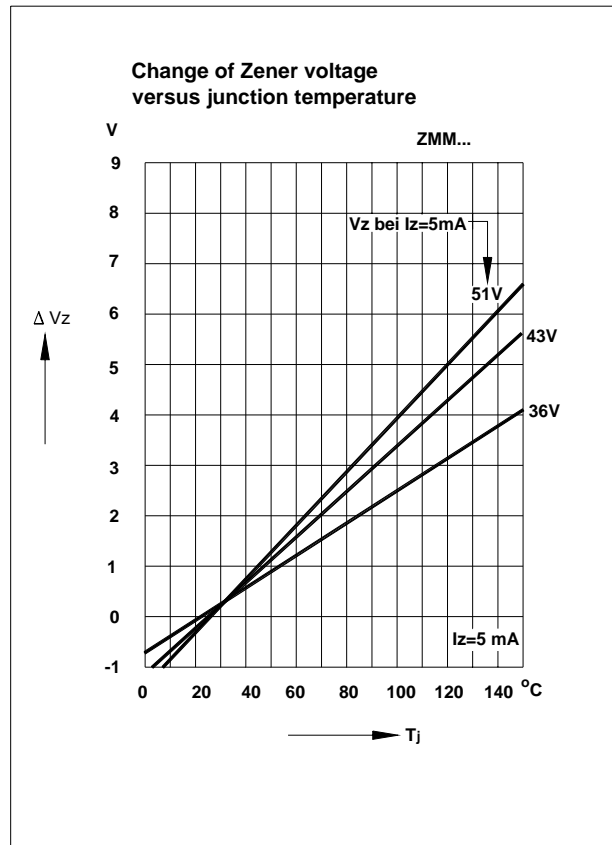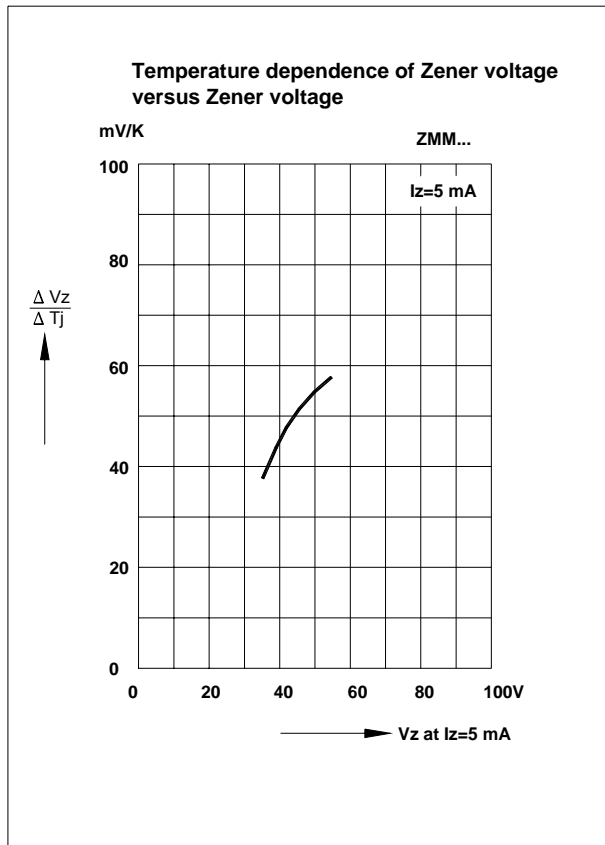

SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103




ISO 14001:2004
Certificate No. 7116




ISO 9001:2000
Certificate No. 0506098

Dated : 20/09/2005

ZMM 1...ZMM200

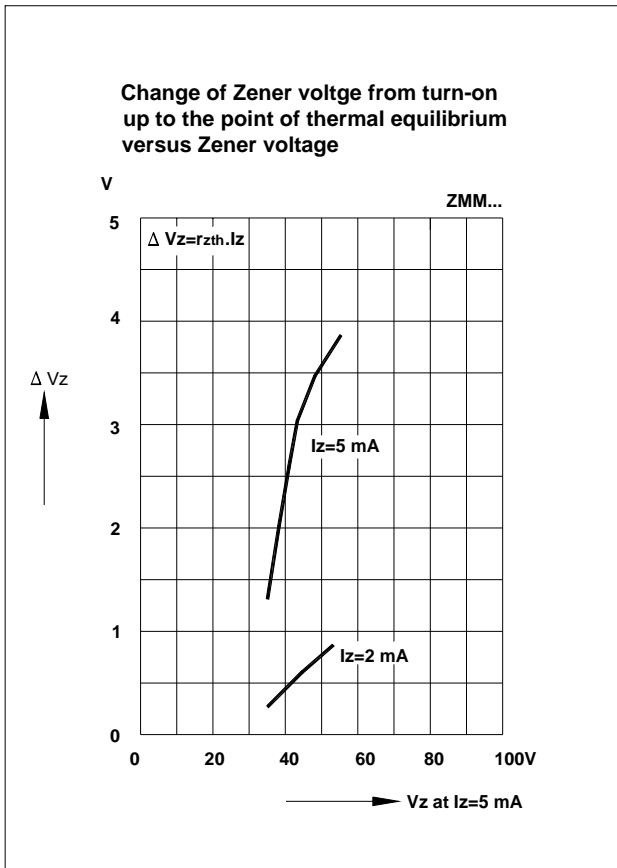

SEMTECH ELECTRONICS LTD.
 (Subsidiary of Sino-Tech International Holdings Limited, a company
 listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
 Certificate No. 05103

ISO 14001:2004
 Certificate No. 71116

ISO 9001:2000
 Certificate No. 0506098

Dated : 20/09/2005

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Zener Diodes](#) category:

Click to view products by [Semtech](#) manufacturer:

Other Similar products are found below :

[RKZ13B2KG#P1](#) [DL5234B](#) [1N4682](#) [1N4693](#) [1N4732A](#) [1N4736A](#) [1N4750A](#) [1N4759ARL](#) [1N5241B](#) [1N5365B](#) [1N5369B](#) [1N747A](#)
[1N964B](#) [1N966B](#) [1N968B](#) [1N972B](#) [JANS1N4974US](#) [1N4692](#) [1N4702](#) [1N4704](#) [1N4711](#) [1N4714](#) [1N4745ARL](#) [1N4752ARL](#) [1N4760ARL](#)
[1N5221B](#) [1N5242BTR](#) [1N5350B](#) [1N5352B](#) [1N961BRR1](#) [1N964BRL](#) [RKZ5.1BKU#P6](#) [3SMAJ5946B-TP](#) [3SMAJ5950B-TP](#)
[MMSZ5230BQ-13-F](#) [MMSZ5232BQ-13-F](#) [BZX84C7V5](#) [3SMAJ5945B-TP](#) [3SMAJ5947B-TP](#) [3SMBJ5941B-TP](#) [DZ2S240M0L](#) [SMAZ27-](#)
[TP](#) [ZMM5224B-7](#) [RD16UM-T1-A](#) [RD39S-T1-A](#) [RD10S-T1-A](#) [CDZT2R5.6B](#) [1N4762A G](#) [Z1SMA18](#) [JANTX1N4553B](#)