



BUSHING MOUNT/SLEEVE BEARING MODEL 4205, 4206


7/8" TO 1-3/4" DIAMETER BUSHING MOUNT

HYBRID 3, 5 AND 10-TURN PRECISION POTENTIOMETERS

BUSHING MODEL	4205/4206
ELECTRICAL	
Theoretical Electrical Travel	1080°
Normal Resistance Range	750 Ω to 25K
Extended Resistance Range ⁽¹⁾	500 Ω to 30K
Resistance Tolerance: Standard %	± 5
Best Practical %	± 3
Power Rating At 70°C, Derating To 0 at 125°C (Watts)	1.5
Linearity, Independent, Tolerance, Standard %	± 0.5
Best Practical %	± 0.15
Output Smoothness Max. (% Of Applied Voltage)	0.5
End Voltage Max. (% Of Total Applied Voltage)	0.25
Insulation Resistance At 500 VDC, Min. (Megohms)	1000
Dielectric Withstanding Voltage (Volts RMS)	1000
Max. Applied Voltage (Volts DC) ⁽²⁾	1000
Temperature Coefficient Of Potentiometer, Max. %/°C	± .007
Tap Spacing Minimum	30°
MECHANICAL	
Total Mechanical Travel	1080° + 10° - 0°
Mechanical Life, Shaft Revolutions	2 million
Ganged Cups, Max. (Number)	3
Taps, Max., Excluding End Terminations	10
Moment Of Inertia, Per Cup (gm-cm ²)	0.25
Weight: Single Cup (oz.)	0.9
Each Additional Cup (oz.)	0.7
Torque, Max. Per Cup (oz.-in)	0.5
Pilot Diameter Runout, Max.	.0015
Lateral Runout, Max.	.003
Shaft Runout, Max.	.001
Shaft Radial Play, Max.	.003
Shaft End Play, Max.	.005
Dimension For Each Additional Cup	.823 ± .002
Stop Strength Static (oz.-in)	128
ENVIRONMENTAL	
Temperature Range (°C) Standard	-55 to +125

(1) All specifications listed apply to units with a total resistance within the normal resistance range. Higher or lower resistances may require some degradation of listed specifications because of resistance material composition.

(2) Not to exceed specified power rating.





ALL MODELS are manufactured to meet or exceed applicable characteristics of MIL-R-39023. For MILITARY-APPROVED (QPL) Listings, see page 52.

TOLERANCES UNLESS OTHERWISE SPECIFIED:

FRACTIONAL: ± 1/64" DECIMAL: ± .005" ANGULAR: ± 1°

LENGTHS		
MODEL	NUMBER OF TURNS	LENGTH DIMENSION L
4205	3	.960 ± .006
4206		.960 ± .006
4605		1.148 ± .007
4705		1.148 ± .007
4208	5	1.103 ± .006
4209		1.103 ± .006
4202	10	1.460 ± .006
4203		1.460 ± .006
4232		1.460 ± .006
4233		1.460 ± .006
4602		1.925 ± .007
4702		1.925 ± .007

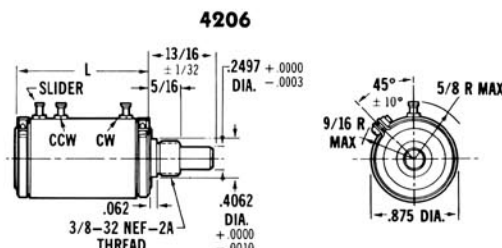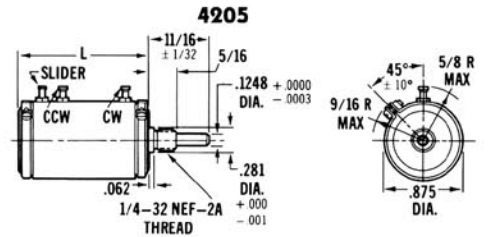

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Precision Potentiometers](#) category:

Click to view products by [SENSATA](#) manufacturer:

Other Similar products are found below :

[578002M9648](#) [70J1G032S202A](#) [176FL1-284](#) [F78SB102-M257](#) [3548H-1AA-103B](#) [485025M9267](#) [MH12B-10L-10K](#) [578005M9656](#)
[72N4N048S203W](#) [RO200SF1C103](#) [114BF2A102-L774](#) [200FL1-199](#) [78FL1-397](#) [78MKV-128](#) [501-0004](#) [501-0018](#) [SE15303-352-T4](#)
[284TCBF103A26A1](#) [RO34SF1B502](#) [200FL1-260](#) [3548H-1AB-502A](#) [157-0237](#) [284TBBK103A26B1](#) [DC22-10-100](#) [JC22S 1K 0.5%](#)
[MW22B-2200-500](#) [122S1501](#) [RCL-100](#) [RCL-200](#) [3590P-4-503L](#) [380C2750K](#) [157S202MB9002](#) [157S102MB9002](#) [15A31B10](#) [380C2500K](#)
[SP22E-100K](#) [AR300KL.25](#) [AR2KL.25](#) [AR1KL.25](#) [AR500KL.25](#) [MC6CX1A502X001](#) [7286R100L.25](#) [7286R20KL.25](#) [73JB100<](#) [6638S-1-](#)
[103](#) [282TCBS103A25B1](#) [3590P-1-103L](#) [7276R2KL.25](#) [3500S-2-500L](#) [SP22D-1K](#)