CW1



Counterweight for use on cable suspended float switches.



- Adjustable cable pivot point
- Cable lock feature
- Inert and non-hazardous in water

This counterweight is used to set or adjust the pivot point for a cable suspended float switch. The position on the cable relative to the switch can be used to adjust the liquid level differential between open and closed switch output.

Most of the cable suspended float switches from Cynergy3 are supplied with these counterweights but the LITTLE-EX series of ATEX approved switches are not.


Installation of counterweight on cable

Remove the locking cone from the top of the counterweight moulding, but DO NOT REMOVE THE LID OF THE COUNTERWEIGHT.

Fit the locking cone onto the cable

Feed the cable through the counterweight body until the locking cone reaches the counterweight.

Push the locking cone into the base of the counterweight to lock the counterweight on the cable at the required position.

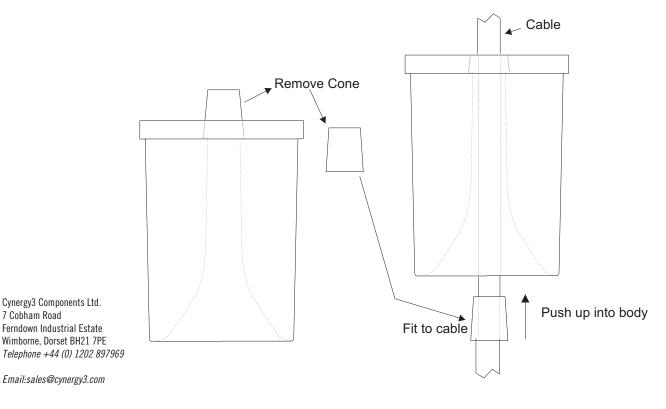

ISO9001 CERTIFIED

www.cynergy3.com

© 2012 Cynergy3 Components, All Rights Reserved. Specifications are subject to change without prior notice. Cynergy3 Components and the Cynergy3 Components logo are trademarks of Cynergy3 Components Limited.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Sensor Fixings & Accessories category:

Click to view products by Sensata manufacturer:

Other Similar products are found below :

 F03-01 SUS304 BINIL
 8000-5130
 FH-AP1
 PH-1-10M
 PH-1-20M
 PH-2-30M
 AC201
 R4
 ADI-LC3S
 E39-L149
 EC18-WELL
 PC-15015

 K35-4
 A-1923
 SS-12143
 STA12
 AP4-T
 PH-1-50M
 R6
 D01051301
 43912557-020
 MF-1
 D=3.2
 BGN-035
 E39-L7
 ZX-SB11
 D01070602

 606072
 606075
 Y92ES12PVC4A10ML
 Y92ES12PVC4S5ML
 SA9Z-F11
 Z49-SF1
 ZFV-XMF2
 E4R-R12A-CS3M010
 ZX-SW11E
 V3

 CCS-PL-LDR2-70
 E4R-R12A-CS3M020
 BS-1T CHITAN
 F03-01 CHITAN
 CCS-PD2-1012
 PH-2-90M
 PH-2-5M
 XMLZL008
 AC244

 28810-1
 PH-1-40M
 SS-12225
 32043-500
 81532111
 PH-2-60M