LM Series



This is suitable for use in water, industrial wastewater and sewage, that can have wide variations of temperature. This small design of switch is for use in more confined spaces, where there is not enough room for the larger FFSMC type.

The rounded body design and floating attitude prevents accumulation of solids on the body. The switch has additional internal ballast, to bring the centre of gravity and rotation close to the cable entry point.


The switching element is a self cleaning type, that makes the complete switch insensitive to humidity and condensation, allowing this type to operate in widely fluctuating temperatures. The switch contacts are rated at 10 Amp resistive.

Supplied, as standard, with 5 metres cable and adjustable counterweight.

Technical Specifications	LM10A	LM10B	LM10C	
Contact Form	N/O	N/C	C/O	
Material	High Density Polyethylene			
Temp Range °C	0 / +55			
°F	+ 32 / +131			
Cable (standard length 5m)	With protective earth no earth		no earth	
Standard cable covering	PVC			
U cable option for Fuel oils	Polyurethane			
Max. working pressure	10 bar			
Electrical Specifications				
Power Rating Max	AC : 750 VA DC : 180W			
Switching Voltage Max	AC : 250 V DC : 110 V			
Switching Current Max. Resistive	10 A			
Switching Current Max. Inductive	AC : 4A DC : 1 A			

It is necessary to use an auxiliary relay, when switching pump motors or any loads that are not purely resistive.

MECHANICAL

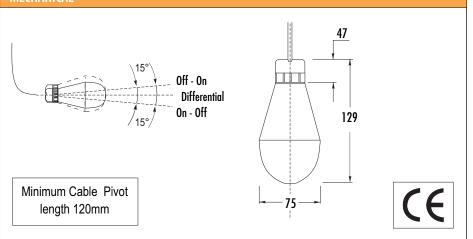

- For smaller tanks and restricted space
- Use in sewer and industrial waste water
- Shape avoids "ragging", in sewer systems
- Unaffected by suspended solids
- Operates in Turbulent Fluids

Cynergy3 Components Ltd 7 Cobham Road Ferndown Industrial Estate Wimborne Dorset BH21 7PE Tel: +44 (0) 1202 897969

sales@cynergy3.com

ISO 9001CERTIFIED

www.cynergy3.com © 2011 Cynergy3 Components, All Rights Reserved. Specifications are subject to change without prior notice. Cynergy3 Components and the Cynergy3 Components logo are trademarks of Cynergy3 Components Limited.


LM Series



Part Numbering System

	LM 10 A U 10	
Series Max. current		Cable length in mtrs: Blank = 5M standard
Contact Form		Cable covering:
A = n/o		Blank = PVC U = Polyurethane
B = n/c C = c/o		N = Neoprene
U – C/O		S = Silicone

Installation

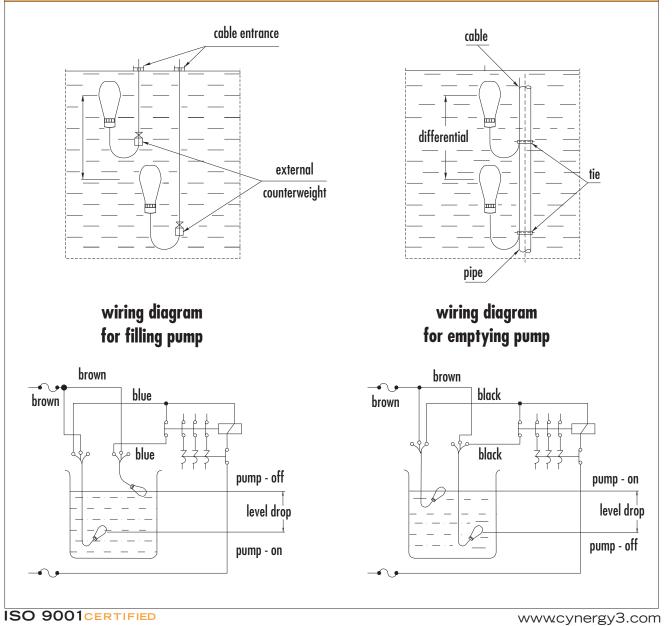

© 2011 Cynergy3 Components, All Rights Reserved. Specifications are subject to change without prior notice. Cynergy3 Components and the Cynergy3 Components logo are trademarks of Cynergy3 Components Limited.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Liquid Level Sensors category:

Click to view products by Sensata manufacturer:

Other Similar products are found below :

 FSH-21
 FSH-34
 FSH-35
 FSV-31
 FSV-35
 RSF54H100R1/8
 LRNH31S41
 F03-16SFC-10M
 F03-16PE-5M
 F03-16PT-5M
 SCN

 1518SC
 LL103000
 LRNR31N01
 F03-16PT-2M
 MS03-PP
 F03-16SF-10M
 KSL-100-1
 LS01-1A66-PP-2000W
 LS01-1B66-PP-500W
 LS02

 1B66-S-500W
 LS02-1B85-PP-500W
 LS03-1A85-PP-500W
 LS03/DL-1A85-PA-500W
 EL-10N
 EL-3N
 LL01-1AA01
 59630-1-T-02-F

 LS04-1B66-2-500W
 LFFS 011
 PS-3S (Q)
 T0-SKF-0.5
 T0-SKF-5
 VNI3
 CLE2P
 VNI1
 LBFS 0111
 LFFS 014
 KSL-35-PP

 KSL-88-PP
 KSL-99-1
 LS02-1A85-PP-500W
 LS02-1B85-PP-500W
 LS03-1A85-PA-500W
 MIC 1000-20
 700670
 BAF147B002-00A0
 DFT-110

 DFT-220
 DFT-220
 DFT-220
 DFT-220
 DFT-200
 DFT-200
 DFT-200
 DFT-200
 DFT-200