

SC-ISOSLICE-9

ISOLATED BUS I/O MODULE



- 4 off AC Current Inputs
- Communicates to Ethernet / RS232 or RS485 network via an SC-E-100 unit
- Input/Output/Power Supply Isolation
- Automatic Bus & Power Connection Via DIN Rail Bus Connector
- Multiple inputs in one module
- Very High Accuracy, Low Cost

The SC-ISOSLICE-9 isolated Bus I/O module combines full three-port isolation with access to an industrial bus. This bus connects to the SC-E-100 modules which are then used to transmit the process values via either an Ethernet or a RS232/485 wired communications network.

Full 3-port isolation is standard.

The SC-ISOSLICE-9 is designed to accept current inputs from Current Transformers with current outputs.

Non-interactive zero and span controls make adjustment and calibration of the unit quick and simple.

The units have a wide ranging 12 to 36 Vdc. This supply can either be wired to the appropriate terminals or picked up automatically from the Bus connector.

Input Types for SC-ISOSLICE-9

AC Current
AC Current ranges
0-1Aac

Outputs

For Output Modules see SC-ISOSLICE-6 or SC-ISOSLICE-8

Min & Max Full Scale Ranges are:

DC Current	0-100mA	0 – 1A
AC Current	0-100mA	0 - 1A

Technical Specifications

Parameter	Min	Typ	Max	Comments
Supply Voltage	12V	24V	36Vdc	
Supply Current (mA)		45	90	For 24Vdc supply (260mA for 50ms on start-up)
Bus Connection				16-bit bus connection
Volt Drop		0.3		At 5A ac Input
Input Impedance (A)		0.2Ω		Dependant on range (typ=0-1A)
Temp Coefficient				±50ppm/°C
Time Constant (10-90%)		200mS		
Operating Ambient	0°C		55°C	
Relative Humidity	0%		90%	
Isolation Voltage ^{see note}	1kV			
Surge Voltage	2.5kV for 50μS		Transient of 10kV/μS	

Notes


Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. Device is protected against reverse polarity connection. Accuracy figures based on 24Vdc supply, 4-20mA output with 250Ω load and an ambient 20°C.

Installation Data

Mounting	DIN Rail TS35
Orientation	Any
Connections	Screw Clamp with pressure plate
Conductor Size	0.5-4.0mm
Insulation Stripping	12mm
Weight	Approx 95g

Ordering Information

Part No.: SC-ISOSLICE-9

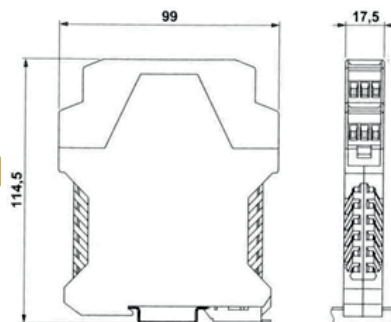

Part Number	Universal Inputs	mA or V Inputs	RTD Inputs	T/C Inputs	Analogue Outputs	Digital Inputs	Digital Outputs
SC-ISOSLICE-1	2						
SC-ISOSLICE-2		8					
SC-ISOSLICE-3			4				
SC-ISOSLICE-4				4			
SC-ISOSLICE-5						8	
SC-ISOSLICE-6							4
SC-ISOSLICE-7						2 x freq in	
SC-ISOSLICE-8					4		
SC-ISOSLICE-9	4 x AC I/V						

Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE
Telephone +44 (0) 1202 897969
Email:sales@cynergy3.com

ISO9001CERTIFIED

SC-ISOSLICE-9 2017



Made in the UK

www.cynergy3.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Modules](#) category:

Click to view products by [Sensata](#) manufacturer:

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [OACU](#) [C4SWOUT](#) [PB16H](#) [G34960001700](#) [G3TA-OA101SZ-1](#) [DC24](#) [G77-S](#) [5607189](#) [DA5](#) [ODC-24A](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [70MRCQ32-HL](#) [G3TAOD201SDC24](#) [C200H-LK201-V1](#)
[G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [B7AM-6BS](#) [70GRCQ24-HS](#) [6422](#) [84110410](#) [GT1-OD16MX](#) [G7VC-OC16-B7](#)
[70MRCK24-DIN](#) [6202](#) [6402](#) [PI/NI-2D/24](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-R081](#) [FC6A-J8CU1](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#)
[84145010](#) [84110210](#) [FRUSB1601](#) [PCL-720+-BE](#) [FRRJ451601](#) [AP24MX3DB25F](#) [ADAM-5053S-AE](#) [WISE-S614-A](#) [C200H-OD211](#)