



深圳市深宏电子有限公司

SHENZHEN SHENHONG OPTOELECTRONICS CO; LTD

# 承认书

## SPECIFICATION FOR APPROVAL

客户名称 Customer name: 深圳市立创电子商务有限公司

产品名称 Product name: 3MM 接收管 940

产品型号 The product model : 91121002

样品编号 Sample Numbers: \_\_\_\_\_

客户编号 Customer Numbers: \_\_\_\_\_

日期 Date: 2023-4-26

| 深圳市深宏电子有限公司<br>SHENZHEN SHENHONG OPTO ELECTRONICS CO; LTD |                         |                       |
|---|-------------------------|-----------------------|
| 品质部<br>Quality Dept                                       | 工程部<br>Engineering Dept | 市场部<br>Marketing Dept |
|   |                         |                       |

说明:

致执事者: 兹提供敝公司产品之有关详细规格及图面资料, 敬请给予办理测试确定, 同时敬请送返一份有贵司签认之测试确认后样品确认书。

| 客户确认签名<br>Customers confirmation signature |  |                     |  |
|--|--|---------------------|--|
| 工程部<br>Engineering Dept                    |  | 品质部<br>Quality Dept |  |

地址:

广东省深圳市宝安区松岗街道朗下社区沙江路 314 号稳丰工业园 A 栋 3 楼  
3rd Floor, Building A, Wenfeng Industrial Park, No. 314 Shajiang Road, Langxia  
Community, Songgang Street, Bao'an District, Shenzhen City, Guangdong Province  
电话 (Tel) : 0755-81766501/29719689/29719996 传真 (Fax) : 0755-81766538

Http://www.ledshenhong.com


E-mail:shenhongled@126.com

# Production Specification (生产规格)

**型号 Model:**

**91121002**

## Outline Dimensions(外形尺寸)

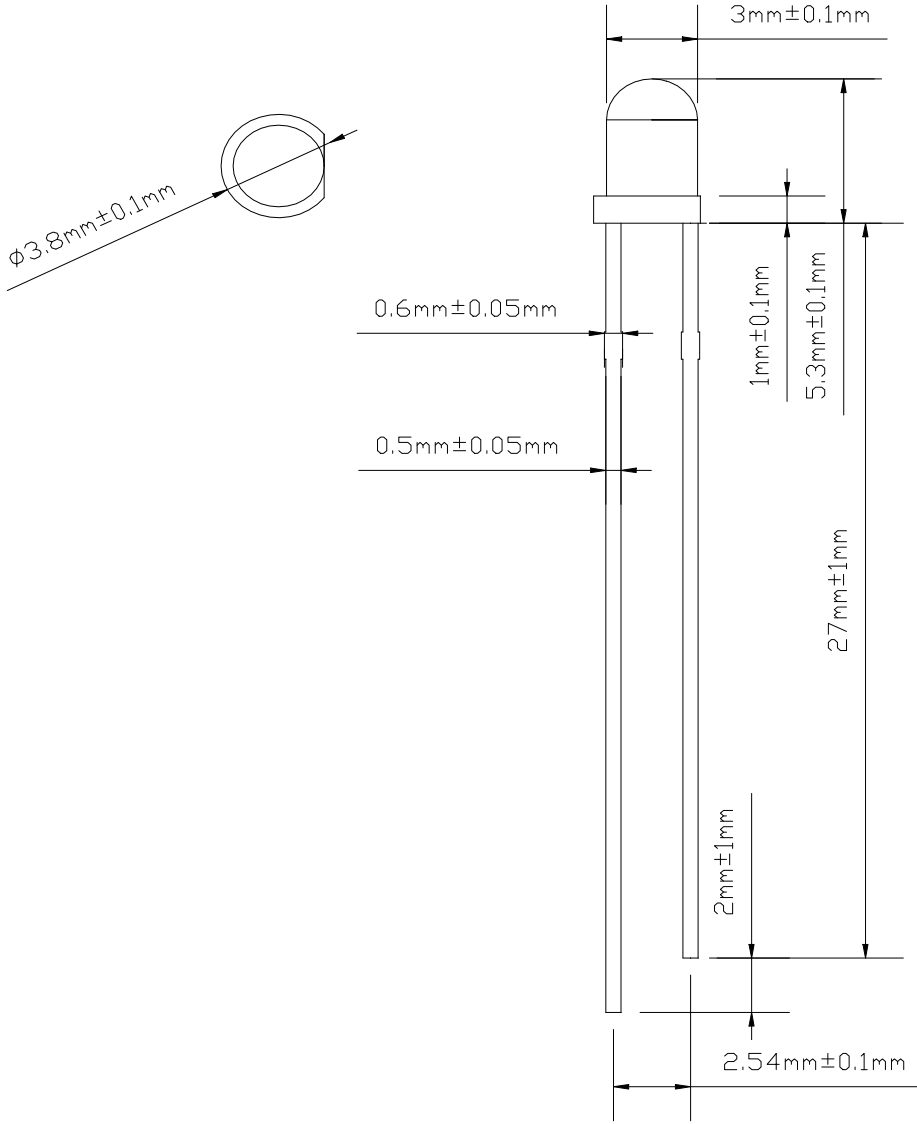

| 单位<br>Units | 图面未注公差<br>Encapsulation Tolerance | 胶体外观公差<br>Encapsulation tolerance | 胶体伸出尺寸(NOTE)<br>Dimensions of protruded flange |
|-------------|-----------------------------------|-----------------------------------|--|
| mm          | $\pm 0.25$                        |                                   |  |

※备注：承认书编号和型号可用于查询，客户如有需要，请提供相应的编号和型号名。

Remark: P/N & Model in samples approval sheet can be used to inquire, please provide corresponding

P/N & Model if customer need.

**Absolute Maximum Ratings at TA=25oC(在25oC环境下之最大绝对额定值)**

| Parameter(参数)                         | Symbo(符号)    | Maximum Rating(最大值) | Units(单位) |
|---------------------------------------|--------------|---------------------|-----------|
| Power dissipation(功率消耗)               | PD           | 100                 | mW        |
| Reverse Breakdown Voltage<br>(反向击穿电压) | <b>V(BR)</b> | 60                  | V         |
| Reverse Voltage(反向电压)                 | VR           | 5 V                 |           |
| Operating Temperature(操作温度)           | Topr         | -40oC To +80oC      |           |
| Storage Temperature(贮藏温度)             | Tstg         | -40oC To +80oC      |           |
| Lead Solder Temperature(2)(焊接温度)      | Tsol         | 260oC for 3 seconds |           |

**Electrical / Optical Characteristics at TA=25oC(25oC环境下之电性/光学特性)**

| Parameter(参数)                          | Symbo<br>l<br>(符号) | Min.<br>(最小<br>值) | Typ.<br>(规格<br>值) | Max.<br>(最大<br>值) | Units<br>(单位) | TestConditions<br>(测试条件)                 |
|--|--------------------|-------------------|-------------------|-------------------|---------------|--|
| Reverse Breakdown Voltage<br>(反向击穿电压)  | V(BR)              | 35                | --                | --                | V             | IR=100uA, Ee=0mW/<br>cm <sup>2</sup>     |
| <b>Reverse Dark Current</b><br>(反向暗电流) | ID                 | --                | 2                 | 10                | nA            | VR=10V, Ee=0mW/c<br>m <sup>2</sup>       |
| Reverse Light Current<br>(光电流)         | IL                 | --                | 11                | --                | uA            | VR=5V, λ=940nm<br>Ee=1mW/cm <sup>2</sup> |
| Peak Sensing Wavelength<br>(峰值波长)      | λ p                | --                | 940               | --                | nm            |  |
| <b>Rise Time</b> (起动时间)                | Tr                 | --                | 20                | --                | nS            | VR=20V, λ=940nm<br>RL=50 Ω               |
| <b>Fall Time</b> (结束时间)                | Tf                 | --                | 20                | --                | nS            | VR=20V, λ=940nm<br>RL=50 Ω               |
| <b>Forward Voltage</b><br>(正向电压)       | VF                 | 0.5               | --                | 1.3               | V             | IF=1mA                                   |
| Total Capacitance<br>(总电容量)            | CT                 | --                | 14                | --                | PF            | VR=5V, f=1MHZ<br>Ee=0 mW/cm <sup>2</sup> |
| Viewing Angle(角度)                      | 2 θ<br>1/2         | --                | 45                | --                | deg           |  |

Note:

- (1).1/10 Duty Cycle, 0.1ms Pulse Width.  
(1/10周期, 0.1ms脉宽)
- (2).3mm below package base.  
(在胶体3毫米以下焊接)
- (3).The production accord with the demand of ROHS.  
(此产品符合ROHS要求.)

# 特性曲线图

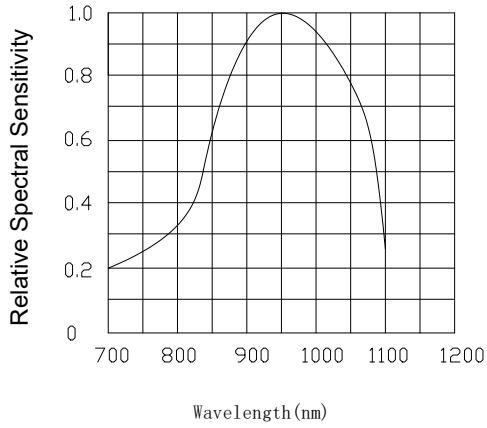


FIG.1 Relative Spectral Sensitivity vs. Wavelength

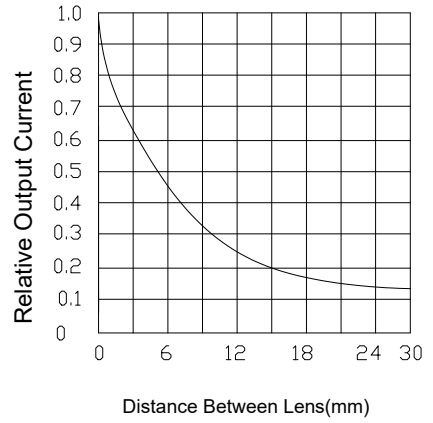


FIG.2 Coupling Characteristics

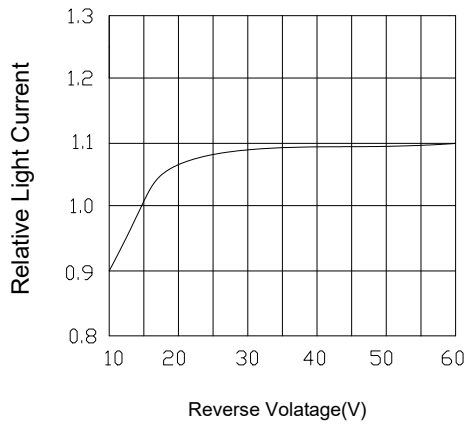


FIG.3 Vr vs Relative IL

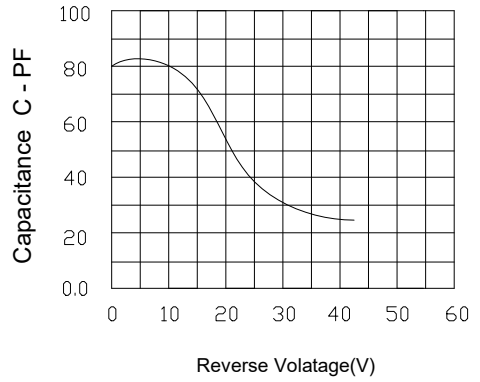


FIG.4 VR vs CT

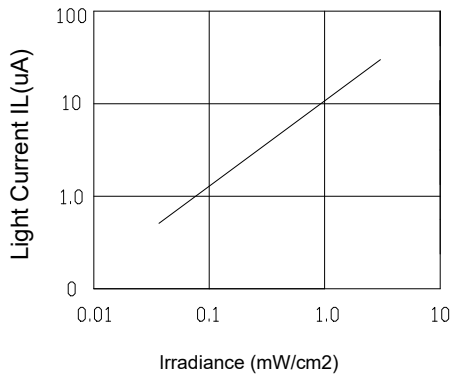


FIG.5 IL vs Iv

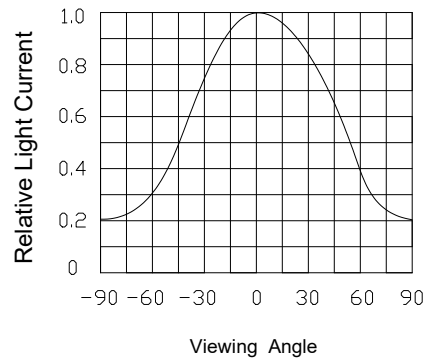


FIG.6 Angle VS Relative IL

## §注意事项 Note

### (一)引脚成形方式 (LED bracket forming method)

(1) 必须离胶体 2 毫米才能折弯支架

The pin of LED can be bent where is at 2mm out of LED colloid .

(2) 支架成形必须用夹具或由专业人员来完成

Must use fixture to deform the LED bracket.

(3) 支架成形必须在焊接前完成

Finishing the forming of LED bracket must be before soldering.

(4) 支架成形需保证引脚的间距与线路板一致

Guarantee the gap between two pin of LED tallys with LED pads in PCB when forming.

### (二)烙铁焊接(Manual soldering)

烙铁（最高 30W）尖端温度不能超过 300℃；焊接时间不能超过 3 秒；焊枪位置至少离胶体 3 毫米。

The tip temperature of soldering iron don't exceed 300℃ ; soldering time don't exceed 3s and soldering position must be 3mm out of LED colloid.

### (三)防静电措施(ESD countermeasure)

静电及高压会对 LED 造成损坏,特别是芯片材质为 InGaN 的产品对静电防护要求更加严格,要求在使用和检验产品时戴防护静电手腕带或静电手套,焊接工具及设备外壳需可靠接地,焊接条件遵循此份规格书中的条件。

Static electricity and high volt can damage LED,The production whose die material is InGaN must strictly required to prevent ESD, Must put on static glove and static fillet ,soldering tool and the cover of device must connect the ground ,soldering condition follows the related of production specification manual.

### (四)过电流保护(Protecting countermeasure when over current)

为避免由于电压的变化引起大电流冲击而造成产品损坏,需要加入保护电阻。

Need add the protecting resistor in circuit in order to avoid damaging LED due to big current and voltage fluctuation.

### (五)LED 安装方法(LED installation method)

1) 注意各类器件外线的排列以防性能装错,器件不可与发热元件靠得太近,工作条件不要超过其规定的极限。

Pay attention to the LED polarity and avoid installation wrong .LED close to eutermic component work condition should with it' s specification.

2) 务必不要在引脚间距变形的情况下安装 LED

Don't install the LED undet the condition of the LED pin deformation

3) 当装配 LED 进入 PCB 或装配孔时,LED 支架不能承受任何压力

The LED bracket don't load any pressure when installing the LED PCB or fitting hole.

4) 在焊接温度回到正常以前,必须避免使 LED 受到任何的震动或外力

Must avoid any strike and force on LED before the soldering temperature return to room temperature return to room temperature.

## **(六)存储时间(Storage time)**

1) 在温度 5°C~35°C, 湿度 RH60%条件下, 产品可保存一年, 超过保存期的产品需重新检测后方能使用。

LED can be stored for a year under the condition:the temperature of 5°C~35°C,and humidity

Of RH60%, these production must be re - inspected and tested before use if their storage time exceed a year.

2) 如果打开的产品在 5°C~35°C, RH60%的空气条件下放置一周, 则需要将产品在 65°C±5°C 的环境中放置 24 小时以上, 并尽量在十五天内使用。

If LED is exposed in air for a week under the condition:the temperature of 5°C~35°C, humidity

Of RH60%, must place the LED in the ambience of 65°C±5°C for 24 hours use it in 15 days for best.

## **(七)清洗(Cleaning)**

当用化学用品清洗胶体时必须特别小心, 因为有些化学对胶体表面有损伤并引起退色如三氯乙烯、丙酮等。可用乙醇擦拭、浸渍, 时间在常温下不能超过 3 分钟。

Be careful of some chemical results in the LED colloid fades and damage when using chemical the LED, such as

Chloroethylene ,acetone etc. can use ethanol to wash or soak LED but the time don't exceed 3 minutes.

## **(八)弯脚 (Kinked)**

当 LED 成形弯脚时, 弯脚模具容易刮花 LED 脚支架镀层, 刮伤处容易生锈, 特别是空气湿度大时, 为减少生锈机会, 建议使用镀锡支架。

The kinked tooling scrape easily the pin of LED , where the LED bracket is rusting easily ,especial it in moist air.

To decrease the LED bracket rust ,advise using plated tin LED bracket

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [shenhong manufacturer](#):*

Other Similar products are found below :

[91139003](#) [91153002](#) [91183001](#) [91107016](#) [91053001](#) [91102017](#) [91008002](#) [910A7001](#) [91107005](#) [92002010](#) [91111001](#) [91102007](#) [91112001](#)  
[91001007](#) [91135001](#) [91154001](#) [91140001](#) [91102001](#) [92011001](#) [91104001](#) [91017001](#) [91133002](#) [91102014](#) [91006001](#) [91059001](#) [91102015](#)  
[91110002](#) [91152002](#) [91007003](#) [91003004](#) [91117010](#) [91025001](#) [91115001](#) [91144001](#) [91010004](#) [91143001](#) [91102004](#) [91003009](#) [91132001](#)  
[91003008](#) [91133001](#) [91147002](#) [91107012](#) [91031002](#) [91107002](#) [91007005](#) [91013001](#) [91136002](#) [91010005](#) [91006002](#)