


Features

- ❑ Transient protection for high-speed data lines
 - IEC 61000-4-2 (ESD) ±30kV (Air)
 - ±30kV (Contact)
 - IEC 61000-4-4 (EFT) 80 A (5/50ns)
 - IEC 61000-4-5 (Surge) 130A (8/20µs)
- ❑ Low leakage current: 0.1µA @ V_{RWM} (Maximum)
- ❑ Low operating and clamping voltage
- ❑ Each I/O pin can withstand over 1000 ESD strikes for ±8kV contact discharge

Description

TS1531LJX is a Transient Voltage Suppressor designed to provide electrostatic discharge (ESD) protection for one I/O data or power line. TS1531LJX is designed to protect parasitic-sensitive systems against over-voltage and over-current transient events. It complies with IEC 61000-4-2 (ESD), Level 4 (±15kV air, ±8kV contact discharge), IEC 61000-4-4 (electrical fast transient - EFT) (80A, 5/50 ns), IEC 61000-4-5 (Surge) (130A, 8/20µs), very fast charged device model (CDM) ESD and cable discharge event (CDE), etc.

Marking Codes



PINI DOT BY MARKING

Note:

- (1) “1531” is part number, fixed.
- (2) “XXX” is the last 3 characters of the wafer's Lot No., “Y” is the internal code.


Applications

- ❑ Cell Phone Handsets and Accessories
- ❑ Microprocessor based equipment
- ❑ Personal Digital Assistants (PDA's)
- ❑ Notebooks, Desktops, and Servers
- ❑ Portable Instrumentation
- ❑ Networking and Telecom
- ❑ Serial and Parallel Ports.
- ❑ Peripherals


Mechanical Characteristics

- ❑ DFN2.0*2.0-3L package
- ❑ Flammability Rating: UL 94V-0
- ❑ Marking: Part number
- ❑ Packaging: Tape and Reel
- ❑ High temperature soldering guaranteed:260°C/10s

Circuit Diagram



Pin Configuration

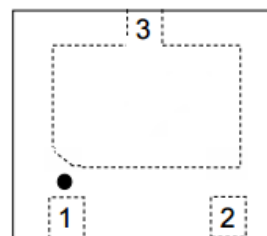

DFN2.0*2.0-3L

Top view




Absolute Maximum Rating

Symbol	Parameter	Value	Units
I_{PP}	Peak Pulse Current (8/20 μ s)	130	A
P_{PK}	Peak Pulse Power (8/20 μ s)	4200	Watts
V_{ESD}	ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	± 30 ± 30	kV
T_{OPT}	Operating Temperature	-55 to +150	$^{\circ}$ C
T_{STG}	Storage Temperature	-55 to +150	$^{\circ}$ C

Electrical Characteristics (T = 25 $^{\circ}$ C)

Symbol	Parameter
V_{RWM}	Nominal Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{t1}	Trigger Voltage
I_{t1}	Trigger Current @ V_{t1}
V_h	Holding Voltage
I_h	Holding Current @ V_h
V_C	Clamping Voltage @ I_{PP}
V_{CR}	Reverse Clamping Voltage @ I_{PP}
I_{PP}	Maximum Peak Pulse Current
C_{ESD}	Parasitic Capacitance

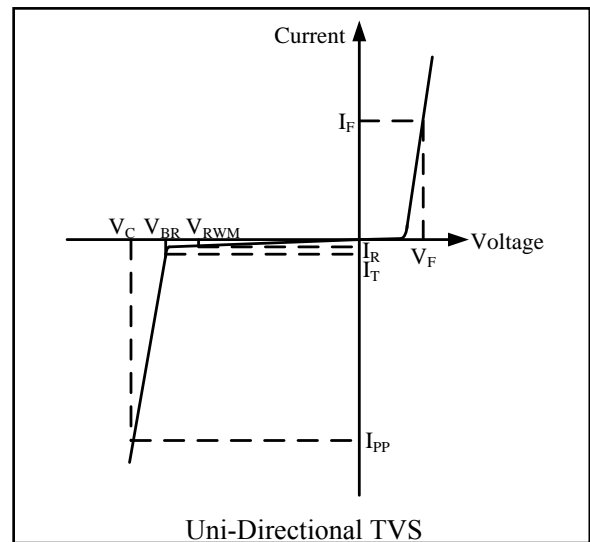

Symbol	Test Condition	Minimum	Typical	Maximum	Units
V_{RWM}				15.0	V
I_R	$V_{RWM} = 15.0V, T = 25^{\circ}C$			0.1	μ A
V_{BR}	$I_T = 1mA$	16		19	V
V_F	$I_F = 1mA$			0.8	V
V_C	$I_{PP} = 1A, t_p = 8/20\mu s$			22	V
V_C	$I_{PP} = 130A, t_p = 8/20\mu s$			40	V
C_{ESD}	$V_R = 0V, f = 1MHz$		1200		pF



Typical Characteristics

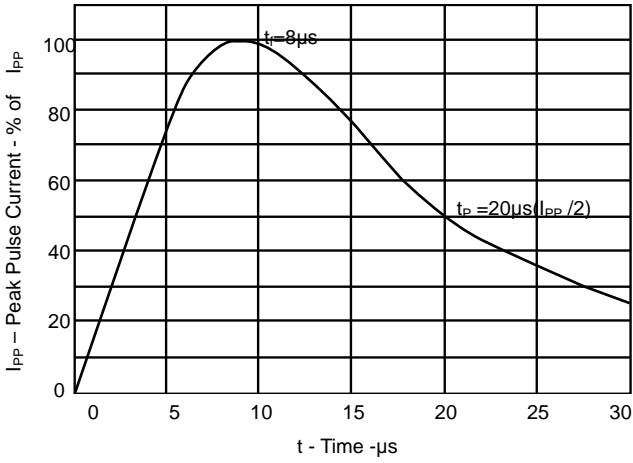


Fig 1. Pulse Waveform

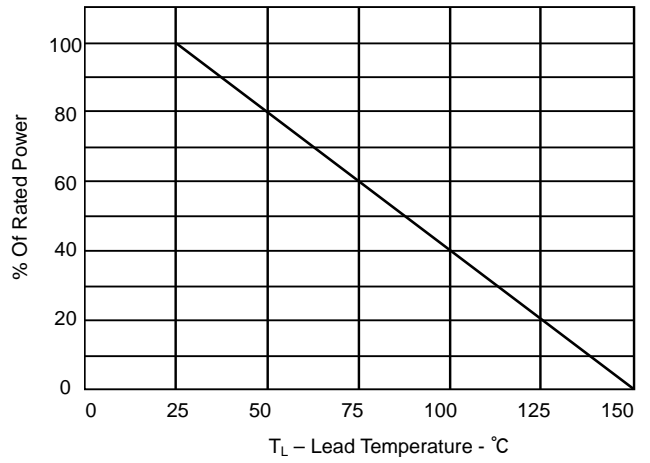


Fig 2. Power Derating Curve

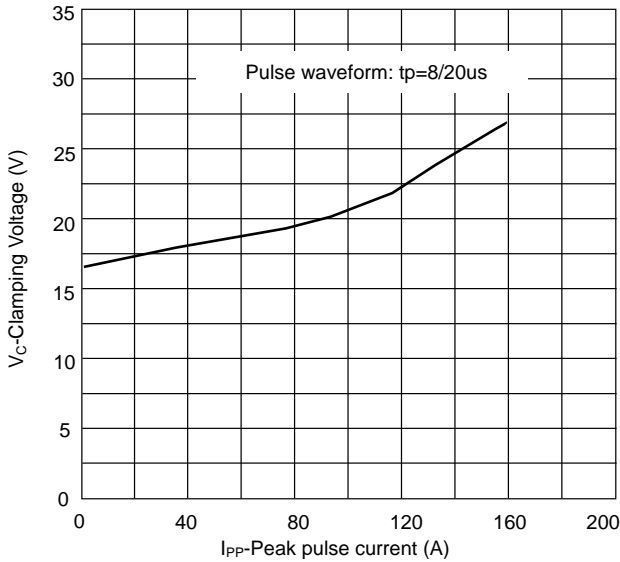


Fig 3. Clamping voltage vs. Peak pulse current



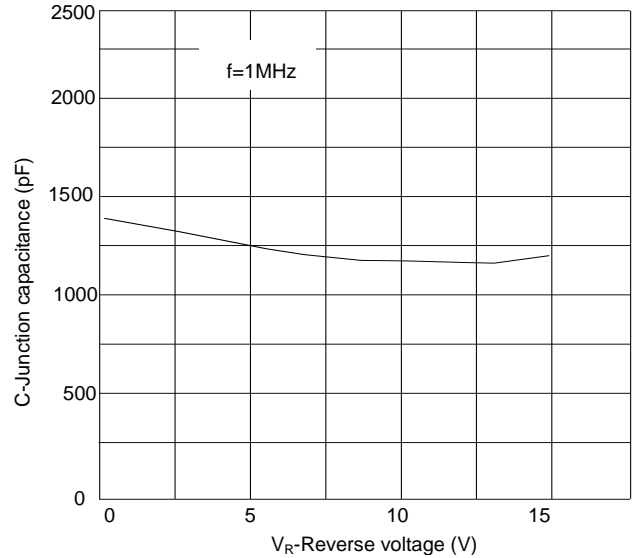


Fig 4. Capacitance vs. Reverse voltage

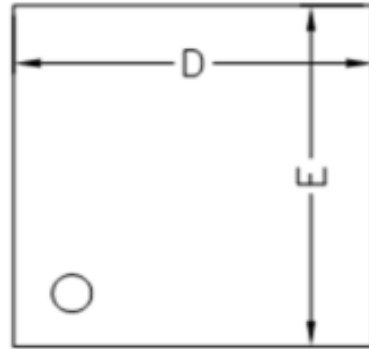


Package Outline

DFN2.0*2.0-3L

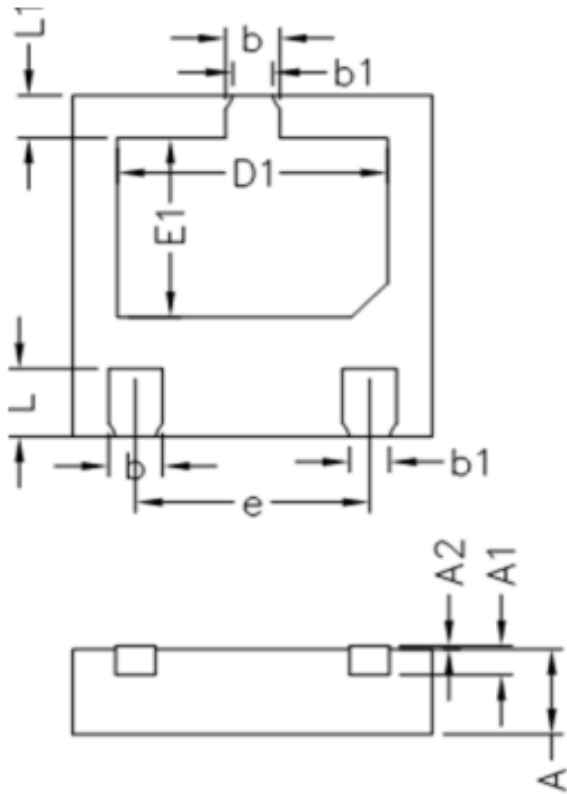

Units: mm

	Min	Nom	Max
D	1.95	2.00	2.05
E	1.95	2.00	2.05
D1	1.45	1.50	1.55
E1	1.00	1.05	1.10
L1	0.20	0.25	0.30
L	0.35	0.40	0.45
b1	0.22REF		
b	0.25	0.30	0.35
e	1.30BSC		
A1	0.15REF		
A2	0.00	0.02	0.05
A	0.45	0.50	0.55



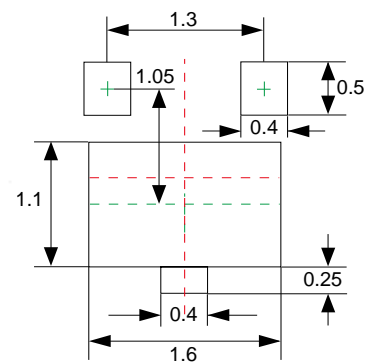


Recommended Soldering Pad

Unit:mm



Tape and Reel Specification

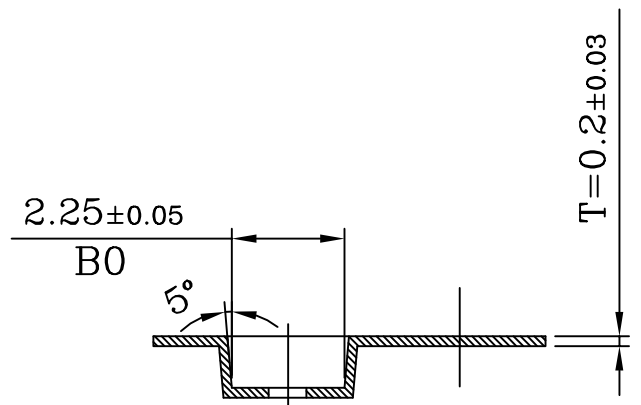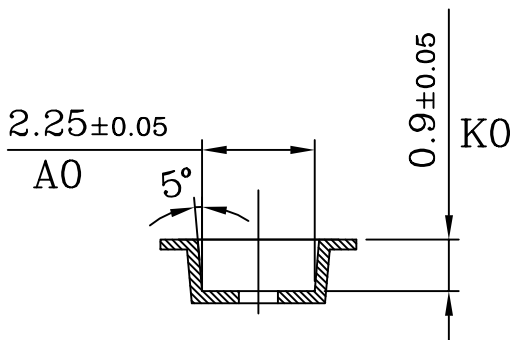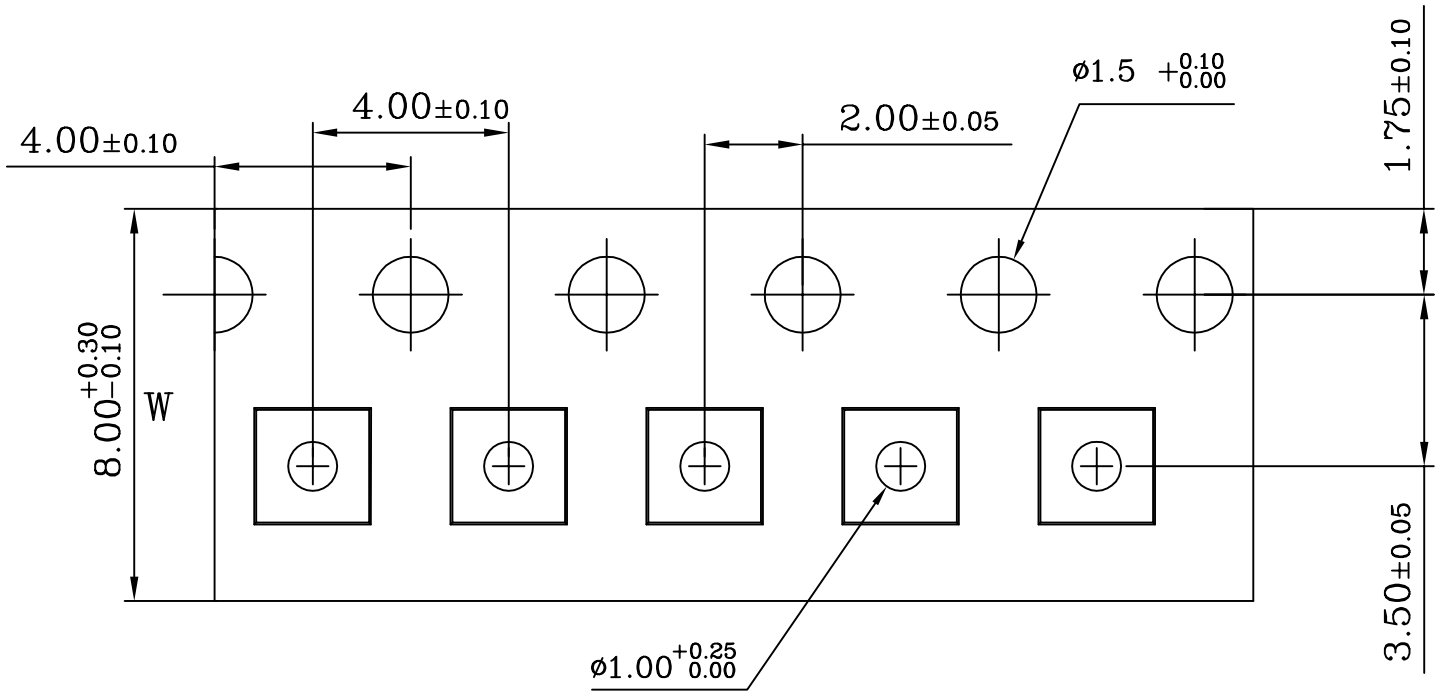

Ordering Information

Part Number	Working Voltage	Quantity Per Reel	Reel Size
TS1531LJX	15.0V	3,000	7 Inch

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Shenzhen JingYang](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)
[ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [CEN955](#) [W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)