

The TT0515NLX is designed to protect sensitive electronics from damage or latch-up due to ESD and other voltage induced transient events. They are designed for use in applications where board space is at a premium. Each device will protect up to five lines. They are unidirectional devices and may be used on lines where the signal polarities are above ground. TVS Diode Array For ESD and Latch-Up Protection

Features

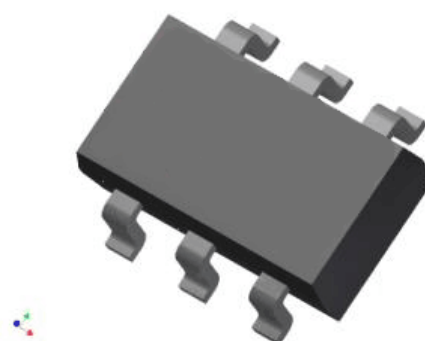
- Protects five I/O lines
- Low capacitance
- Working voltages : 5V
- Low leakage current
- Response Time is < 1 ns
- Low operating and clamping voltages
- Solid-state silicon avalanche technology
- Device Meets MSL 1 Requirements
- ROHS compliant

Main applications


- Cellular Handsets and Accessories
- Cordless Phones
- Personal Digital Assistants (PDA's)
- Notebooks and Handhelds
- Portable Instrumentation
- Digital Cameras
- Peripherals
- MP3 Players

Protection solution to meet

- IEC61000-4-2 (ESD) ±15kV (air), ±8kV (contact)
- IEC61000-4-4 (EFT) 40A (5/50ns)



SOT-23-6L



Ordering Information

Device	Qty per Reel	Reel Size
TT0515NLX	3000	7 Inch

Maximum ratings (Tamb=25°C Unless Otherwise Specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (tp=8/20µs waveform)	PPPP	50	Watts
Peak Pulse Current(tp=8/20µs waveform)	IPP	2.5	A
ESD Rating per IEC61000-4-2:	Contact	8	KV
	Air	15	
Lead Soldering Temperature	TL	260 (10 sec.)	°C
Operating Temperature Range	TJ	-55 ~ 150	°C
Storage Temperature Range	TSTG	-55 ~ 150	°C

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

*Other voltages may be available upon request.

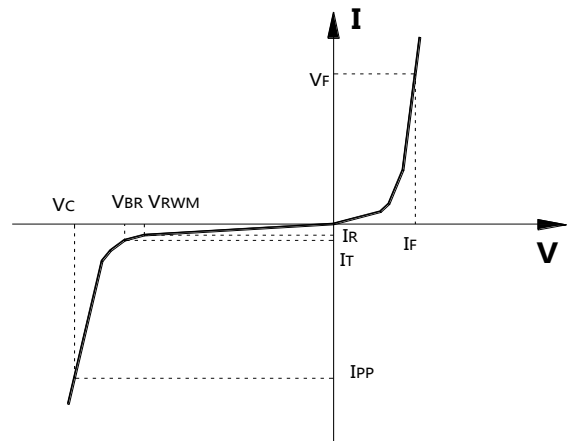
1. Non-repetitive current pulse, per Figure 1.

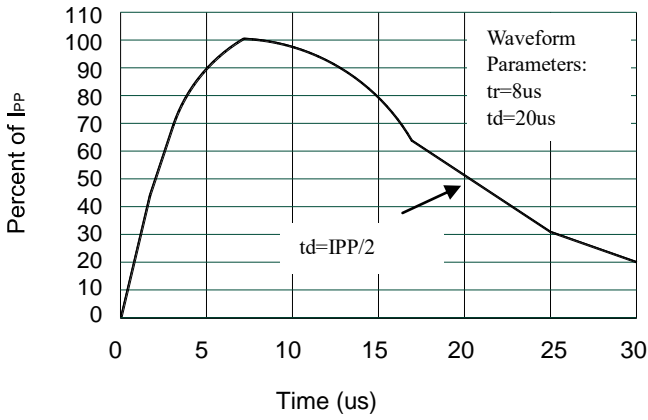
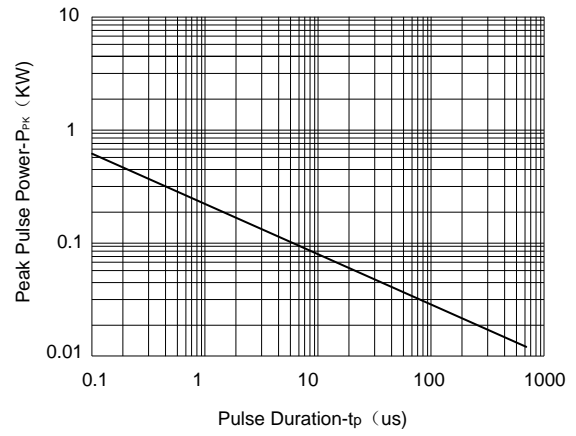
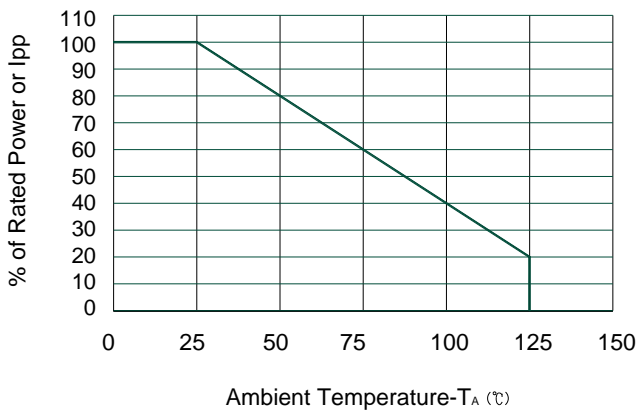
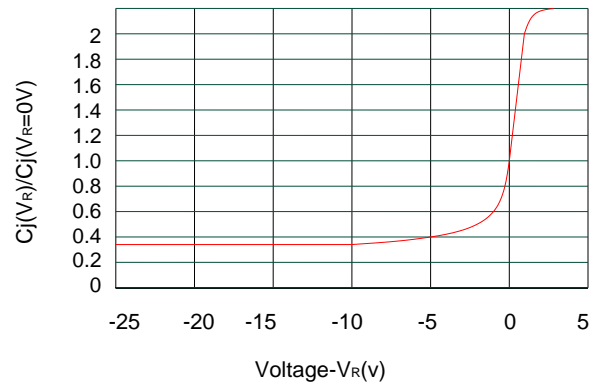
Electrical characteristics (Tamb=25°C Unless Otherwise Specified)

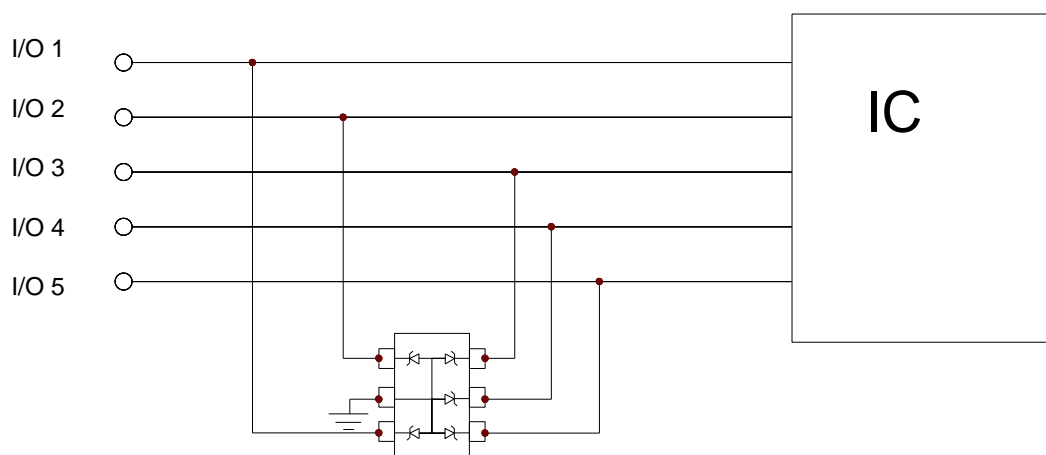
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units
VRWM	Reverse Working Voltage				5.0	V
VBR	Reverse Breakdown Voltage	IT = 1mA,	6.0			V
IR	Reverse Leakage Current	VRWM = 5V,			100	nA
VF	Diode Forward Voltage	IF = 15mA		0.85	1.2	V
VC	Clamping Voltage	IPP = 1A, tp =8/20µs,			10	V
		IPP = 2.5A, tp =8/20µs,			13	V
IPP	Peak Pulse Current	tp =8/20µs			2.5	A
CJ	Junction Capacitance	VR = 0V, f = 1MHz,		60		pF

Junction capacitance is measured in VR=0V,F=1MHz

Symbol	Parameter
VRWM	Working Peak Reverse Voltage
VBR	Breakdown Voltage @ IT
VC	Clamping Voltage @ IPP
IT	Test Current
IRM	Leakage current at VRWM
IPP	Peak pulse current
CO	Off-state Capacitance
CJ	Junction Capacitance



Typical electrical characterist applications

Pulse Waveform

Non-Repetitive Peak Pulse Power vs. Pulse Time

Power Derating Curve

Junction Capacitance vs. Reverse Voltage

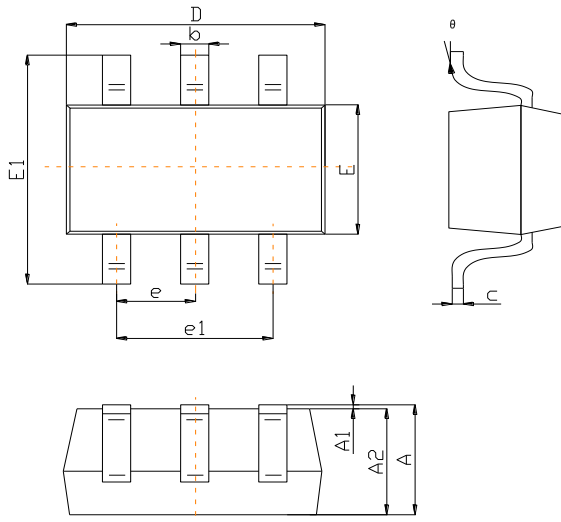
Typical applications

Device Connection for Protection of Five Data Lines

The TT0515NLX is designed to protect up to four unidirectional data lines. The device is connected as follows:

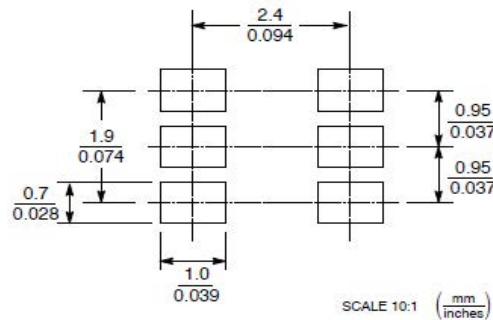
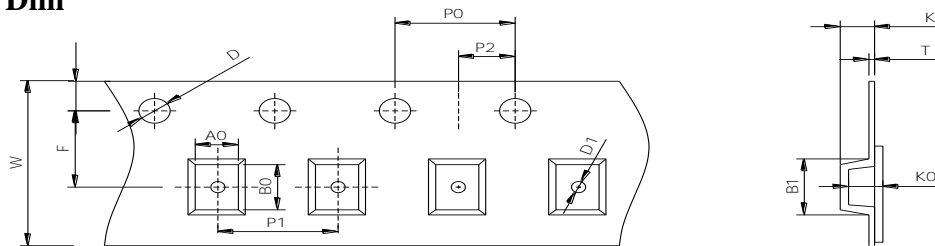
Unidirectional protection of five I/O lines is achieved by connecting pins 1, 3, 4, 5 and 6 to the data lines. Pin 2 is connected to ground. The ground connection should be made directly to the ground plane for best results. The path length is kept as short as possible to reduce the effects of parasitic inductance in the board traces.

Package Information
SOT23-6L
Mechanical Data

- Case: SOT23-6L
- Case Material: Molded Plastic. UL Flammability



DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0,950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0	8°	0	8°

Recommended Pad outline

SOT23-6L Reel Dim


Package	Chip Size	Pocket Size B0×A0×K0(mm)	Tape Width	Reel Diameter	Quantity Per Reel	P0	P1
SOT23-6L	3.00×1.60×1.20	3.20×1.80×1.40	8mm	178mm(7")	3000	4mm	4mm
D0	D1	E	F	K	T	W	
1.5mm	1.0mm	1.75mm	3.5mm	1.25mm	0.2mm	8mm	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Shenzhen JingYang](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)
[ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)