


3-Terminal Positive Voltage Regulator

FEATURES

- Maximum Output Current I_o : 0.15 A
- Output Voltage V_o : 5V/6V/8V/9V/10V/12V/15V/18V/20V/24V
- Continuous Total Dissipation
Pd: 0.5 W ($T_a = 25^\circ\text{C}$)



1: OUT 2: GND 3: IN
SOT-89 PLASTIC PACKAGE

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter		Symbol	Rating	Unit
Input Voltage	78L05~78L15	V_i	35	V
	78L18~78L24		40	
Output Current	78L05~78L24	I_o	150	mA
Power Dissipation		P_{tot}	500 ¹⁾	mW
Operating Temperature		T_{opr}	- 40 to + 85	$^\circ\text{C}$
Junction Temperature Range		T_j	- 40 to +125	$^\circ\text{C}$
Storage Temperature Range		T_{stg}	- 55 to +150	$^\circ\text{C}$

1) Device is installed in the heat dissipation good environment

78L05 Electrical Characteristics ($T_a = 25^\circ\text{C}$) (Unless otherwise specified, $V_i = 10\text{ V}$, $I_o = 40\text{ mA}$, $C_i = 0.33\ \mu\text{F}$, $C_o = 0.1\ \mu\text{F}$)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V_o	$T_j = 25^\circ\text{C}$	4.75	5	5.25	V
		$7\text{ V} \leq V_i \leq 20\text{ V}$, $1\text{ mA} \leq I_o \leq 40\text{ mA}$	4.65	5	5.35	V
Voltage Regulation	S_v	$7\text{ V} \leq V_i \leq 20\text{ V}$, $T_j = 25^\circ\text{C}$	--	--	150	mV
		$8\text{ V} \leq V_i \leq 20\text{ V}$, $T_j = 25^\circ\text{C}$	--	--	100	
Current Regulation	S_i	$1\text{ mA} \leq I_o \leq 100\text{ mA}$, $T_j = 25^\circ\text{C}$	--	--	60	mV
Quiescent Current	I_Q	$T_j = 25^\circ\text{C}$	--	--	6	mA
Quiescent Current Change	ΔI_Q	$8\text{ V} \leq V_i \leq 20\text{ V}$	--	--	1.5	mA
		$1\text{ mA} \leq I_o \leq 40\text{ mA}$	--	--	0.1	
Ripple Rejection	S_{rip}	$f = 120\text{ Hz}$, $8\text{ V} \leq V_i \leq 18\text{ V}$, $T_j = 25^\circ\text{C}$	--	49	--	dB
Dropout Voltage	V_{Drop}	$T_j = 25^\circ\text{C}$	--	1.7	--	V

SHIKE MAKE CONSCIOUS PRODUCT

CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE

REV.07



www.shike.tw

78L06 Electrical Characteristics (T_a = 25°C) (Unless otherwise specified, V_I = 10 V, I_O = 40 mA, C_I = 0.33 μF, C_O = 0.1 μF)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V _O	T _j = 25°C	5.70	6	6.30	V
		8.1 V ≤ V _I ≤ 21 V, 1 mA ≤ I _O ≤ 40 mA	5.58	6	6.42	V
Voltage Regulation	S _v	8.1 V ≤ V _I ≤ 21 V, T _j = 25°C	--	--	150	mV
		9 V ≤ V _I ≤ 21 V, T _j = 25°C	--	--	110	
Current Regulation	S _I	1 mA ≤ I _O ≤ 100 mA, T _j = 25°C	--	--	70	mV
Quiescent Current	I _Q	T _j = 25°C	--	--	6	mA
Quiescent Current Change	ΔI _Q	9 V ≤ V _I ≤ 21 V	--	--	1.5	mA
		1 mA ≤ I _O ≤ 40 mA	--	--	0.1	
Ripple Rejection	S _{rip}	f = 120 Hz, 9 V ≤ V _I ≤ 19 V, T _j = 25°C	--	47	--	dB
Dropout Voltage	V _{Drop}	T _j = 25°C	--	1.7	--	V

78L08 Electrical Characteristics (T_a = 25°C) (Unless otherwise specified, 0 ≤ T_J ≤ +125°C, V_I = 14V, I_O = 40mA, C_I = 0.33μF, C_O = 0.1μF)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V _O	T _j = 25°C	7.60	8	8.40	V
		10.5 V ≤ V _I ≤ 23 V, 1 mA ≤ I _O ≤ 40 mA	7.44	8	8.56	V
Voltage Regulation	S _v	10.5 V ≤ V _I ≤ 23 V, T _j = 25°C	--	--	175	mV
		11 V ≤ V _I ≤ 23 V, T _j = 25°C	--	--	125	
Current Regulation	S _I	1 mA ≤ I _O ≤ 100 mA, T _j = 25°C	--	--	80	mV
Quiescent Current	I _Q	T _j = 25°C	--	--	6.5	mA
Quiescent Current Change	ΔI _Q	11 V ≤ V _I ≤ 23 V	--	--	1.5	mA
		1 mA ≤ I _O ≤ 40 mA	--	--	0.1	
Ripple Rejection	S _{rip}	f = 120 Hz, 12 V ≤ V _I ≤ 23 V, T _j = 25°C	--	45	--	dB
Dropout Voltage	V _{Drop}	T _j = 25°C	--	1.7	--	V



78L09 Electrical Characteristics (T_a = 25°C) (Unless otherwise specified: 0 ≤ T_J ≤ +125°C, V_I = 15V, I_O = 40mA, C_I = 0.33μF, C_O = 0.1μF)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V _O	T _j = 25°C	8.55	9	9.45	V
		11.4 V ≤ V _I ≤ 24 V, 1 mA ≤ I _O ≤ 40 mA	8.37	9	9.63	V
Voltage Regulation	S _v	11.4 V ≤ V _I ≤ 24 V, T _j = 25°C	--	--	200	mV
		12 V ≤ V _I ≤ 24 V, T _j = 25°C	--	--	160	
Current Regulation	S _I	1 mA ≤ I _O ≤ 100 mA, T _j = 25°C	--	--	90	mV
Quiescent Current	I _Q	T _j = 25°C	--	--	6.5	mA
Quiescent Current Change	ΔI _Q	12 V ≤ V _I ≤ 24 V	--	--	1.5	mA
		1 mA ≤ I _O ≤ 40 mA	--	--	0.1	
Ripple Rejection	S _{rip}	f = 120 Hz, 12 V ≤ V _I ≤ 24 V, T _j = 25°C	--	44	--	dB
Dropout Voltage	V _{Drop}	T _j = 25°C	--	1.7	--	V

78L10 Electrical Characteristics (T_a = 25°C) (Unless otherwise specified: 0 ≤ T_J ≤ +125°C, V_I = 16V, I_O = 40mA, C_I = 0.33μF, C_O = 0.1μF)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V _O	T _j = 25°C	9.50	10	10.50	V
		12.5 V ≤ V _I ≤ 25 V, 1 mA ≤ I _O ≤ 40 mA	9.30	10	10.70	V
Voltage Regulation	S _v	12.5 V ≤ V _I ≤ 25 V, T _j = 25°C	--	--	230	mV
		13 V ≤ V _I ≤ 25 V, T _j = 25°C	--	--	170	
Current Regulation	S _I	1 mA ≤ I _O ≤ 100 mA, T _j = 25°C	--	--	90	mV
Quiescent Current	I _Q	T _j = 25°C	--	--	6.5	mA
Quiescent Current Change	ΔI _Q	13 V ≤ V _I ≤ 25	--	--	1.5	mA
		1 mA ≤ I _O ≤ 40 mA	--	--	0.1	
Ripple Rejection	S _{rip}	f = 120 Hz, 13 V ≤ V _I ≤ 24 V, T _j = 25°C	--	43	--	dB
Dropout Voltage	V _{Drop}	T _j = 25°C	--	1.7	--	V

78L12 Electrical Characteristics (T_a = 25°C) (Unless otherwise specified: 0 ≤ T_J ≤ +125°C, V_I = 19V, I_O = 40mA, C_I = 0.33μF, C_O = 0.1μF)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V _O	T _j = 25°C	11.40	12	12.60	V
		14.5 V ≤ V _I ≤ 27 V, 1 mA ≤ I _O ≤ 40 mA	11.16	12	12.84	V
Voltage Regulation	S _v	14.5 V ≤ V _I ≤ 27 V, T _j = 25°C	--	--	250	mV
		16 V ≤ V _I ≤ 27 V, T _j = 25°C	--	--	200	
Current Regulation	S _I	1 mA ≤ I _O ≤ 100 mA, T _j = 25°C	--	--	100	mV
Quiescent Current	I _Q	T _j = 25°C	--	--	6.5	mA
Quiescent Current Change	ΔI _Q	16 V ≤ V _I ≤ 27 V	--	--	1.5	mA
		1 mA ≤ I _O ≤ 40 mA	--	--	0.1	
Ripple Rejection	S _{rip}	f = 120 Hz, 15 V ≤ V _I ≤ 25V, T _j = 25°C	--	43	--	dB
Dropout Voltage	V _{Drop}	T _j = 25°C	--	1.7	--	V

SHIKE MAKE CONSCIOUS PRODUCT

CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE

REV.07



www.shike.tw

78L15 Electrical Characteristics (T_a = 25°C) (Unless otherwise specified: 0 ≤ T_J ≤ +125°C, V_I=23V, I_O=40mA, C_I=0.33μF, C_O=0.1μF)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V _O	T _j = 25°C	14.25	15	15.75	V
		17.5 V ≤ V _I ≤ 30V, 1 mA ≤ I _O ≤ 40 mA	13.95	15	16.05	V
Voltage Regulation	S _v	17.5 V ≤ V _I ≤ 30V, T _j = 25°C	--	--	200	mV
		20 V ≤ V _I ≤ 30V, T _j = 25°C	--	--	250	
Current Regulation	S _I	1 mA ≤ I _O ≤ 100 mA, T _j = 25°C	--	--	150	mV
Quiescent Current	I _Q	T _j = 25°C	--	--	6.5	mA
Quiescent Current Change	ΔI _Q	20 V ≤ V _I ≤ 30 V	--	--	1.5	mA
		1 mA ≤ I _O ≤ 40 mA	--	--	0.1	
Ripple Rejection	S _{rip}	f = 120 Hz, 18.5 V ≤ V _I ≤ 28.5V, T _j = 25°C	--	40	--	dB
Dropout Voltage	V _{Drop}	T _j = 25°C	--	1.7	--	V

78L18 Electrical Characteristics (T_a = 25°C) (Unless otherwise specified: 0 ≤ T_J ≤ +125°C, V_I=27V, I_O=40mA, C_I=0.33μF, C_O=0.1μF)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V _O	T _j = 25°C	17.10	18	18.90	V
		21.4 V ≤ V _I ≤ 33V, 1 mA ≤ I _O ≤ 40 mA	16.74	18	19.26	V
Voltage Regulation	S _v	21.4 V ≤ V _I ≤ 33V, T _j = 25°C	--	--	325	mV
		22 V ≤ V _I ≤ 33V, T _j = 25°C	--	--	275	
Current Regulation	S _I	1 mA ≤ I _O ≤ 100 mA, T _j = 25°C	--	--	170	mV
Quiescent Current	I _Q	T _j = 25°C	--	--	6.5	mA
Quiescent Current Change	ΔI _Q	22 V ≤ V _I ≤ 33V	--	--	1.5	mA
		1 mA ≤ I _O ≤ 40 mA	--	--	0.1	
Ripple Rejection	S _{rip}	f = 120 Hz, 23 V ≤ V _I ≤ 33V, T _j = 25°C	--	38	--	dB
Dropout Voltage	V _{Drop}	T _j = 25°C	--	1.7	--	V

78L20 Electrical Characteristics (T_a = 25°C) (Unless otherwise specified: 0 ≤ T_J ≤ +125°C, V_I=29V, I_O=40mA, C_I=0.33μF, C_O=0.1μF)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V _O	T _j = 25°C	19.0	20	21.0	V
		23.5 V ≤ V _I ≤ 35V, 1 mA ≤ I _O ≤ 40 mA	18.60	20	21.40	V
Voltage Regulation	S _v	23.5 V ≤ V _I ≤ 35V, T _j = 25°C	--	--	330	mV
		24V ≤ V _I ≤ 35V, T _j = 25°C	--	--	285	
Current Regulation	S _I	1 mA ≤ I _O ≤ 100 mA, T _j = 25°C	--	--	180	mV
Quiescent Current	I _Q	T _j = 25°C	--	--	6.5	mA
Quiescent Current Change	ΔI _Q	24V ≤ V _I ≤ 35V	--	--	1.5	mA
		1 mA ≤ I _O ≤ 40 mA	--	--	0.1	
Ripple Rejection	S _{rip}	f = 120 Hz, 25V ≤ V _I ≤ 35V, T _j = 25°C	--	37	--	dB
Dropout Voltage	V _{Drop}	T _j = 25°C	--	1.7	--	V

SHIKE MAKE CONSCIOUS PRODUCT

CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE



78L24 Electrical Characteristics (T_a = 25°C) (Unless otherwise specified: 0 ≤ T_J ≤ +125°C, V_I = 33V, I_O = 40mA, C_I = 0.33μF, C_O = 0.1μF)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V _O	T _J = 25°C	22.80	24	25.20	V
		27.5 V ≤ V _I ≤ 38V, 1 mA ≤ I _O ≤ 40 mA	22.32	24	25.68	V
Voltage Regulation	S _V	27.5 V ≤ V _I ≤ 38V, T _J = 25°C	--	--	350	mV
		28V ≤ V _I ≤ 38V, T _J = 25°C	--	--	300	
Current Regulation	S _I	1 mA ≤ I _O ≤ 100 mA, T _J = 25°C	--	--	200	mV
Quiescent Current	I _Q	T _J = 25°C	--	--	6.5	mA
Quiescent Current Change	ΔI _Q	28V ≤ V _I ≤ 38V	--	--	1.5	mA
		1 mA ≤ I _O ≤ 40 mA	--	--	0.1	
Ripple Rejection	S _{rip}	f = 120 Hz, 29V ≤ V _I ≤ 39V, T _J = 25°C	--	35	--	dB
Dropout Voltage	V _{Drop}	T _J = 25°C	--	1.7	--	V

Electrical characteristic curve

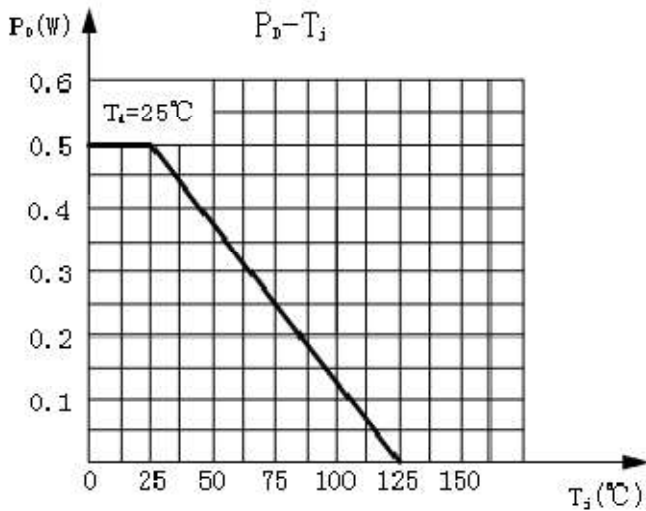


Figure 1: dissipation power relationship with the temperature curve


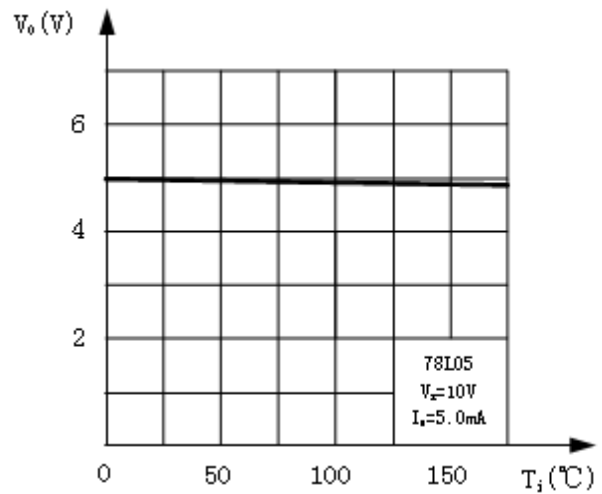


Figure 2 output voltage and junction temperature curve



Outline Dimension

Unit: mm

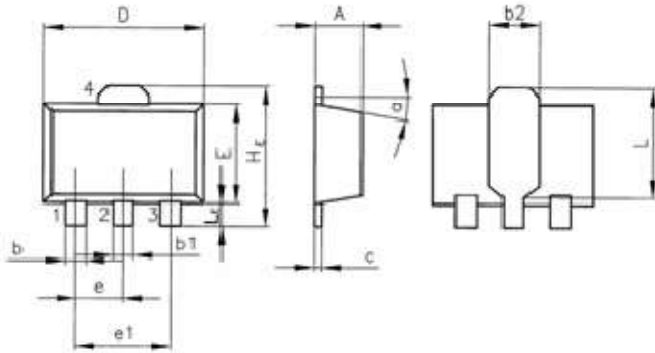

SOT-89			
Symbol	min	typ	max
A	1.4	---	1.6
b	0.35	---	0.55
b1	0.4	---	0.65
b2	---	1.6	---
c	0.35	---	0.45
D	4.4	---	4.6
E	2.35	---	2.55
e	---	1.5	---
e1	---	3	---
HE	---	4.15	---
L	---	2.7	---
LE	---	1.0	---
a	---	5°	---



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [Shikues](#) manufacturer:

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [636416C](#)
[714954EB](#) [ZMR500QFTA](#) [LV5680P-E](#) [L78M15CV-DG](#) [L79M05T-E](#) [MIC5283-5.0YML-T5](#) [TLS202A1MBVHTSA1](#) [L78LR05D-MA-E](#)
[NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [MP2018GZD-5-Z](#) [MP2018GZD-33-Z](#)
[MD57E21WB6](#) [MD57E28WB6](#) [WL2810D33-4/TR](#) [WL2815D33-4/TR](#) [ZTS6538SE](#) [MC78L06BP-AP](#) [TA48LS05F\(TE85L,F\)](#)
[TA78L12F\(TE12L,F\)](#) [TC47BR5003ECT](#) [TCR2LN12,LF\(S](#) [TCR2LN28,LF\(S](#) [TCR2LN30,LF\(S](#) [TCR3DF295,LM\(CT](#) [TCR3DF40,LM\(CT](#)
[TPS549B22RVFT](#) [L78M12ABDT](#) [LM7812SX/NOPB](#) [LR645N3-G-P003](#) [LR645N3-G-P013](#) [ZXTR2005P5-13](#) [SCD7812BTG](#)
[TCR3DF335,LM\(CT](#) [ZXTR2012K-13](#) [TLE42994E V33](#) [ZXTR2008K-13](#)