


3-Terminal Positive Voltage Regulator

FEATURES

- Maximum Output Current I_o : 0.1 A
- Output Voltage V_o : 5V/6V/8V/9V/10V/12V/15V
- Continuous Total Dissipation
 P_D : 0.5 W ($T_a = 25^\circ C$)



1: OUT 2: GND 3: IN

SOT-89 PLASTIC PACKAGE


Absolute Maximum Ratings ($T_a = 25^\circ C$)

Parameter	Symbol	Rating	Unit
Input Voltage	V_I	30	V
		35	V
Power Dissipation	P_{tot}	500 1)	mW
Operating Temperature	T_{opr}	- 20 to + 120	°C
Storage Temperature Range	T_{stg}	- 55 to +150	°C

1) 15 mm X 25 mm X 0.7 mm alumina ceramic board, $T_a \leq 25^\circ C$


Electrical Characteristics ($T_a = 25^\circ C$) (Unless otherwise specified, $0^\circ C \leq T_j \leq 125^\circ C$, $V_I = 10 V$, $I_O = 40 mA$, $C_1 = 0.33 \mu F$, $C_2 = 0.1 \mu F$)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V_o	$T_j = 25^\circ C$	4.8	5	5.2	V
		$7 V \leq V_I \leq 20 V$, $1 mA \leq I_O \leq 40 mA$	4.75	--	5.25	V
		$V_I = 10 V$, $1 mA \leq I_O \leq 70 mA$	4.75	--	5.25	V
Line Regulation	Regline	$7 V \leq V_I \leq 20 V$, $T_j = 25^\circ C$	--	--	150	mV
		$8 V \leq V_I \leq 20 V$, $T_j = 25^\circ C$	--	--	100	
Load Regulation	Regload	$1 mA \leq I_O \leq 100 mA$, $T_j = 25^\circ C$	--	--	60	mV
		$1 mA \leq I_O \leq 40 mA$, $T_j = 25^\circ C$	--	--	30	
Quiescent Current	I_Q	$T_j = 25^\circ C$	--	--	5.5	mA
Quiescent Current Change	ΔI_Q	$8 V \leq V_I \leq 20 V$	--	--	1.5	mA
		$1 mA \leq I_O \leq 40 mA$	--	--	0.1	
Output Noise Voltage	V_N	$10 Hz \leq f \leq 100 KHz$, $T_j = 25^\circ C$	--	40	--	μ V
Ripple Rejection	RR	$f = 120 Hz$, $8 V \leq V_I \leq 18 V$, $T_j = 25^\circ C$	41	--	--	dB
Dropout Voltage	V_{Drop}	$T_j = 25^\circ C$	--	1.7	--	V

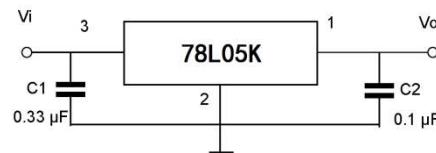

Electrical Characteristics ($T_a = 25^\circ\text{C}$) (Unless otherwise specified, $0^\circ\text{C} \leq TJ \leq 125^\circ\text{C}$, $VI = 11\text{ V}$, $IO = 40\text{ mA}$, $CI = 0.33\text{ }\mu\text{F}$, $C2 = 0.1\text{ }\mu\text{F}$)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V_o	$T_j = 25^\circ\text{C}$	5.76	6	6.24	V
		$8.5\text{V} \leq VI \leq 21\text{V}, 1\text{ mA} \leq IO \leq 40\text{ mA}$	5.7	--	6.3	V
		$VI = 11\text{ V}, 1\text{ mA} \leq IO \leq 70\text{ mA}$	5.7	--	6.3	V
Line Regulation	Regline	$8.5\text{V} \leq VI \leq 21\text{V}, T_j = 25^\circ\text{C}$	--	--	155	mV
		$9\text{ V} \leq VI \leq 21\text{ V}, T_j = 25^\circ\text{C}$	--	--	105	
Load Regulation	Regload	$1\text{ mA} \leq IO \leq 100\text{ mA}, T_j = 25^\circ\text{C}$	--	--	65	mV
		$1\text{ mA} \leq IO \leq 40\text{ mA}, T_j = 25^\circ\text{C}$	--	--	35	
Quiescent Current	I_Q	$T_j = 25^\circ\text{C}$	--	--	5.5	mA
Quiescent Current Change	ΔI_Q	$9\text{ V} \leq VI \leq 21\text{ V}, IO = 40\text{ mA}$	--	--	1.5	mA
		$VI = 11\text{ V}, 1\text{ mA} \leq IO \leq 40\text{ mA}$	--	--	0.1	
Output Noise Voltage	V_N	$10\text{ Hz} \leq f \leq 100\text{ KHz}, T_j = 25^\circ\text{C}$	--	49	--	$\mu\text{ V}$
Ripple Rejection	RR	$f = 120\text{ Hz}, 9\text{ V} \leq VI \leq 19\text{ V}, T_j = 25^\circ\text{C}$	40	--	--	dB
Dropout Voltage	V_{Drop}	$T_j = 25^\circ\text{C}$	--	1.7	--	V

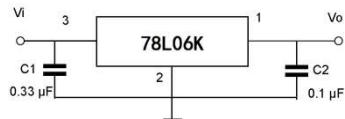


Electrical Characteristics ($T_a = 25^\circ\text{C}$) (Unless otherwise specified, $0^\circ\text{C} \leq TJ \leq 125^\circ\text{C}$, $VI = 14\text{ V}$, $IO = 40\text{ mA}$, $CI = 0.33\text{ }\mu\text{F}$, $C2 = 0.1\text{ }\mu\text{F}$)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V_o	$T_j = 25^\circ\text{C}$	7.7	8	8.3	V
		$10.5\text{V} \leq VI \leq 23\text{V}, 1\text{ mA} \leq IO \leq 40\text{ mA}$	7.6	--	8.4	V
		$VI = 14\text{ V}, 1\text{ mA} \leq IO \leq 70\text{ mA}$	7.6	--	8.4	V
Line Regulation	Regline	$10.5\text{V} \leq VI \leq 23\text{V}, T_j = 25^\circ\text{C}$	--	--	175	mV
		$11\text{ V} \leq VI \leq 23\text{ V}, T_j = 25^\circ\text{C}$	--	--	125	
Load Regulation	Regload	$1\text{ mA} \leq IO \leq 100\text{ mA}, T_j = 25^\circ\text{C}$	--	--	80	mV
		$1\text{ mA} \leq IO \leq 40\text{ mA}, T_j = 25^\circ\text{C}$	--	--	40	
Quiescent Current	I_Q	$T_j = 25^\circ\text{C}$	--	--	5.5	mA
Quiescent Current Change	ΔI_Q	$12\text{ V} \leq VI \leq 23\text{ V}, IO = 40\text{ mA}$	--	--	1.5	mA
		$VI = 14\text{ V}, 1\text{ mA} \leq IO \leq 40\text{ mA}$	--	--	0.1	
Output Noise Voltage	V_N	$10\text{ Hz} \leq f \leq 100\text{ KHz}, T_j = 25^\circ\text{C}$	--	60	--	$\mu\text{ V}$
Ripple Rejection	RR	$f = 120\text{ Hz}, 12\text{ V} \leq VI \leq 22\text{ V}, T_j = 25^\circ\text{C}$	39	--	--	dB
Dropout Voltage	V_{Drop}	$T_j = 25^\circ\text{C}$	--	1.7	--	V

78L05K THRU 78L15K

Electrical Characteristics ($T_a = 25^\circ C$) (Unless otherwise specified, $0^\circ C \leq T_j \leq 125^\circ C$, $V_i = 15 V$, $I_o = 40 mA$, $C_1 = 0.33 \mu F$, $C_2 = 0.1 \mu F$)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V_o	$T_j = 25^\circ C$	8.64	9	9.36	V
		$11.4V \leq V_i \leq 24V$, $1 mA \leq I_o \leq 40 mA$	8.55	--	9.45	V
		$V_i = 15 V$, $1 mA \leq I_o \leq 70 mA$	8.55	--	9.45	V
Line Regulation	Regline	$11.4V \leq V_i \leq 24V$, $T_j = 25^\circ C$	--	--	200	mV
		$12 V \leq V_i \leq 24 V$, $T_j = 25^\circ C$	--	--	160	
Load Regulation	Regload	$1 mA \leq I_o \leq 100 mA$, $T_j = 25^\circ C$	--	--	90	mV
		$1 mA \leq I_o \leq 40 mA$, $T_j = 25^\circ C$	--	--	45	
Quiescent Current	I_q	$T_j = 25^\circ C$	--	--	6	mA
Quiescent Current Change	ΔI_q	$12 V \leq V_i \leq 24 V$, $I_o = 40 mA$	--	--	1.5	mA
		$V_i = 15 V$, $1 mA \leq I_o \leq 40 mA$	--	--	0.1	
Output Noise Voltage	V_N	$10 Hz \leq f \leq 100 KHz$, $T_j = 25^\circ C$	--	70	--	μV
Ripple Rejection	RR	$f = 120 Hz$, $12 V \leq V_i \leq 24 V$, $T_j = 25^\circ C$	38	--	--	dB
Dropout Voltage	V_{Drop}	$T_j = 25^\circ C$	--	1.7	--	V

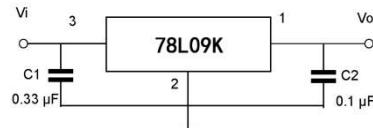


Electrical Characteristics ($T_a = 25^\circ C$) at specified virtual junction temperature, $V_i = 17V$, $I_o = 40mA$ (unless otherwise noted)

Parameter	Test Conditions*	78L10			Units
		Min	Typ	Max	
Output voltage**		25°C	9.6	10	10.4
	$I_o = 1mA$ to $40 mA$, $V_i = 13V$ to $25V$	$0^\circ C$ to $125^\circ C$	9.5	10	10.5
	$I_o = 1mA$ to $70mA$,		9.5	10	10.5
Input regulation	$V_i = 13V$ to $25V$	25°C		51	175
	$V_i = 14V$ to $25V$			42	125
Ripple rejection	$V_i = 15V$ to $25V$, $f = 120Hz$	$0^\circ C$ to $125^\circ C$	37	44	
Output regulation	$I_o = 1mA$ to $100mA$	25°C		20	90
	$I_o = 1mA$ to $40mA$			11	40
Output noise voltage	$f = 10Hz$ to $100 KHz$	25°C		62	
Dropout voltage		25°C		1.7	
Bias current		25°C		4.2	6
		125°C			5.5
Bias current change	$V_i = 14V$ to $25V$	$0^\circ C$ to $125^\circ C$			1.5
	$I_o = 1mA$ to $40mA$				0.1

Electrical Characteristics ($T_a = 25^\circ C$) (Unless otherwise specified, $0^\circ C \leq T_j \leq 125^\circ C$, $V_I = 19 V$, $I_O = 40 mA$, $C_I = 0.33 \mu F$, $C_2 = 0.1 \mu F$)


Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Voltage	V_O	$T_j = 25^\circ C$	11.5	12	12.5	V
		$14.5V \leq V_I \leq 27V$, $1 mA \leq I_O \leq 40 mA$	11.4	--	12.6	V
		$V_I = 19 V$, $1 mA \leq I_O \leq 70 mA$	11.4	--	12.6	V
Line Regulation	Regline	$14.5V \leq V_I \leq 27V$, $T_j = 25^\circ C$	--	--	250	mV
		$16 V \leq V_I \leq 27 V$, $T_j = 25^\circ C$	--	--	200	
Load Regulation	Regload	$1 mA \leq I_O \leq 100 mA$, $T_j = 25^\circ C$	--	--	100	mV
		$1 mA \leq I_O \leq 40 mA$, $T_j = 25^\circ C$	--	--	50	
Quiescent Current	I_Q	$T_j = 25^\circ C$	--	--	6	mA
Quiescent Current Change	ΔI_Q	$16 V \leq V_I \leq 27 V$	--	--	1.5	mA
		$1 mA \leq I_O \leq 40 mA$	--	--	0.1	
Output Noise Voltage	V_N	$10 Hz \leq f \leq 100 KHz$, $T_j = 25^\circ C$	--	80	--	μV
Ripple Rejection	RR	$f = 120 Hz$, $15 V \leq V_I \leq 25 V$, $T_j = 25^\circ C$	37	--	--	dB
Dropout Voltage	V_{Drop}	$T_j = 25^\circ C$	--	1.7	--	V

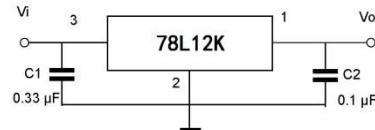








Electrical Characteristics (Unless otherwise specified, $V_{IN} = 23 V$, $I_{OUT} = 40 mA$, $C_{IN} = 0.33 \mu F$, $C_{OUT} = 0.1 \mu F$, $T_j = 25^\circ C$)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Output Voltage	V_{OUT}	14.4	15	15.6	V
Output Voltage $17.5 V \leq V_{IN} \leq 30 V$, $1 mA \leq I_{OUT} \leq 40 mA$	V_{OUT}	14.25	-	15.75	V
Output Voltage $V_{IN} = 23 V$, $1 mA \leq I_{OUT} \leq 70 mA$	V_{OUT}	14.25	-	15.75	V
Input Regulation $17.5 V \leq V_{IN} \leq 30 V$ $19 V \leq V_{IN} \leq 30 V$	Reg. line	-	-	300	mV
		-	-	250	
Load Regulation $1 mA \leq I_{OUT} \leq 100 mA$ $1 mA \leq I_{OUT} \leq 40 mA$	Reg. load	-	-	150	mV
		-	-	75	
Quiescent Current	I_Q	-	-	6.5	mA
Quiescent Current Change $19 V \leq V_{IN} \leq 30 V$ $1 mA \leq I_{OUT} \leq 40 mA$	ΔI_Q With line With load	-	-	1.5	mA
		-	-	0.1	
Output Noise Voltage at $T_a = 25^\circ C$, $10 Hz \leq f \leq 100 KHz$	V_{NO}	-	90	-	μV
Ripple Rejection at $f = 120 Hz$, $18.5 V \leq V_{IN} \leq 28.5 V$, $T_j = 25^\circ C$	RR	34	-	-	dB
Dropout Voltage at $T_j = 25^\circ C$	$ V_{IN}-V_{OUT} $	-	1.7	-	V

78L05K Typical Characteristics

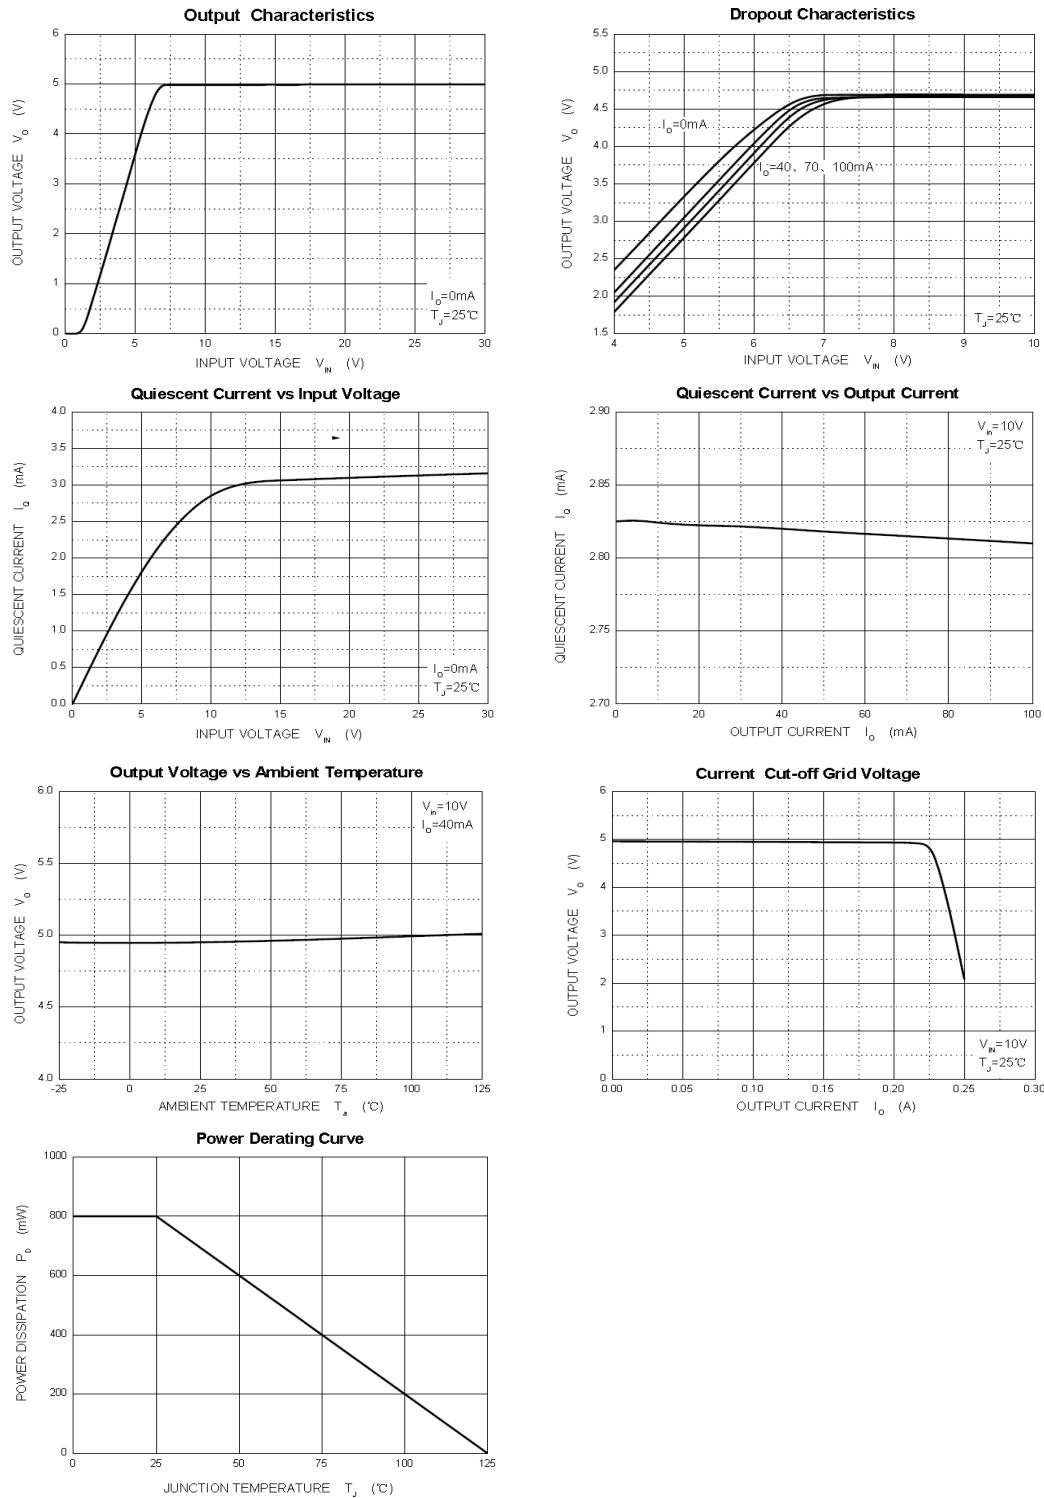


78L12K Typical Characteristics

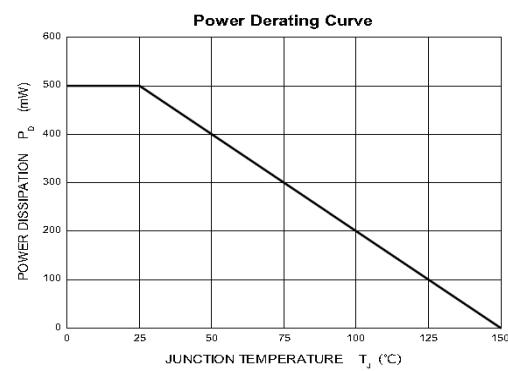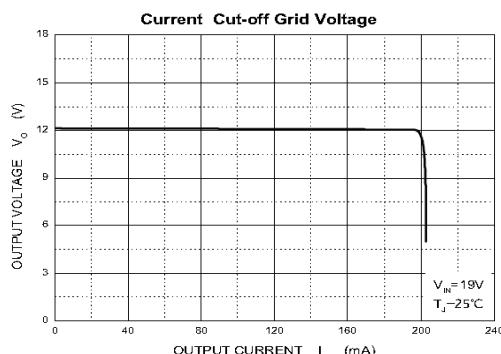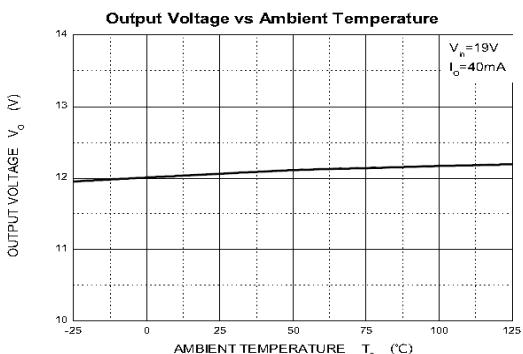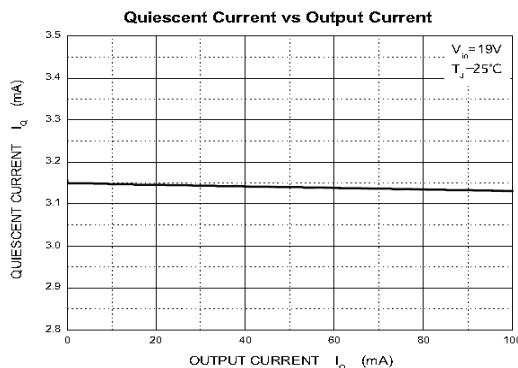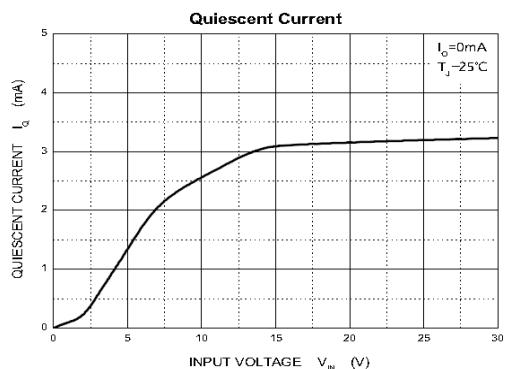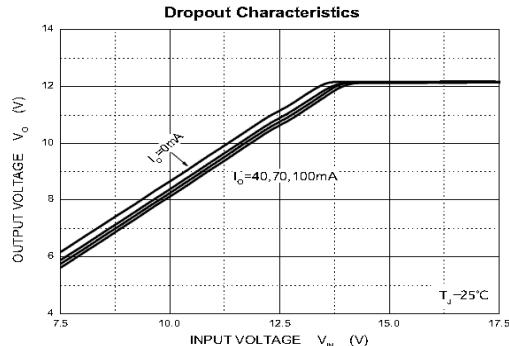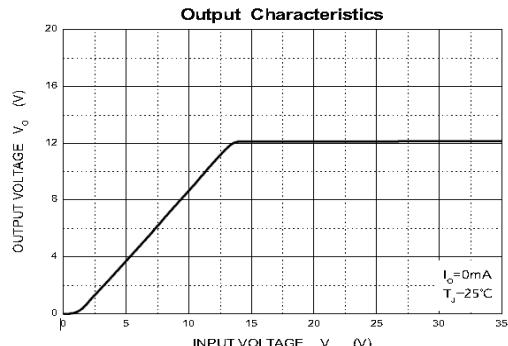

SOT-89 PACKAGE OUTLINE

Unit: mm

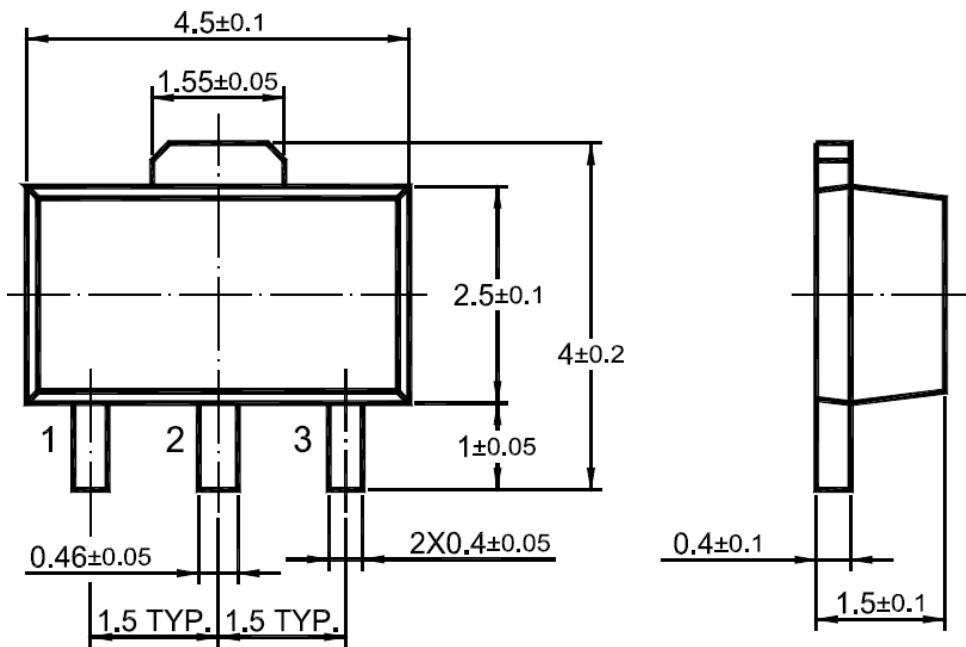

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [Shikues manufacturer:](#)

Other Similar products are found below :

[LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [LV56801P-E](#) [UA7805CKC](#) [714954EB](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#)
[NCV78M05ABDTRKG](#) [LV5680P-E](#) [L79M05T-E](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#)
[LV5680NPVC-XH](#) [ZTS6538SE](#) [UA78L09CLP](#) [UA78L09CLPR](#) [CAT6221-PPTD-GT3](#) [MC78M09CDTRK](#) [NCV51190MNTAG](#)
[BL1118CS8TR1833](#) [BL8563CKETR18](#) [BL8077CKETR33](#) [BL9153-33CC3TR](#) [BL9161G-15BADRN](#) [BL9161G-28BADRN](#)
[BRC07530MMC](#) [CJ7815B-TFN-ARG](#) [LM317C](#) [GM7333K](#) [GM7350K](#) [XC6206P332MR](#) [HT7533](#) [LM7912S/TR](#) [LT1764S/TR](#) [LM7805T](#)
[LM338T](#) [LM1117IMP-3.3/TR](#) [HT1117AM-3.3](#) [HT7550S](#) [AMS1117-3.3](#) [HT7150S](#) [78L12](#) [HT7550](#) [HT7533-1](#) [HXY6206I-2.5](#) [HT7133](#)