


■ Features

- 1.4V maximum dropout at full load current
- Fast transient response
- Output current limiting
- Built-in thermal shutdown
- Good noise rejection
- 3-Terminal Adjustable or Fixed 1.5V, 1.8V, 1.9V, 2.5V, 3.3V, 5.0V

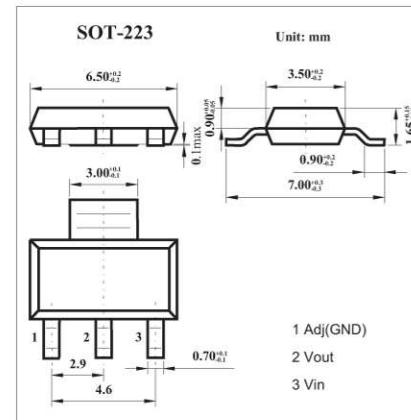


■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Maximum Input Voltage	V _{in}	18	V
Power Dissipation	P _D	Internally Limited	
Thermal Resistance Junction-to-Ambient	θ _{JA}	117	°C/W
Thermal Resistance Junction-to-Case *	θ _{JC}	15	°C/W
Operating Junction Temperature Range	T _{OP}	0 to +150	°C
Storage Temperature	T _{ST}	-65 to +150	°C

* Control Circuitry/Power Transistor


■ Block Diagram

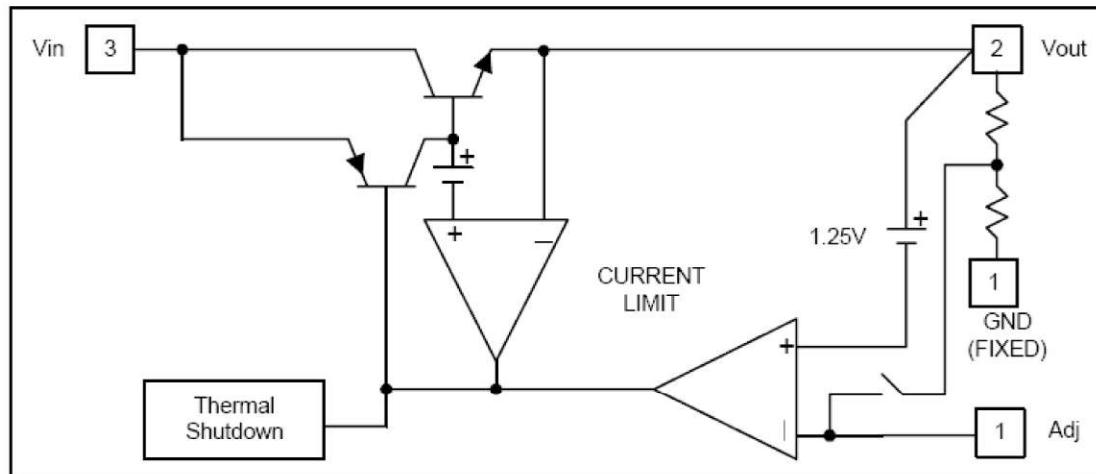

■ Electrical Characteristics $T_a = 25^\circ C$

Parameter		Testconditons	Min	Typ	Max	Unit
Reference Voltage	AMS1117-ADJ	$T_J=25^\circ C, (V_{IN}-OUT)=1.5V, I_o=10mA$	1.225	1.250	1.275	V
Output Voltage	AMS1117-1.5	$I_{OUT} = 10mA, T_J = 25^\circ C, 3V \leq V_{IN} \leq 12V$	1.470	1.500	1.530	V
	AMS1117-1.8	$I_{OUT} = 10mA, T_J = 25^\circ C, 3.3V \leq V_{IN} \leq 12V$	1.764	1.800	1.836	V
	AMS1117-1.9	$I_{OUT} = 10mA, T_J = 25^\circ C, 3.3V \leq V_{IN} \leq 12V$	1.862	1.900	1.938	V
	AMS1117-2.5	$I_{OUT} = 10mA, T_J = 25^\circ C, 4V \leq V_{IN} \leq 12V$	2.450	2.500	2.550	V
	AMS1117-3.3	$I_{OUT} = 10mA, T_J = 25^\circ C, 4.8V \leq V_{IN} \leq 12V$	3.235	3.300	3.365	V
	AMS1117-5.0	$I_{OUT} = 10mA, T_J = 25^\circ C, 6.5V \leq V_{IN} \leq 12V$	4.900	5.000	5.100	V
Line Regulation	AMS1117-XXX	$I_o=10mA, V_{OUT}+1.5V < V_{IN} < 12V, T_J=25^\circ C$			0.2	%
Load Regulation	AMS1117-ADJ	$V_{IN}=3.3V, V_{adj}=0mA < I_o < 1A, T_J=25^\circ C$			1	%
	AMS1117-1.5	$V_{IN}=3V, 0mA < I_o < 1A, T_J=25^\circ C$		12	15	mV
	AMS1117-1.8	$V_{IN}=3.3V, 0mA < I_o < 1A, T_J=25^\circ C$		15	18	mV
	AMS1117-1.9	$V_{IN}=3.3V, 0mA < I_o < 1A, T_J=25^\circ C$		16	19	mV
	AMS1117-2.5	$V_{IN}=4V, 0mA < I_o < 1A, T_J=25^\circ C$		20	25	mV
	AMS1117-3.3	$V_{IN}=5V, 0mA \leq I_o \leq 1A, T_J=25^\circ C$		26	33	mV
	AMS1117-5.0	$V_{IN}=8V, 0mA \leq I_o \leq 1A, T_J=25^\circ C$		40	50	mV
Dropout Voltage ($V_{IN}-V_{OUT}$)	AMS1117-XXX	$I_{OUT} = 1A, \Delta V_{OUT}=0.1\%V_{OUT}$		1.3	1.4	V
Current Limit	AMS1117-XXX	$(V_{IN}-V_{OUT}) = 5V$	1.1			A
Minimum Load Current	AMS1117-XXX	$0^\circ C \leq T_J \leq 125^\circ C$		5	10	mA
Thermal Regulation		$T_a=25^\circ C, 30ms$ pulse		0.008	0.04	%/W
Ripple Rejection		$F=120Hz, C_{OUT}=25\mu F$ Tantalum, $I_{OUT}=1A$				
	AMS1117-XXX	$V_{IN}=V_{OUT}+3V$		60	70	dB
Temperature Stability		$I_o=10mA$		0.5		%

Typical Applications

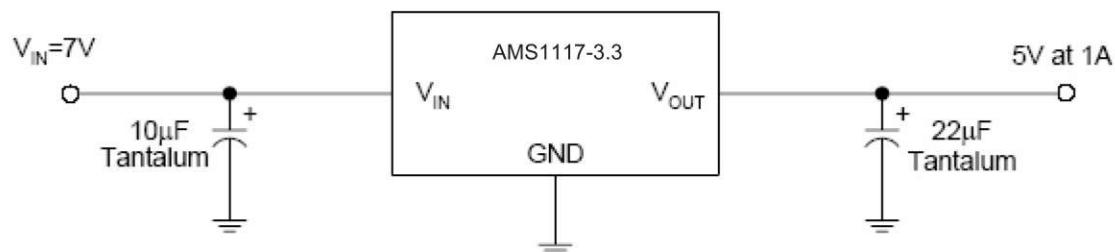

SHIKE MAKE CONSCIOUS PRODUCT

CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE

REV.07

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LDO Voltage Regulators category:

Click to view products by Shikues manufacturer:

Other Similar products are found below :

[AP7363-SP-13](#) [L79M05TL-E](#) [AP7362-HA-7](#) [PT7M8202B12TA5EX](#) [TCR3DF185,LM\(CT\)](#) [TCR3DF45,LM\(CT\)](#) [TLE4473G V52](#) [059985X](#)
[NCP4687DH15T1G](#) [701326R](#) [NCV8170AXV250T2G](#) [AP7315-25W5-7](#) [AP2111H-1.2TRG1](#) [ZLDO1117QK50TC](#) [AZ1117ID-ADJTRG1](#)
[TCR3DG12,LF](#) [MIC5514-3.3YMT-T5](#) [SCD7912BTG](#) [NCP154MX180270TAG](#) [SCD33269T-5.0G](#) [NCV8170BXV330T2G](#)
[NCV8170BMX330TCG](#) [NCV8170AMX120TCG](#) [NCP706ABMX300TAG](#) [NCP153MX330180TCG](#) [NCP114BMX075TCG](#) [MC33269T-3.5G](#)
[CAT6243-ADJCMT5T](#) [TCR3DG33,LF](#) [TCR4DG35,LF](#) [TAR5S15U\(TE85L,F\)](#) [TAR5S18U\(TE85L,F\)](#) [TCR3UG19A,LF](#) [TCR4DG105,LF](#)
[MPQ2013AGG-5-P](#) [NCV8170AMX360TCG](#) [TLE4268GSXUMA2](#) [NCP715SQ15T2G](#) [MIC5317-3.0YD5-T5](#) [NCV563SQ18T1G](#)
[NCP715MX30TBG](#) [NCV8702MX25TCG](#) [NCV8170BXV120T2G](#) [MIC5317-1.2YD5-T5](#) [NCV8170AMX150TCG](#) [NCV8170BMX150TCG](#)
[AP2213D-3.3TRG1](#) [NCV8170BMX120TCG](#) [NCV8170BMX310TCG](#) [NCV8170BMX360TCG](#)