

## Silicon Bidirectional Trigger Diodes


### FEATURES

These diacs are intended for use in thyristor phase control circuits for lamp-dimming, universal-motor speed controls, and heat controls.

### MECHANICAL DATA

Case: SOD-123

Terminals: Solderable per MIL-STD-750, Method 2026

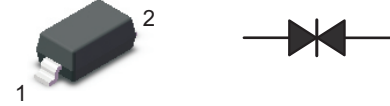

Top View

Simplified outline SOD-123 and symbol

### Absolute Maximum Ratings (Ta = 25°C)

Parameter	Symbol	Value	Unit
Power Dissipation (T <sub>c</sub> = 100°C)	P <sub>tot</sub>	150	mW
Repetitive Peak On-state Current (tp = 20 μs, f = 100 Hz)	I <sub>TRM</sub>	2	A
Operating Junction and Storage Temperature Range	T <sub>j</sub> , T <sub>stg</sub>	- 40 to + 125	°C

### Characteristics at Ta = 25°C

Parameter		Symbol	Min.	Max.	Unit
Breakover Voltage at C = 22 nF, see diagram 1	DB3T	V <sub>BO</sub>	28	36	V
	DC34T		30	38	V
	DB4T		35	45	V
Breakover Voltage Symmetry at C = 22 nF, see diagram 1		[ +V <sub>BO</sub>   -  -V <sub>BO</sub>  ]	—	3	V
Dynamic Breakover Voltage at ΔI = [I <sub>BO</sub> to I <sub>F</sub> = 10 mA]		ΔV <sub>±</sub>	5	—	V
Output Voltage See diagram 2		V <sub>O</sub>	5	—	V
Breakover Current at C = 22 nF		I <sub>BO</sub>	—	50	μA
Leakage Current at V <sub>B</sub> = 0.5V <sub>BOmax</sub>		I <sub>B</sub>	—	10	μA
Rise Time See diagram 3		t <sub>r</sub>	—	2	μs

Diagram1: current-voltage characteristic

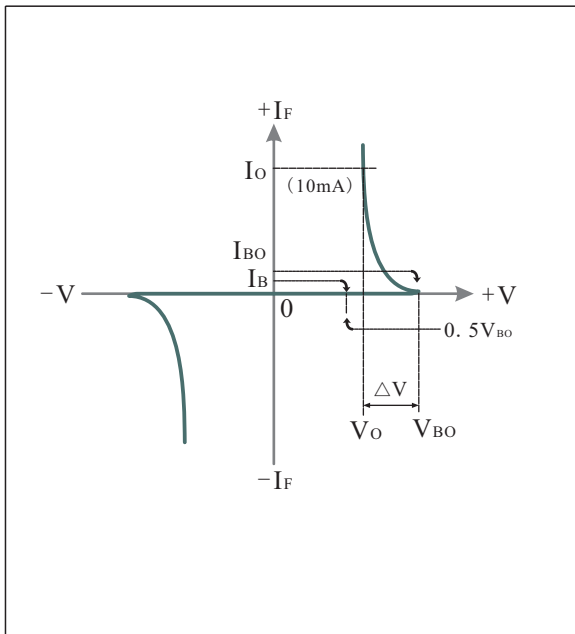


Diagram2: Test circuit for output voltage

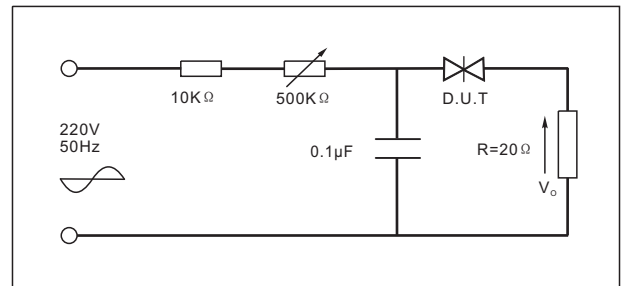


Diagram3: Test circuit see Fig.2. Adjust R for  $I_p=0.5A$

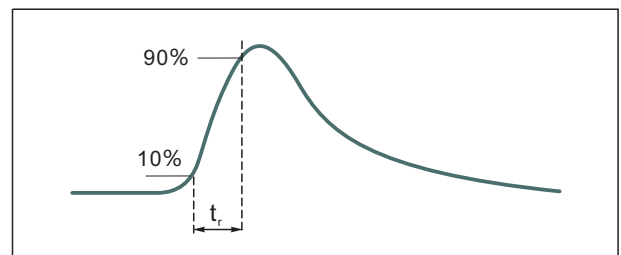


Fig.1: Power dissipation versus ambient temperature(maximum values)

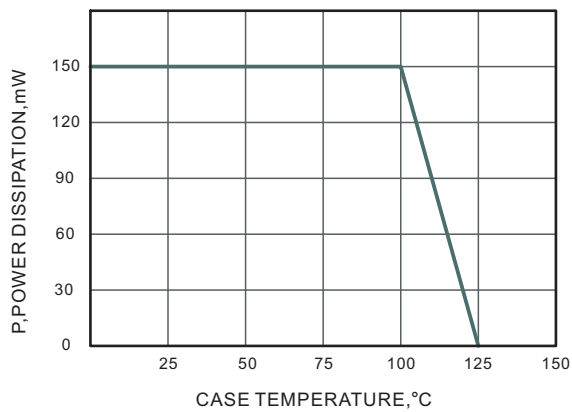


Fig.2: Power dissipation versus ambient temperature(maximum values)


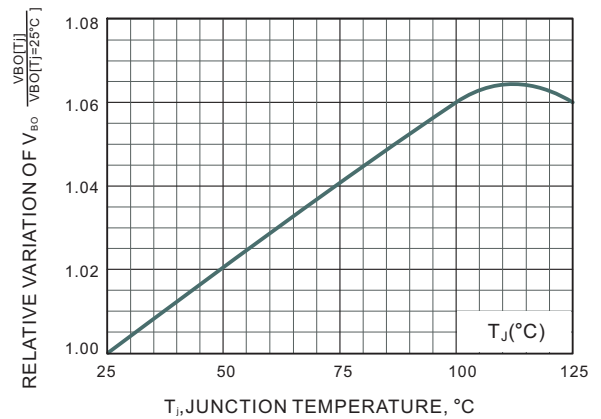



Fig.3: Power dissipation versus ambient temperature(maximum values)

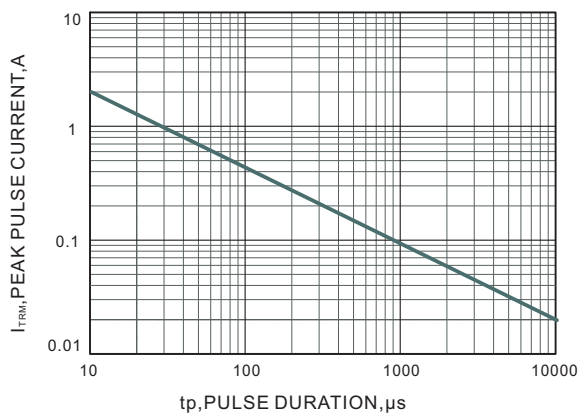

## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads


SOD-123

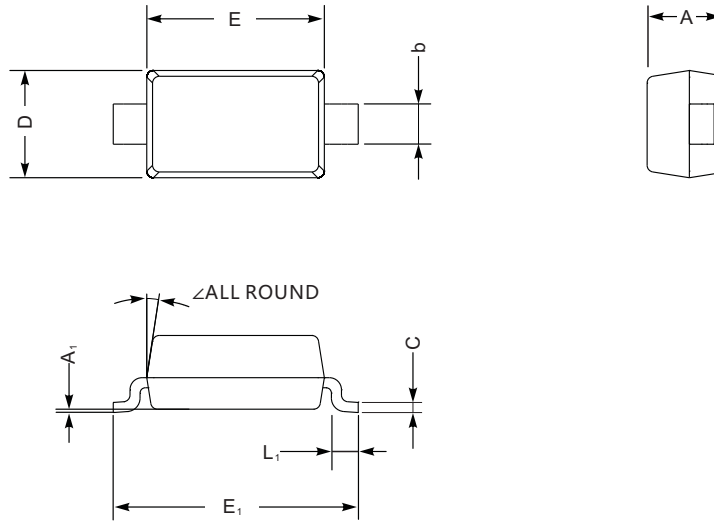

SOD-123 mechanical data

UNIT		A	C	D	E	E <sub>1</sub>	L <sub>1</sub>	b	A <sub>1</sub>	∠
mm	max	1.3	0.22	1.8	2.8	3.9	0.45	0.7	0.2	9°
	min	0.9	0.09	1.5	2.5	3.6	0.25	0.5	—	
mil	max	51	8.7	71	110	154	18	28	8	
	min	35	3.5	59	98	142	10	20	—	

### The recommended mounting pad size

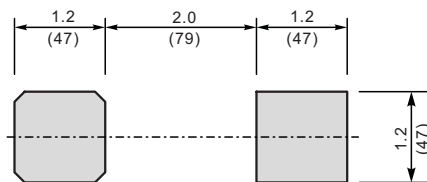

Unit:  $\frac{\text{mm}}{(\text{mil})}$

### Marking

Type number	Marking code
DB3T	DB3
DC34T	DC34
DB4T	DB4

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Diacs](#) category:*

*Click to view products by [Shikues](#) manufacturer:*

Other Similar products are found below :

[2SC2983](#) [BEP0080SB](#) [BEP0300SC](#) [BEP3500SB](#) [DB3](#) [DB3](#) [DB3](#) [DB3](#) [DB3TG](#) [DB3-TP](#) [DB3W](#) [DB4](#) [DB4](#) [DB4](#) [DB4](#) [DC34](#) [DLDB3](#)  
[DLDB4](#) [K1050E70](#) [K1100E70](#) [K1200E70](#) [K1400E70](#) [K1500E70](#) [K2000E70](#) [K2200E70](#) [K2200G](#) [K2400G](#) [LLDB3](#) [LLDB3](#) [NTE6407](#)  
[NTE6408](#) [NTE6411](#) [NTE6412](#) [P0080EAL](#) [P0080SBLRP](#) [P0720ECLRP1](#) [P1500SALRP](#) [P2600EAL](#) [P2600EBL](#) [P3100SCLRP](#) [P3203ABL](#)  
[P3500SBLRP](#) [P4500SCLRP](#) [SDP0240T023G6RP](#) [SMDB3](#) [SODDB3](#) [SODDB3T](#) [RHG](#) [TISP4350H3BJR-S](#) [TMMDB3](#) [TMMDB3TG](#)