


•Feature

-16V/-3A, R_{DS(ON)} = 160m Ω (MAX) @V_{GS} = -4.5V.
 R_{DS(ON)} = 240m Ω (MAX) @V_{GS} = -2.5V.

Super High dense cell design for extremely low R_{DS(ON)}

Reliable and Rugged

SOT-23 for Surface Mount Package

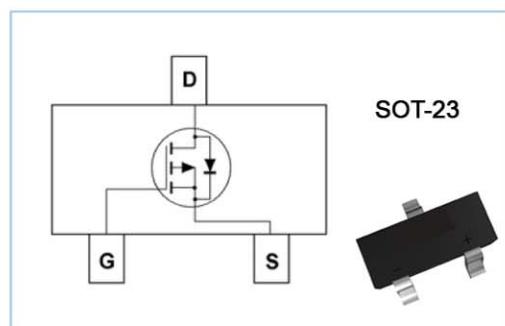
•Applications

Power Management

Portable Equipment and Battery Powered Systems.

•Absolute Maximum Ratings

T_A=25°C Unless Otherwise noted

Parameter	Symbol	Limit	Units
Drain-Source Voltage	V _{DS}	-16	V
Gate-Source Voltage	V _{GS}	±8	V
Drain Current-Continuous	I _D	-3	A

•Electrical Characteristics

T_A=25°C Unless Otherwise noted

Parameter	Symbol	Test Conditions	Min	Typ.	Max	Units
Off Characteristics						
Drain to Source Breakdown Voltage	BVDSS	V _{GS} =0V, I _D =-250μA	-16	-	-	V
Zero-Gate Voltage Drain Current	IDSS	V _{DS} =-12V, V _{GS} =0V	-	-	-5	μA
Gate Body Leakage Current, Forward	IGSSF	V _{GS} =8V, V _{DS} =0V	-	-	100	nA
Gate Body Leakage Current, Reverse	IGSSR	V _{GS} =-8V, V _{DS} =0V	-	-	-100	nA
On Characteristics						
Gate Threshold Voltage	V _{GS(th)}	V _{GS} = V _{DS} , I _D =-250μA	-0.45	-	-1.5	V
Static Drain-source On-Resistance	R _{DS(ON)}	V _{GS} =-4.5V, I _D =-3.0A	-	-	160	mΩ
		V _{GS} =-2.5V, I _D =-2.0A	-	-	240	mΩ
Drain-Source Diode Characteristics and Maximum Ratings						
Drain-Source Diode Forward Voltage	V _{SD}	V _{GS} =0V, I _S =-1.25A			-1.8	V

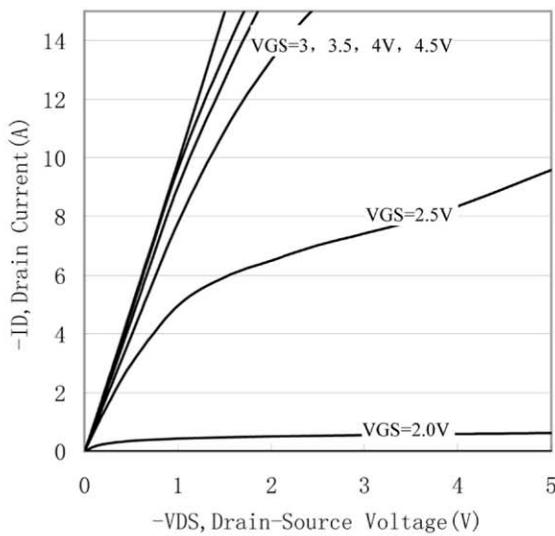


Figure 1. Output Characteristics

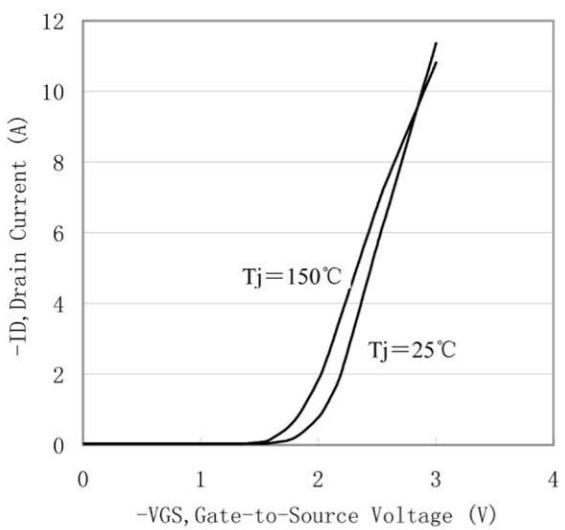


Figure 2. Transfer Characteristics

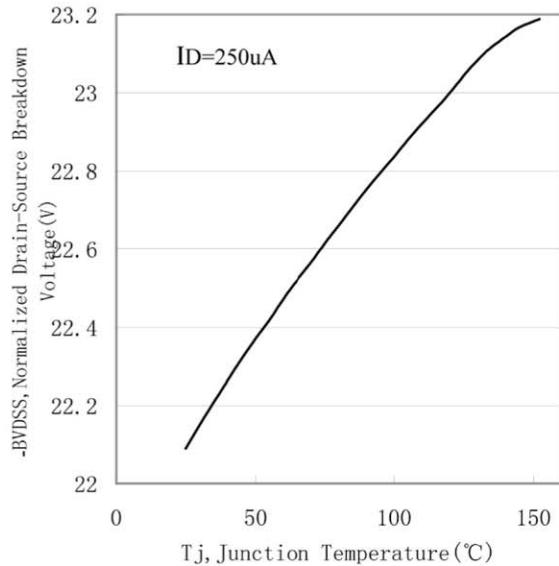


Figure 3. Breakdown Voltage Variation with Temperature

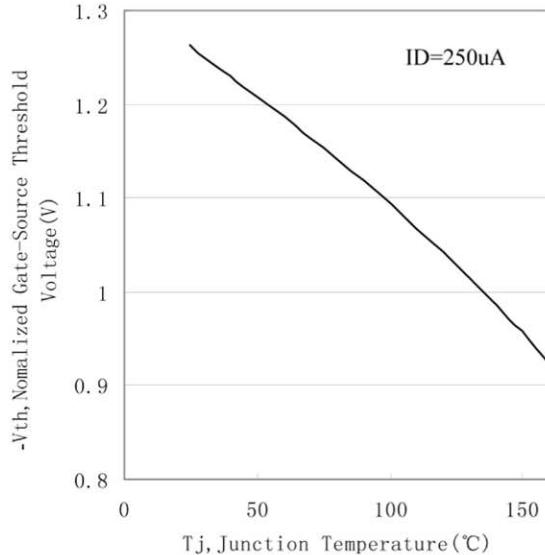


Figure 4. Gate Threshold Variation with Temperature

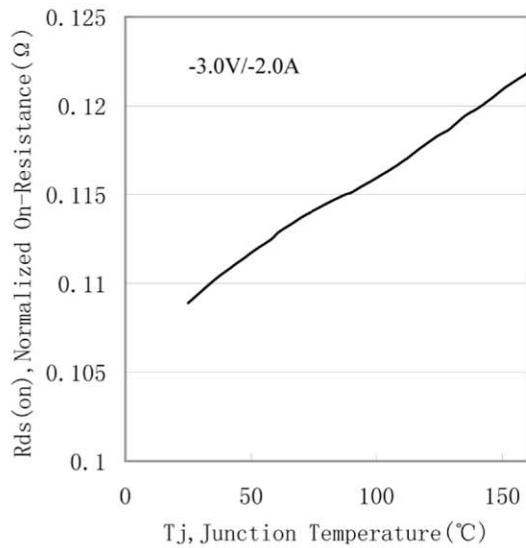


Figure 5. On-Resistance Variation with Temperature

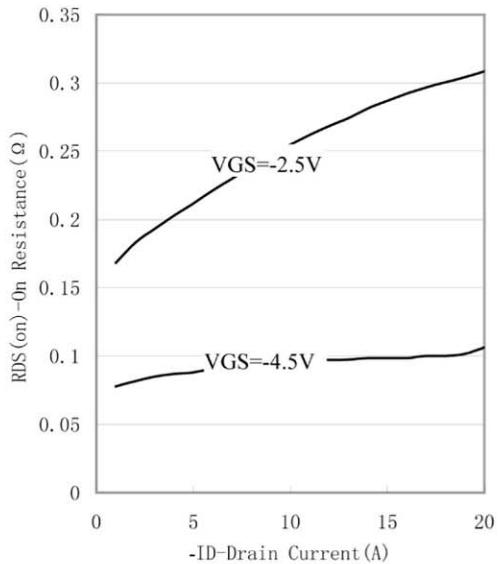


Figure 6. On-Resistance vs. Drain Current

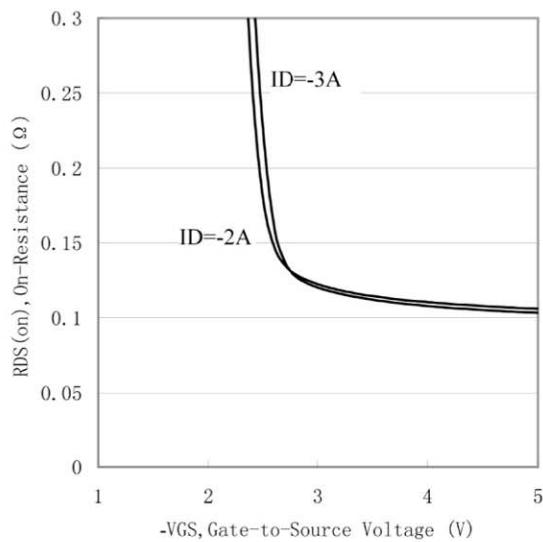


Figure 7. On-Resistance vs. Gate-to-Source Voltage

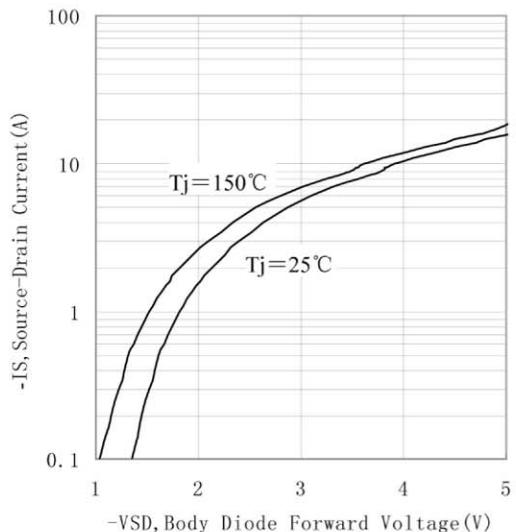


Figure 8. Source-Drain Diode Forward Voltage

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by Shikues manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)