


● DESCRIPTION

This device uses the Schottky Barrier principle with a large area metal-to-silicon power diode. Ideally suited for low voltage, high frequency rectification or as free wheeling and polarity protection diodes in surface mount applications where compact size and weight are critical to the system. This package also provides an easy to work with alternative to leadless 34 package style.

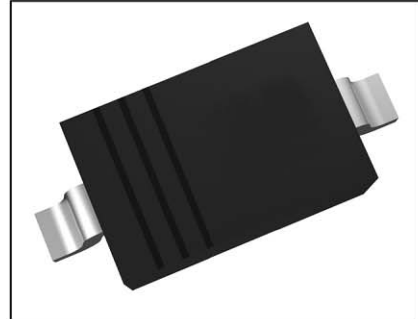

SOD-123

The MBR0530 is available in SOD-123 Package.

● FEATURES

- Guardring for Stress Protection
- Low Forward Voltage
- 125°C Operating Junction Temperature
- Epoxy Meets UL 94V-0 @ 0.125 in
- Package Designed for Optimal Automated Board Assembly
- ESD Ratings: Machine Model, C; Human Body Model, 3
- Available in SOD-123 Package

● ORDERING INFORMATION

| Package Type | Part Number |
|--|--------------------------------------|
| SOD-123 | MBR130-1 |
| Note | Package Q'ty/Reel 1=3,000pcs/Reel |
| AiT provides all RoHS Compliant Products | |

● APPLICATIONS

- Polarity Designator: Cathode Band
- Weight: 11.7 mg (approximately)
- Case: Epoxy, Molded
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds



● ABSOLUTE MAXIMUM RATINGS

| | |
|---|---|
| V_{RRM} , Peak Repetitive Reverse Voltage | 30V |
| V_{RWM} , Working Peak Reverse Voltage | 30V |
| V_R , DC Blocking Voltage | 30V |
| $I_{F(AV)}$, Average Rectified Forward Current (Rated V_R) | $T_L = 65^\circ\text{C}$ 1.0A |
| I_{FSM} , Non-Repetitive Peak Surge Current (Surge Applied at Rated Load Conditions Halfwave, Single Phase, 60 Hz) | 5.5A |
| T_{stg} , Storage Temperature Range | -65°C to $+125^\circ\text{C}$ |
| T_J , Operating Junction Temperature | -65°C to $+125^\circ\text{C}$ |
| dv/dt , Voltage Rate of Change (Rated V_R) | 1000V/ μs |

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

● THERMAL CHARACTERISTICS

| Parameter Symbol | Symbol | Value | Unit |
|--|-----------------|-------|---------------------------|
| Thermal Resistance, Junction to Ambient ^{NOTE1} | $R_{\theta JA}$ | 230 | $^\circ\text{C}/\text{W}$ |
| Thermal Resistance, Junction to Lead ^{NOTE1} | $R_{\theta JL}$ | 108 | $^\circ\text{C}/\text{W}$ |

NOTE1. FR-4 or FR-5 = 3.5 × 1.5 inches using a 1 inch Cu pad.

● ELECTRICAL CHARACTERISTICS

| Parameter | Symbol | Conditions | Typ. | Max | Units |
|--|----------|---|------|------|---------------|
| Reverse Breakdown Voltage | V_{BR} | $I_R = 500\mu\text{A}$ | 30 | - | V |
| Maximum Instantaneous Forward Voltage ^{NOTE2} | V_F | $I_F = 0.1\text{A}, T_J = 25^\circ\text{C}$ | - | 0.35 | V |
| | | $I_F = 0.7\text{A}, T_J = 25^\circ\text{C}$ | - | 0.45 | |
| | | $I_F = 1.0\text{A}, T_J = 25^\circ\text{C}$ | 0.47 | - | |
| Maximum Instantaneous Reverse Current ^{NOTE2} | I_R | Rated DC Voltage, $T_C = 25^\circ\text{C}$ | 60 | 60 | μA |
| | | $V_R = 5\text{V}, T_C = 25^\circ\text{C}$ | 10 | 10 | μA |

NOTE2. Pulse Test: Pulse Width = 300 μs , Duty Cycle \leq 2%.



● TYPICAL CHARACTERISTICS

Figure 1. Maximum Forward Voltage

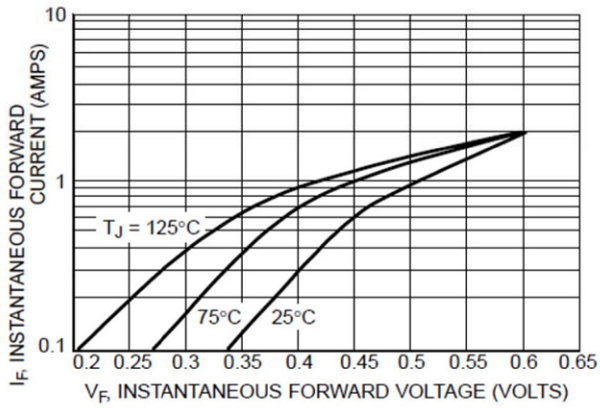


Figure 2. Typical Forward Voltage

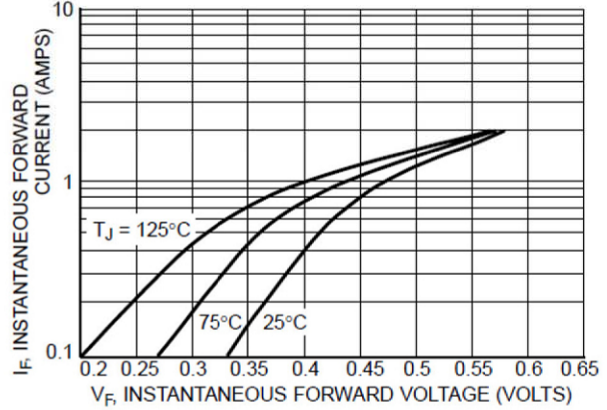


Figure 3. Typical Reverse Current

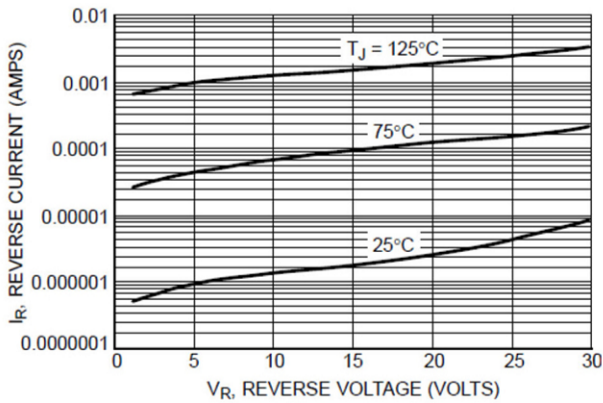


Figure 4. Typical Capacitance

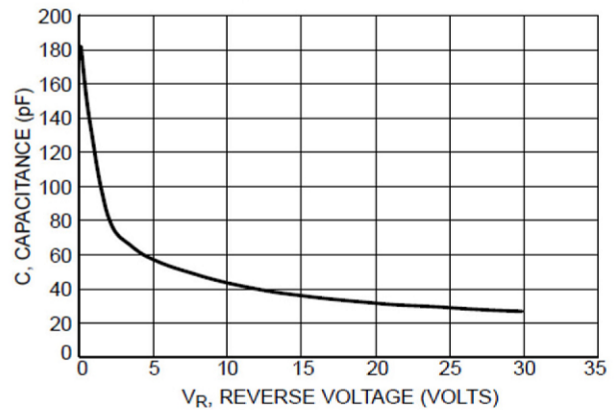


Figure 5. Current Derating, Lead, $R_{\theta JL} = 108^{\circ}\text{C}/\text{W}$



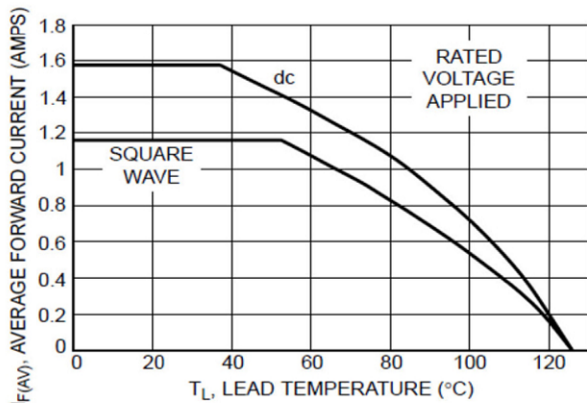


Figure 6. Forward Power Dissipation

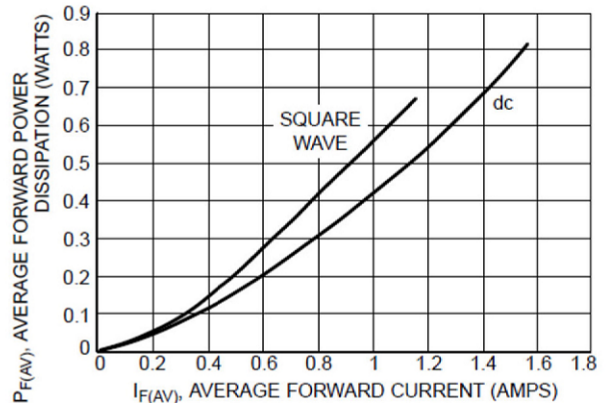

● PACKAGE INFORMATION

Dimension in SOD-123 Package (Unit: mm)

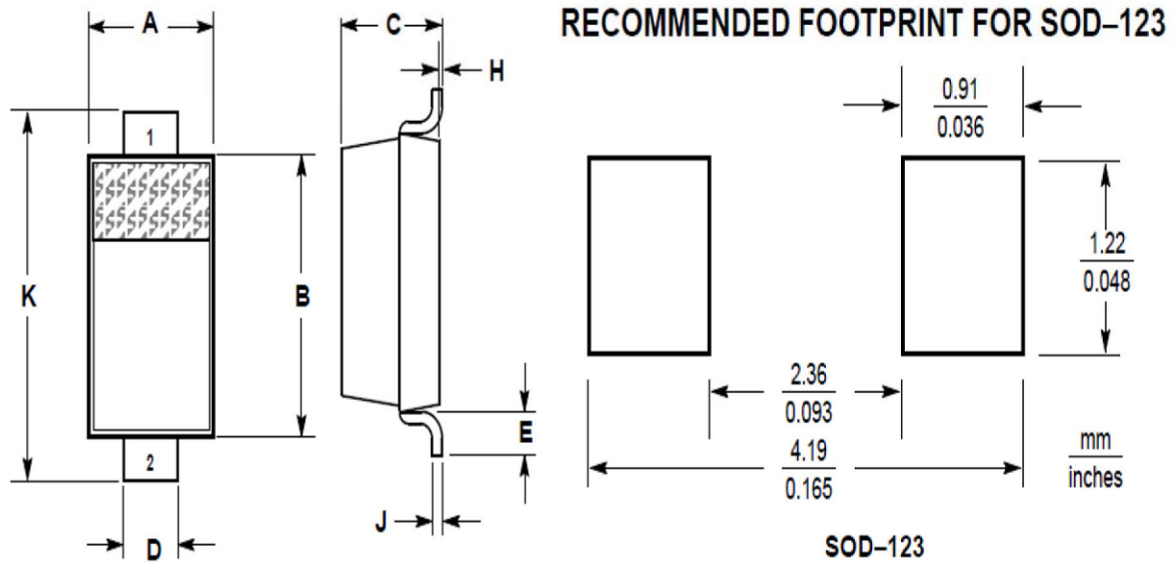

| DIM | INCHES | | MILLIMETERS | |
|-----|--------|-------|-------------|------|
| | MIN | MAX | MIN | MAX |
| A | 0.055 | 0.071 | 1.40 | 1.80 |
| B | 0.100 | 0.112 | 2.55 | 2.85 |
| C | 0.037 | 0.053 | 0.95 | 1.35 |
| D | 0.020 | 0.028 | 0.50 | 0.70 |
| E | 0.004 | - | 0.25 | - |
| H | 0.000 | 0.004 | 0.00 | 0.10 |
| J | - | 0.006 | - | 0.15 |
| K | 0.140 | 0.152 | 3.55 | 3.85 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Shikues](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS 3010S-02LRH E6327](#)
[BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#)
[SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#)
[MA4E2501L-1290](#) [MBRB30H30CT-1G](#) [BAS 70-02L E6327](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK32A-](#)
[TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#)
[CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#)
[CDBQC0530L-HF](#) [BAT54-13-F](#) [ACDBA340-HF](#)