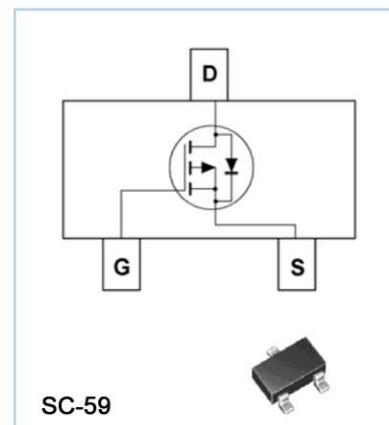


**P-Channel Enhancement Mode MOSFET  
Feature**

- -30V/-4.2A,  $R_{DS(ON)} = 130\text{m}\Omega$  (MAX) @ $V_{GS} = -10\text{V}$ .  
 $R_{DS(ON)} = 150\text{m}\Omega$  (MAX) @ $V_{GS} = -4.5\text{V}$ .  
 $R_{DS(ON)} = 180\text{m}\Omega$  (MAX) @ $V_{GS} = -2.5\text{V}$ .
- Super High dense cell design for extremely low  $R_{DS(ON)}$
- Reliable and Rugged
- SC-59 for Surface Mount Package


**Applications**

- Power Management  
Portable Equipment and Battery Powered Systems.

**Absolute Maximum Ratings**
 $T_A = 25^\circ\text{C}$  Unless Otherwise noted

Parameter	Symbol	Limit	Units
Drain-Source Voltage	$V_{DS}$	-30	V
Gate-Source Voltage	$V_{GS}$	$\pm 12$	V
Drain Current-Continuous	$I_D$	-4.2	A

**Electrical Characteristics**
 $T_A = 25^\circ\text{C}$  Unless Otherwise noted

Parameter	Symbol	Test Conditions	Min	Typ.	Max	Units
<b>Off Characteristics</b>						
Drain to Source Breakdown Voltage	BVDSS	$V_{GS}=0\text{V}$ , $I_D=-250\mu\text{A}$	-30	-	-	V
Zero-Gate Voltage Drain Current	IDSS	$V_{DS}=-24\text{V}$ , $V_{GS}=0\text{V}$	-	-	-1	$\mu\text{A}$
Gate Body Leakage Current, Forward	IGSSF	$V_{GS}=12\text{V}$ , $V_{DS}=0\text{V}$	-	-	100	nA
Gate Body Leakage Current, Reverse	IGSSR	$V_{GS}=-12\text{V}$ , $V_{DS}=0\text{V}$	-	-	-100	nA
<b>On Characteristics</b>						
Gate Threshold Voltage	$V_{GS(\text{th})}$	$V_{GS}=V_{DS}$ , $I_D=-250\mu\text{A}$	-0.7	-	-1.3	V
Static Drain-source On-Resistance	RDS(ON)	$V_{GS}=-10\text{V}$ , $I_D=-4.2\text{A}$	-	-	130	$\text{m}\Omega$
		$V_{GS}=-4.5\text{V}$ , $I_D=-4.0\text{A}$	-	-	150	$\text{m}\Omega$
		$V_{GS}=-2.5\text{V}$ , $I_D=-1.0\text{A}$	-	-	180	$\text{m}\Omega$
<b>Drain-Source Diode Characteristics and Maximum Ratings</b>						
Drain-Source Diode Forward Voltage	VSD	$V_{GS}=0\text{V}$ , $I_S=-1.0\text{A}$			-1.0	V

## Typical Characteristics

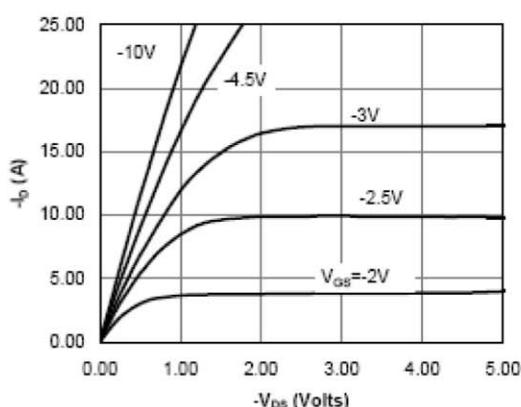


Fig 1: On-Region Characteristics

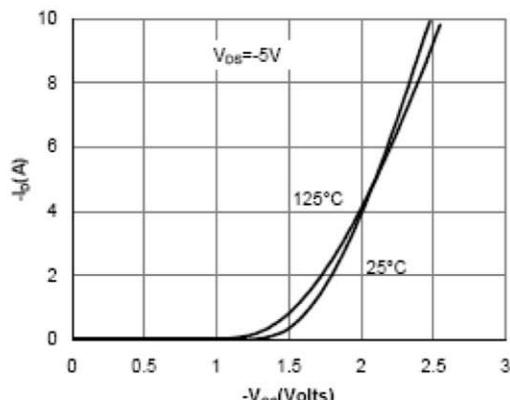


Figure 2: Transfer Characteristics

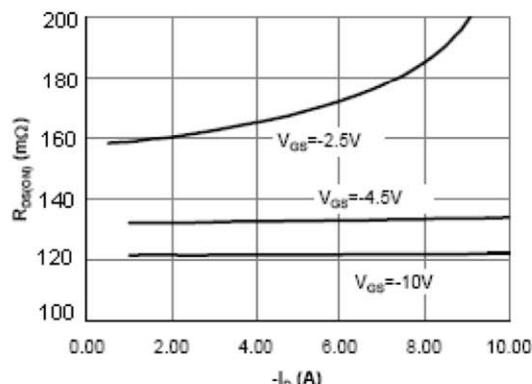


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

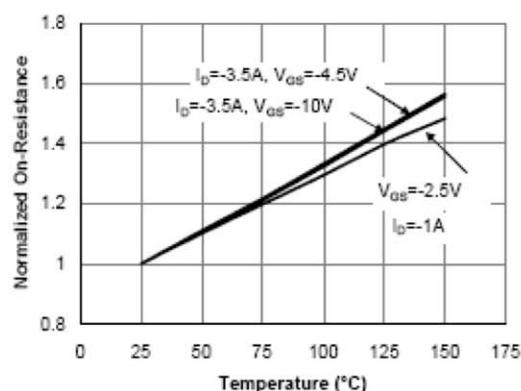


Figure 4: On-Resistance vs. Junction Temperature

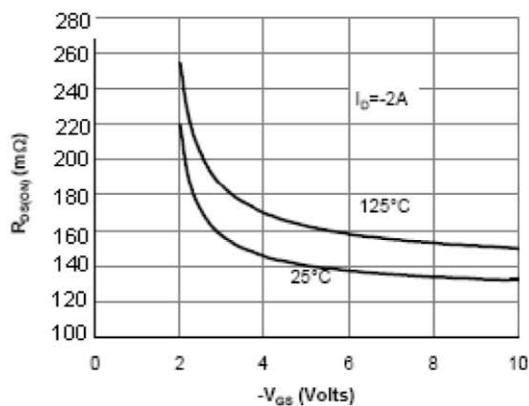


Figure 5: On-Resistance vs. Gate-Source Voltage

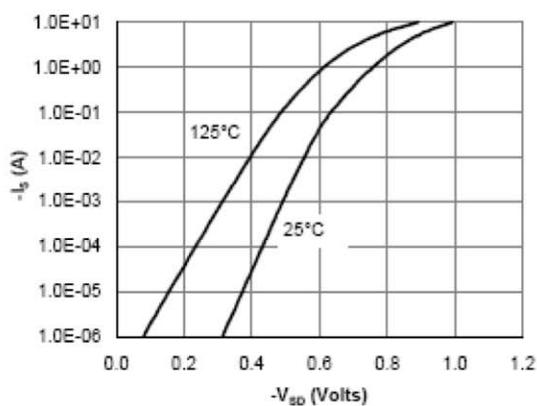


Figure 6: Body-Diode Characteristics

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for MOSFET category:***

***Click to view products by Shikues manufacturer:***

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#)  
[405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T\)](#) [751625C](#) [BSC884N03MS G](#) [BSF024N03LT3 G](#)  
[PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-](#)  
[7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#)  
[SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [STU5N65M6](#)  
[C3M0021120D](#) [DMN13M9UCA6-7](#) [BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#) [IRF40SC240ARMA1](#)  
[IPS60R1K0PFD7SAKMA1](#)