

# US5ACG THRU US5MCG

## Surface Mount Ultrafast Recovery Rectifier

Reverse Voltage – 50~1000 V Forward Current – 5 A

### FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Superfast reverse recovery time
- Lead free in comply with EU RoHS 2011/65/EU directives

### MECHANICAL DATA


- Case: SMC
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 217mg / 0.0077oz

### Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

PINNING	
PIN	DESCRIPTION
1	Cathode
2	Anode


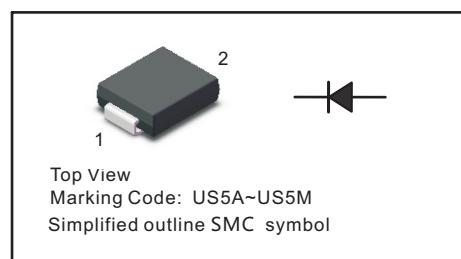


Parameter	Symbols	US5ACG	US5BCG	US5DCG	US5GCG	US5JCG	US5KCG	US5MCG	Units					
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V					
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V					
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V					
Maximum Average Forward Rectified Current at T <sub>c</sub> = 100 °C	I <sub>F(AV)</sub>	5							A					
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I <sub>FSM</sub>	120							A					
Maximum Instantaneous Forward Voltage at 5 A	V <sub>F</sub>	1.0		1.3		1.65		V						
Maximum DC Reverse Current T <sub>a</sub> = 25 °C at Rated DC Blocking Voltage T <sub>a</sub> = 125 °C	I <sub>R</sub>	5 100							µA					
Typical Junction Capacitance at V <sub>R</sub> =4V, f=1MHz	C <sub>j</sub>	50							pF					
Maximum Reverse Recovery Time <sup>(1)</sup>	t <sub>rr</sub>	50			75			ns						
Typical Thermal Resistance <sup>(2)</sup>	R <sub>θJA</sub>	35							°C/W					
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>stg</sub>	-55 ~ +150							°C					



( 1 ) Measured with I<sub>F</sub> = 0.5 A, I<sub>R</sub> = 1 A, I<sub>rr</sub> = 0.25 A.

( 2 ) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.


**Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram**

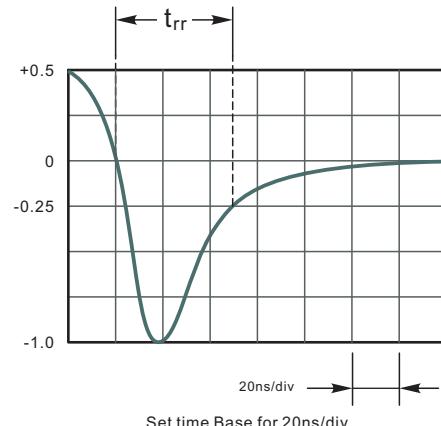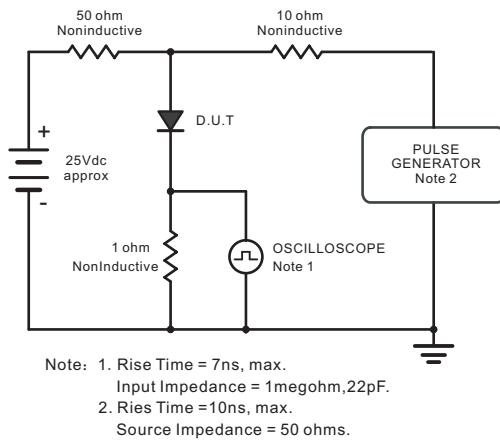

**Fig.2 Maximum Average Forward Current Rating**

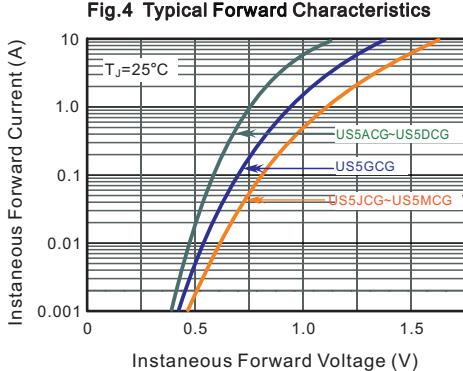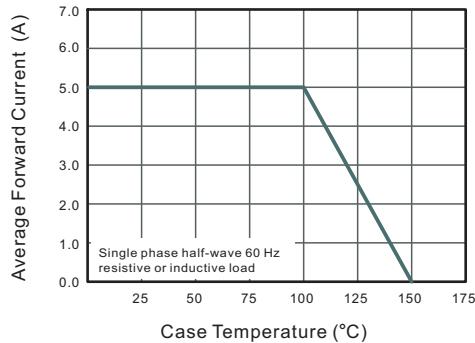


**Fig.4 Typical Forward Characteristics**

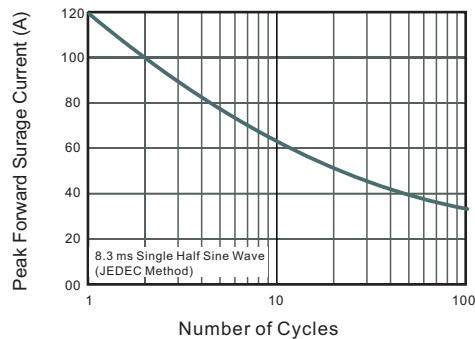


**Fig.6 Maximum Non-Repetitive Peak Forward Surge Current**

**Fig.3 Typical Reverse Characteristics**

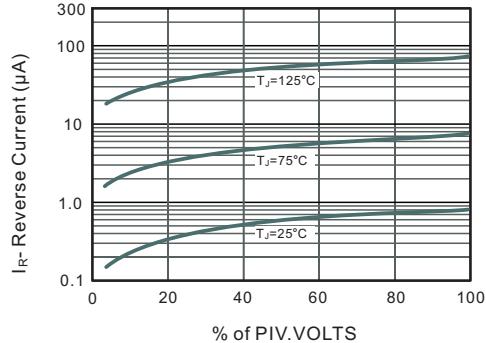



**Fig.5 Typical Junction Capacitance**

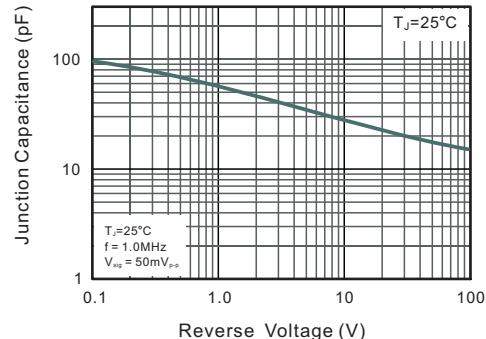

## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads


SMC

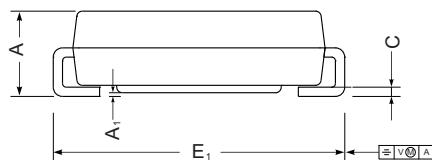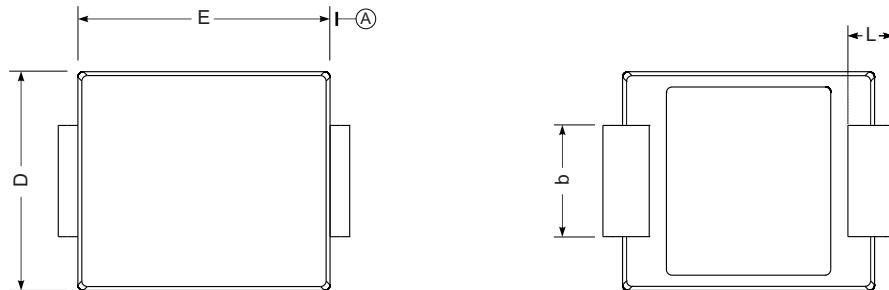

SMC mechanical data

UNIT		A	E	D	E <sub>1</sub>	A <sub>1</sub>	C	L	b
mm	max	2.62	7.0	6.2	8.0	0.21	0.31	1.6	3.25
	min	2.00	6.5	5.6	7.6	0.05	0.15	0.9	2.75
mil	max	103	276	244	315	8.3	12	63	128
	min	79	256	220	299	2.0	5.9	35	108

## The recommended mounting pad size

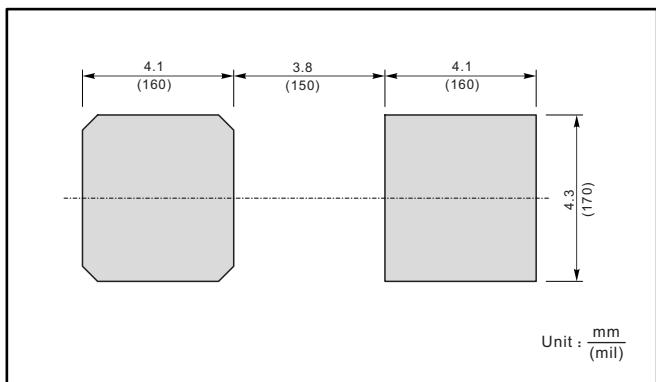

## Marking

Type number	Marking code
US5ACG	US5A
US5BCG	US5B
US5DCG	US5D
US5GCG	US5G
US5JCG	US5J
US5KCG	US5K
US5MCG	US5M

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Rectifiers category:***

***Click to view products by Shikues manufacturer:***

Other Similar products are found below :

[70HFR40](#) [FR105 R0](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [1N4002G](#) [1N4005-TR](#) [UFS120Je3/TR13](#) [JANS1N6640US](#) [481235F](#)  
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T110HF60](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS12\(T5L,TEMQ\)](#) [ACGRB207-HF](#)  
[CLH07\(TE16L,Q\)](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [85HFR60](#) [40HFR60](#) [70HF120](#) [85HFR80](#)  
[D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SDHD5K](#) [ACGRA4001-HF](#) [ACURA107-HF](#) [D1821SH45T PR](#) [D1251S45T](#)  
[NTE6358](#) [NTE5850](#) [NTE5819](#) [NTE5837](#) [NTE5892](#) [NTE5900](#) [NTE5911](#) [NTE5915](#) [NTE5921](#)