

# S1 RELAY

## SHORI

### ◆ Features

- S1 Relay Performs high reliability in dry circuit.
- Low current and low profile miniature PCB relay.
- Fine Ag contacts with rating 1A and 3A.
- Plastic sealed and flow solder types are available.
- UL/CUL approval.



### ◆ Coil Data [at 20°C]

- Standard Type

Rated voltage (V)	Coil Resistance ±10% (Ω)	Rated Current ±10% (mA)	Pick up Voltage (Max)	Drop out Voltage (Min)	Max continuous Voltage	Power consumption At rated Voltage
3	20	150	75% of rated voltage	5% of rated voltage	130% Max of Rated voltage	Approx.0.45W
5	56	90				
6	80	75				
9	180	50				
12	320	37.5				
24	1280	18.8				
48	5120	9.3				

- High sensitivity Type

Rated voltage (V)	Coil Resistance ±10% (Ω)	Rated Current ±10% (mA)	Pick up Voltage (Max)	Drop out Voltage (Min)	Max continuous Voltage	Power consumption At rated Voltage
3	45	66.7	75% of rated voltage	5% of rated voltage	130% Max of Rated voltage	Approx.0.2W
5	125	40				
6	180	33.3				
9	400	22.5				
12	700	17				
24	2800	8.6				

### ◆ Contact Rating

Resistive load	1A/120VAC, 2A/24VDC
----------------	---------------------

### ◆ Type List

Terminal style	Contact form	Type	Designation(provided with)	
			Sealed type	Sealed type washable
PCB terminal	1C(SPDT)	Standard	S1-12	S1-12-S
	1C(SPDT)	High sensitivity	S1-12B	S1-12B-S

### ◆ Ordering information

S1 - 12 B - S  
 1        2 3        4

1. S1 -- Basic series designation  
 3. B -- High sensitivity Type  
       Blank: Standard Type

2. 12 -- Coil Voltage (3V~48V)  
 4. S -- Sealed type washable  
       Blank-- Sealed type

### ◆ Specification

Contact material	Ag Alloy	
Contact resistance	100 mΩ Max	
Operate time	10 ms Max	
Release time	5 ms Max	
Insulation resistance	100 MΩ Min. (DC 500V)	
Dielectric strength	Between open contact : AC 500V ,50/60Hz 1 min.	
	Between contact and coil : AC 1000V, 50/60Hz 1 min.	
Vibration resistance	Operating extremes	10~50Hz, amplitude 1.5 mm
	Damage limits	10~50Hz, amplitude 1.5 mm
Shock resistance	Operating extremes	10G
	Damage limits	100G
Life expectancy	Mechanical	10,000,000 operations (frequency 18,000 operations/hr)
	Electrical	100,000 operations (frequency 1,800 operations/hr)
Operating ambient temperature	Standard Type(-25~+55°C),High sensitivity Type(-25~75°C)	
Weight	Approx 3.5 g	

### ◆ Safety Approval

Certified	UL/CUL
File No.	E188091

### ◆ Safety Approval Rating


UL/CUL
1A 120VAC
2A 24VDC

# S1 RELAY

## SHORI


---

### ◆ Outline Dimension

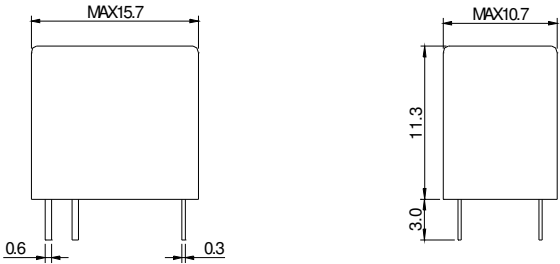


### ◆ Wiring Diagram

BOTTOM VIEW







### ◆ PC BOARD LAYOUT

BOTTOM VIEW



◆ Engineering Data

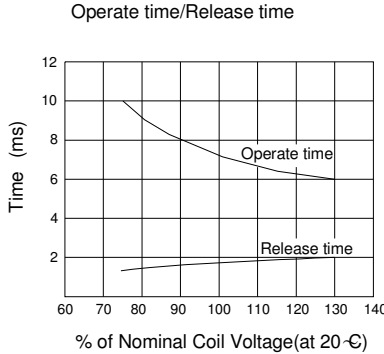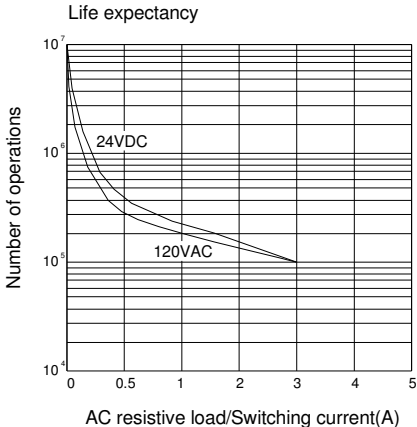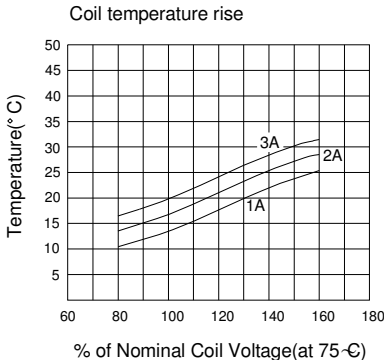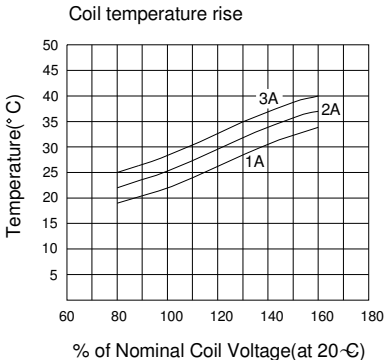

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [General Purpose Relays](#) category:*

*Click to view products by [Shori](#) manufacturer:*

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)  
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)  
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)  
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)  
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)  
[7-1393144-5](#) [7-1393767-8](#)