


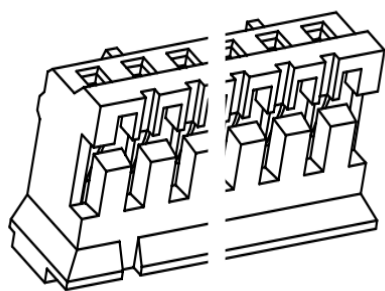
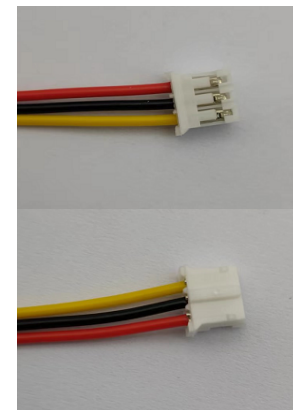



2.0-3P DT 200mm 26AWG

2.0 mm×3P插头, UL1007, 80 ,26AWG, 线长200mm (1端插头, 另一端剥皮镀锡2mm)

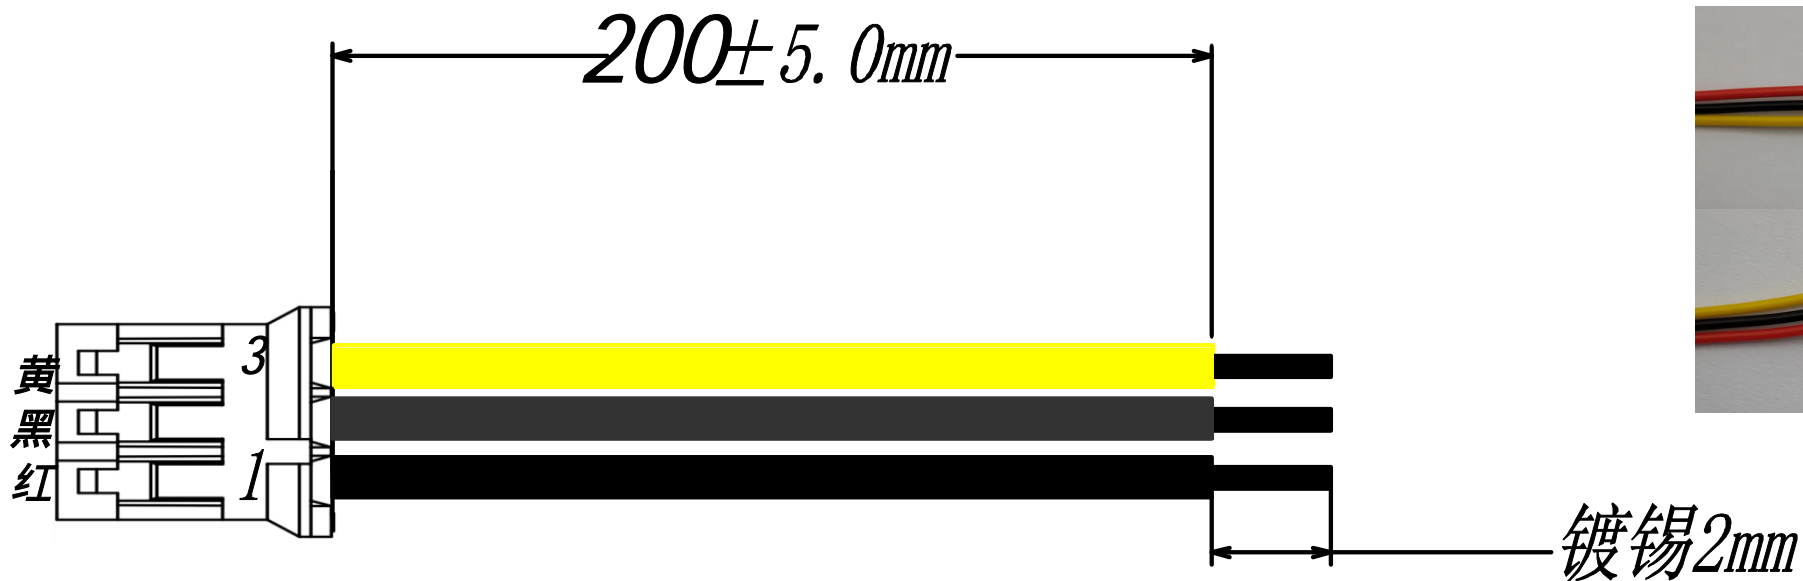

- 1. 极数 poles: 2 to 20P
- 2. 额定电流 Current rating: 2.0A AC, DC
- 3. 额定电压 Voltage rating: 100V AC, DC
- 4. 温度范围 Temperature range: -25. C to +85. C
- 5. 接触电阻 Contact resistance: $\leq 10m\Omega$
- 6. 绝缘电阻 Insulation resistance: $\geq 1000m\Omega$
- 7. 耐电压 Withstand voltage: 800V AC/minute
- 8. 适用线规 Applicable Wire: AWG #26
- 9. 适用基板厚度 Applicable PC board thickness: 1.6mm

 深圳市首韩科技有限公司	
日期: 2020-6-15	元件名称: 2.0-3P DT 200mm 26AWG
绘制: 李耀凤	
审核: 钟华华	
批准: 罗家金	
尺寸单位: mm	
第 1 页 共 1 页	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC / FPC Jumper Cables](#) category:

Click to view products by [SHOU](#) manufacturer:

Other Similar products are found below :

[8-1474659-7](#) [FSK-21.5A-20](#) [FSK-23A](#) [FSN-14.5A-6](#) [1474494-5](#) [1557385-1](#) [2-1437211-4](#) [2-6447164-4](#) [1-6437133-3](#) [FSK-21A](#) [FSN-21.5A-32](#) [FSN-24A](#) [2-1437181-9](#) [4-1437186-9](#) [4-1474659-8](#) [5-1474654-9](#) [6-6437158-0](#) [1474544-1](#) [7-6474640-3](#) [8-1474644-8](#) [FSK-22Z-12](#) [1437190-1](#) [2-6437158-6](#) [3-1437213-7](#) [FSK-11.25A-40](#) [FSN-11A-10](#) [FSP-22A](#) [FST-41B-5](#) [1-1437203-7](#) [6447164-6](#) [1474678-7](#) [3-1437219-8](#) [FSK-11.1A-40](#) [FSN-11.5A-3](#) [1437219-2](#) [05-001-152FB](#) [05-001.5-152FB](#) [7-1437166-1](#) [5-1474677-4](#) [3-1447175-2](#) [4-6447189-2](#) [15020-1538](#) [FSK-21.3A-25](#) [07-004.5-172-P](#) [JS05B-12P-030-3-4](#) [JS05A-16P-080-4-8](#) [JS05A-12P-050-3-4](#) [JS05A-16P-100-3-4](#) [JS05A-12P-100-3-4](#) [JS05A-12P-030-3-4](#)