


## Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Idea for printed circuit board
- ◆ Glass passivated Junction chip
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed 250°C/10 seconds at terminals

**SMAF**

RoHS  
COMPLIANT

Pb-Free

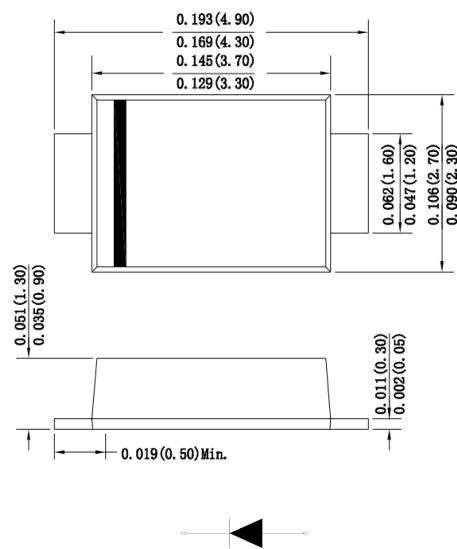

## Mechanical Data

**Case :** Molded plastic body

**Terminals :** Solder plated, solderable per MIL-STD-750, Method 2026

**Polarity :** Polarity symbol marking on body

**Mounting Position :** Any

**Weight :** 0.0014 ounce, 0.038 grams

Dimensions in inches and (millimeters)

## Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.


Parameter	SYMBOLS	RS2A	RS2B	RS2D	RS2G	RS2J	RS2K	RS2M	UNITS		
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V		
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V		
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V		
Maximum average forward rectified current at T <sub>L</sub> =100°C	I <sub>(AV)</sub>	2.0						A			
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I <sub>FSM</sub>	50.0						A			
Maximum instantaneous forward voltage at 2.0A	V <sub>F</sub>	1.30						V			
Maximum DC reverse current T <sub>A</sub> =25°C at rated DC blocking voltage T <sub>A</sub> =125°C	I <sub>R</sub>	5.0 500						uA			
Maximum reverse recovery time(Note 1)	T <sub>rr</sub>	150		250	500		ns				
Typical junction capacitance (Note2)	C <sub>J</sub>	50.0						pF			
Typical thermal resistance	R <sub>qJA</sub>	70.0						°C/W			
Operating junction and storage temperature range	T <sub>J,T<sub>STG</sub></sub>	-55 to +150						°C			

**Note:** 1.Reverse recovery time test condition: IF=0.5A IR=1.0A Irr=0.25A


2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

## Ratings And Characteristic Curves


**FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT**

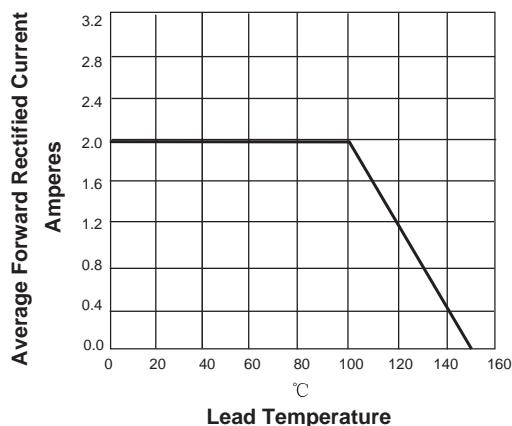


**FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PERLEG**

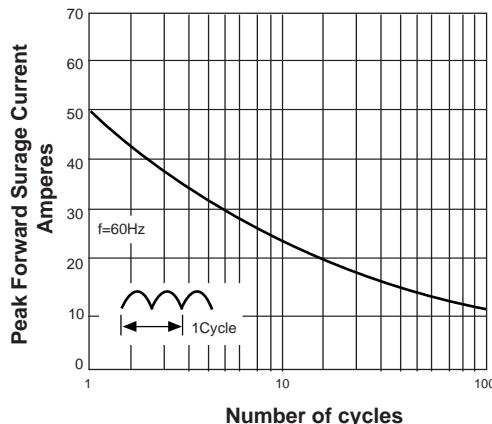


**FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS**

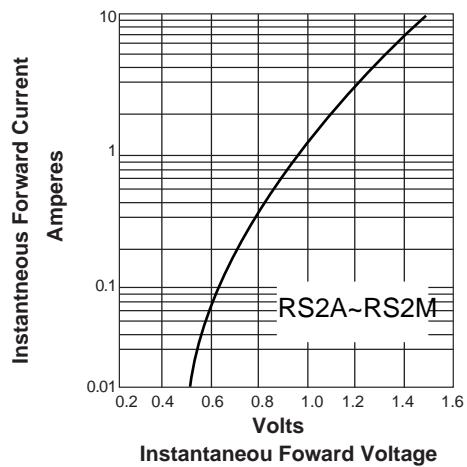

**FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS**

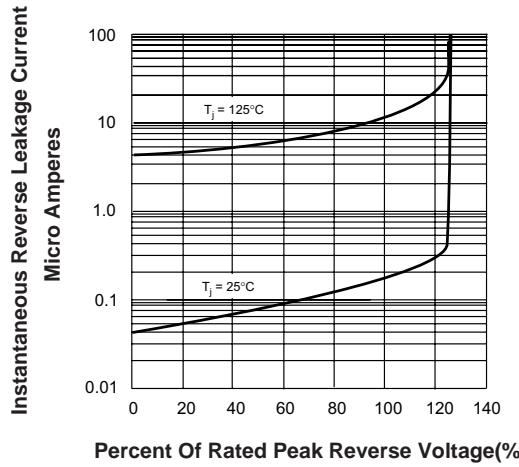

## Suggested Pad Layout

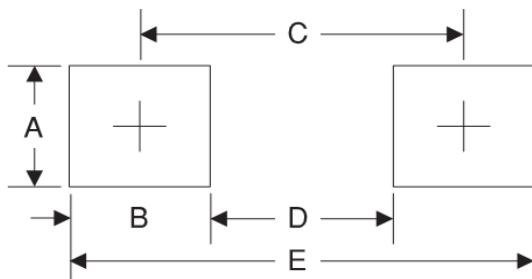

Symbol	Unit (mm)	Unit (inch)
A	1.68	0.066
B	1.52	0.060
C	3.90	0.154
D	2.00	0.078
E	5.10	0.200

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Rectifiers category:***

***Click to view products by ShunYe manufacturer:***

Other Similar products are found below :

[70HFR40](#) [FR105 R0](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [1N4002G](#) [1N4005-TR](#) [UFS120Je3/TR13](#) [JANS1N6640US](#) [481235F](#)  
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T110HF60](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS12\(T5L,TEMQ\)](#) [ACGRB207-HF](#)  
[CLH07\(TE16L,Q\)](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [85HFR60](#) [40HFR60](#) [70HF120](#) [85HFR80](#)  
[D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SDHD5K](#) [ACGRA4001-HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE6358](#)  
[NTE5850](#) [NTE5819](#) [NTE5837](#) [NTE5892](#) [NTE5900](#) [NTE5911](#) [NTE5915](#) [NTE5921](#) [NTE6104](#)