



Europa Part Ref: 70-007-33


Type
179021

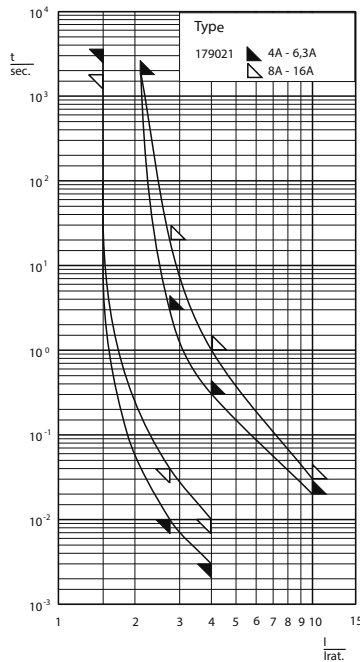

Zeit/Strom-Kennlinien
Time-Current Characteristics

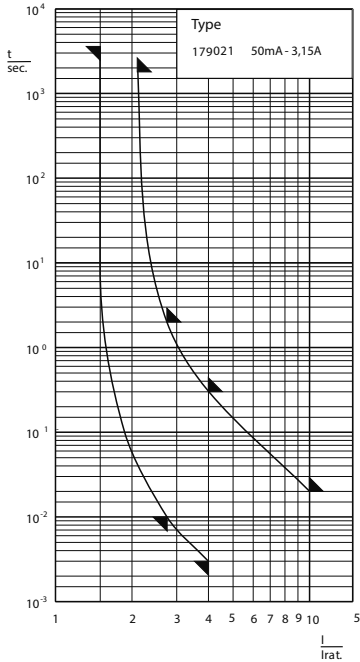

Abmessungen
Dimensions



Aufbau / Construction
Keramikrohr / ceramic tube
Kontaktkappen / end caps

undurchsichtig / non transparent
Messing, vernickelt / brass, nickel-plated

Schmelzeitgrenzwerte / Fusing time limits

Bemessungsstrom Rated Current	1,5 I _n		2,1 I _n		2,75 I _n		4 I _n		10 I _n	
	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.
500 mA - 3,15 A	1 h	30 min	10 ms	2 s	3 ms	300 ms	-	20 ms		
4 - 6,3 A	1 h	30 min	10 ms	3 s	3 ms	300 ms	-	20 ms		
8 - 16 A	30 min	30 min	40 ms	20 s	10 ms	1 s	-	30 ms		

IEC 60127-2/1 EN 60127-2/1 VDE 0820-2/1	5 x 20 mm	250 V	F flink quick acting
---	-----------	-------	----------------------------

Artikel-Nr. Article-no.	Bemessungsstrom Rated Current	Bemessungs-Ausschaltvermögen Rated Breaking Capacity	Spannungsfall Voltage Drop	Leistungsabgabe Power Dissipation (@1,5 I _n)	Schmelzintegral I ² t ₉₀ Value	Approbationen Approvals
			mV	W	A ² s	Semko UL rec.
179021.0,05	50 mA	1500 A @ AC 250 V ¹⁾	4000	0,5	0,00022	✓ *
179021.0,063	63 mA	1500 A @ AC 250 V ¹⁾	3900	0,6	0,00037	✓ *
179021.0,08	80 mA	1500 A @ AC 250 V ¹⁾	3200	0,7	0,00073	✓ *
179021.0,1	100 mA	1500 A @ AC 250 V ¹⁾	2600	0,8	0,0011	✓ *
179021.0,125	125 mA	1500 A @ AC 250 V ¹⁾	360	0,2	0,01	✓ *
179021.0,16	160 mA	1500 A @ AC 250 V ¹⁾	320	0,2	0,02	✓ *
179021.0,2	200 mA	1500 A @ AC 250 V ¹⁾	290	0,2	0,04	✓ *
179021.0,25	250 mA	1500 A @ AC 250 V ¹⁾	280	0,3	0,07	✓ *
179021.0,315	315 mA	1500 A @ AC 250 V ¹⁾	230	0,3	0,17	✓ *
179021.0,4	400 mA	1500 A @ AC 250 V ¹⁾	650	0,9	0,07	✓ *
179021.0,5	500 mA	1500 A @ AC 250 V ¹⁾	600	1,0	0,23	✓ *
179021.0,63	630 mA	1500 A @ AC 250 V ¹⁾	550	1,1	0,31	✓ *
179021.0,8	800 mA	1500 A @ AC 250 V ¹⁾	500	1,3	0,47	✓ *
179021.1	1 A	1500 A @ AC 250 V ¹⁾	450	1,4	0,25	✓ *
179021.1,25	1,25 A	1500 A @ AC 250 V ¹⁾	400	1,6	0,39	✓ *
179021.1,6	1,6 A	1500 A @ AC 250 V ¹⁾	350	1,8	0,45	✓ *
179021.2	2 A	1500 A @ AC 250 V ¹⁾	320	2,0	0,88	✓ *
179021.2,5	2,5 A	1500 A @ AC 250 V ¹⁾	270	2,1	1,2	✓ *
179021.3,15	3,15 A	1500 A @ AC 250 V ¹⁾	220	2,2	4,0	✓ *
179021.4	4 A	1500 A @ AC 250 V ¹⁾	180	2,3	10	✓ *
179021.5	5 A	1500 A @ AC 250 V ¹⁾	150	2,4	19	✓ *
179021.6,3	6,3 A	1500 A @ AC 250 V ¹⁾	130	2,6	32	✓ *
179021.8	8 A	1500 A @ AC 250 V ¹⁾	100	2,8	120	✓ *
179021.10	10 A	1500 A @ AC 250 V ¹⁾	100	3,0	190	✓ *
179021.12,5	12,5 A ²⁾	1000 A @ AC 250 V	100	3,4	300	
179021.16	16 A ²⁾	1000 A @ AC 250 V	100	4,0	600	

¹⁾ cosφ = 0,7-0,8

²⁾ zusätzlich lieferbare Bemessungsströme / Non-standard ratings also available

* UL Recognition beantragt - applied for UL Recognition

Type	Abk. Abbr.	Beschreibung Description
	-	100 Stück/ Pieces (10 x 10)
179021	IP	1.000 Stück Industrieverpackung / 1.000 pieces industrial packs
	FC	1.000 Stück mit Farbcode / 1.000 pieces with colour code
	AK	mit montierten Aufsteckkappen/ with assembled push-on caps
z.B./ e.g.	179021.2,5IP	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [siba](#) manufacturer:

Other Similar products are found below :

[154000.0,25](#) [154000.0,5](#) [154000.1,5](#) [154000.3,15](#) [157000.0,062](#) [154000.0,75](#) [154000.2,5](#) [154000.3](#) [158000.0,25](#) [158000.0,63](#) [158000.0,75](#)
[158000.1](#) [158000.1,6](#) [158000.3](#) [157000.0,125](#) [158000.0,315](#) [158000.0,375](#) [158000.0,4](#) [158000.0,5](#) [158000.0,8](#) [158000.4](#) [158000.5](#) [158000.7](#)
[160000.0,032](#) [160000.0,04](#) [160000.0,063](#) [160000.0,08](#) [160000.0,125](#) [160000.0,2](#) [160000.0,315](#) [160000.0,5](#) [160000.1](#) [160000.1,6](#)
[160000.2,5](#) [160000.3,15](#) [160000.4](#) [160000.5](#) [160000.0,05](#) [160000.0,16](#) [160000.0,25](#) [160000.0,4](#) [160000.0,63](#) [160000.2](#) [2000413.40](#)
[2000413.25](#) [50-124-06 25A](#) [160000.0,315-GT](#) [166050.0,063](#) [2000313.100](#) [2800104](#)