



AS-Interface Addressing unit V3.0 for setting the addresses of AS-i slave modules Input/output test and further functions AS-i specification V3.0 M12 connection socket with addressing cable 1.5 m (M12 connector/hollow plug) with batteries (4 x 1.5 V LR6)

General technical data		
design of the product		AS-Interface addressing unit
Power supply		is provided by 4 batteries according to IEC LR6 (NEDA 15), which guarantee that the unit can perform at least 2500 device addressings. For a longer battery life the unit is switched off automatically approx. 1 minute after the last operation
rated operational current Ie	mA	150
other information		storage temperature without batteries
Ambient conditions		
environmental conditions Relative humidity		max. 75 %, condensation not permitted
ambient temperature		
• during operation	°C	0 ... 55
• during storage	°C	-20 ... +55
degree of protection		
• device		IP50
• connection socket		IP20
Conditions of application		only in indoor rooms
Mechanical data		
width	mm	84
height	mm	195
depth	mm	35
connection		via M12 socket: Pin1=AS-i+; Pin3=AS-i-

Certificates/ approvals	
General Product Approval	EMV      Marine / Shipping



[Confirmation](#)



other	Dangerous Good	Environment
-------	----------------	-------------

[Confirmation](#)

[Transport Information](#)

[Environmental Confirmations](#)

**Further information**

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
 Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1904-2AB02>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1904-2AB02>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1904-2AB02>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RK1904-2AB02&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1904-2AB02&lang=en)

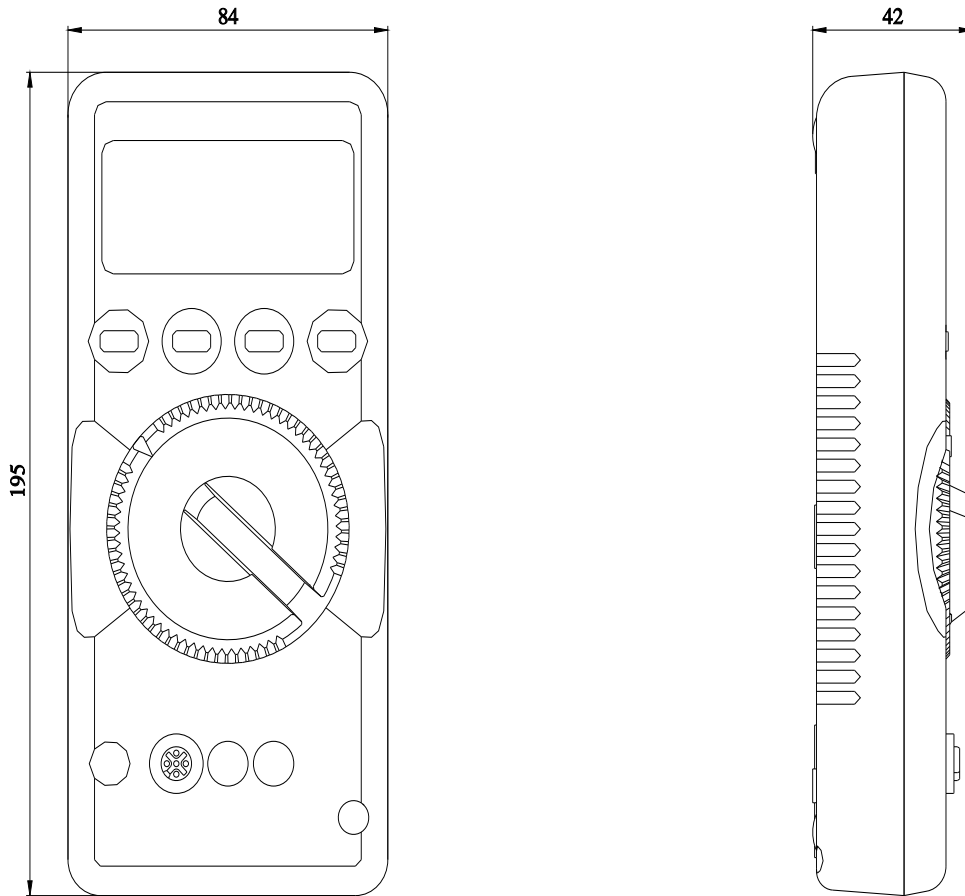

last modified:

12/23/2020 

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Controller Accessories](#) category:*

*Click to view products by [Siemens](#) manufacturer:*

Other Similar products are found below :

[G4PB8H](#) [R88A-CAGA003B](#) [AFPG807](#) [AFPX-A21](#) [AFPX-COM2](#) [G4PB16I](#) [G4PB4R](#) [ES100CT022202](#) [DRT2-OD16MLX](#) [E53-COV12](#)  
[R88A-CAGA005BR](#) [26546849](#) [50073216-08](#) [50073217-08](#) [89789-16](#) [CP2W-BAT02](#) [V600-H07 2M](#) [CV500-CN624](#) [6ES71936BP000BA0](#)  
[6ES71936BP000DA0](#) [SNAP-D12M](#) [CP1W-MAD44](#) [CP1W-EXT01](#) [2700992](#) [2878599](#) [2900889](#) [CP1W-BAT01](#) [E53-COV16](#) [CP1W-CIF11](#)  
[K32-49HC](#) [DCN2-1](#) [2913157](#) [2962463](#) [SNAP-PAC-RCK4](#) [Y92F-74](#) [3G3AX-CUSBM002-E](#) [IM-T-11A](#) [SNAP-PAC-RCK12](#) [SNAP-PAC-](#)  
[RCK8](#) [Y92A-49N](#) [FC6A-PC1](#) [IM-T-9A](#) [2400195](#) [6ED1055-4MH08-0BA1](#) [6ED1057-4EA00-0AA0](#) [88980124](#) [AFP0HCCM1](#)  
[AFP0HCCS1M1](#) [AFPXCOM5](#) [3005013](#)