

Voltage relays AC 230/400V 0.85 2 CO contacts Response delay 0.5 s Return transfer delay 60 s Test key



Figure similar

Model	
Product brand name	SENTRON
Product designation	Voltage relay
General technical data	
Adjustable pickup delay time / initial value	0.5 s
Measurable voltage / at AC / initial value	195.5 V
Voltage	
Type of voltage / for actuation	AC
Type of voltage / for monitoring	AC
Adjustable voltage range / Full-scale value	195.5 V
Measurable voltage / at AC / Full-scale value	264.5 V
Current	
Adjustable voltage range / initial value	195.5 V
Control current	
Control supply voltage	
<ul style="list-style-type: none"> <li>at AC / at 50 Hz / rated value / minimum</li> </ul>	195.5 V

- at AC / at 50 Hz / rated value / maximum 264.5 V
- at AC / at 60 Hz / rated value / minimum 195.5 V
- at AC / at 60 Hz / rated value / maximum 264.5 V

#### Auxiliary circuit

Number of CO contacts / for auxiliary contacts	2
Number of NC contacts / for auxiliary contacts	0
Number of NO contacts / for auxiliary contacts	0

#### Adjustable parameters

Adjustable pickup delay time / Full-scale value	0.5 s
Adjustable OFF-delay time	
• initial value	60 s
• Full-scale value	60 s

#### Product function

Product function	
• Voltage window recognition 1 phase	No
• Voltage window recognition 3 phase	No
• Voltage window recognition DC	No
• Overvoltage detection 1 phase	No
• Overvoltage detection 3 phase	No
• Overvoltage detection DC	No
• undervoltage detection 1 phase	Yes
• undervoltage detection 3 phases	Yes
• undervoltage detection DC	No

#### Connections

Type of electrical connection	screw-type terminals
• Plug-in socket	No

#### Mechanical Design

Height	90 mm
Width	18 mm
Depth	64 mm

#### Certificates

Declaration of Conformity

other

[Miscellaneous](#)



#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TT3415>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/5TT3415>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TT3415](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT3415)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

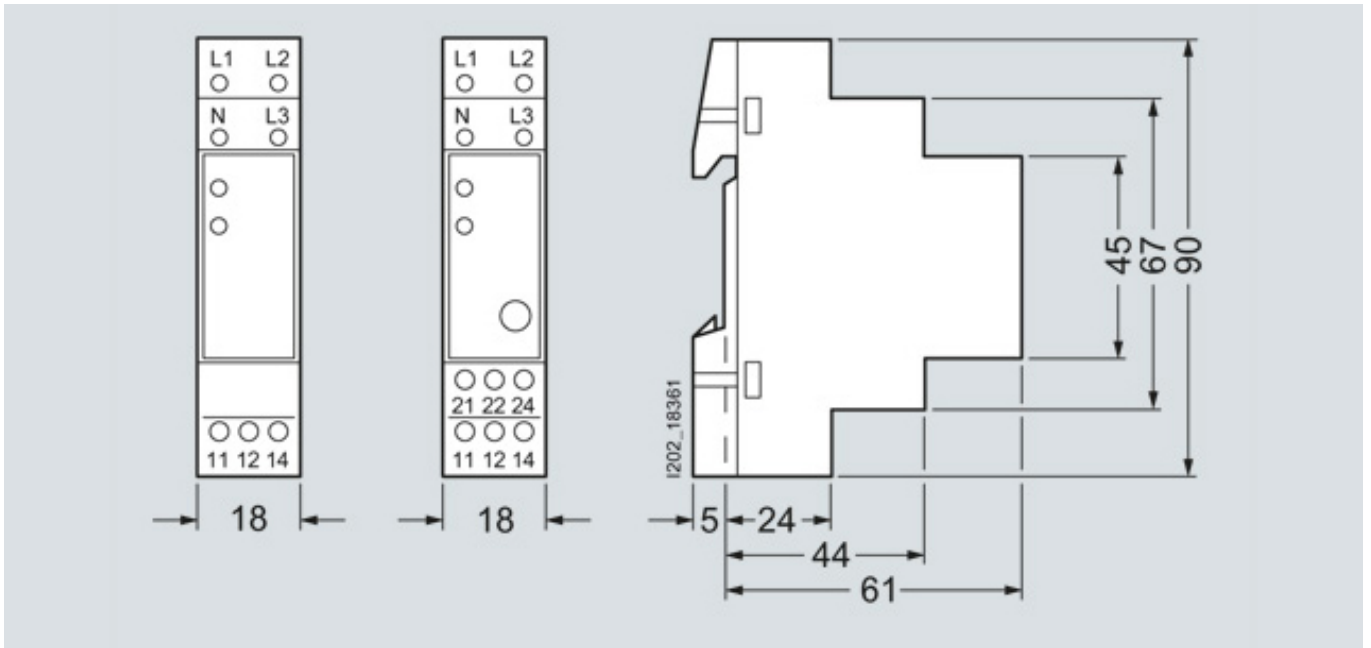

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [General Purpose Relays](#) category:*

*Click to view products by [Siemens](#) manufacturer:*

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)  
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)  
[7-1393144-5](#) [7-1393767-8](#)