

Phase monitor 230 V AC 4 A



Model	
Product designation	Phase monitor
General technical data	
Operating range factor / of control voltage_1	0.8
Adjustable pickup delay time / initial value	0 s
Determinants / for climatic applicability / acc. to IEC 60068-1	20/60/4
Measurable voltage / at AC / initial value	400 V
Switching voltage / of the contacts / at AC / minimum	10 V
Switching current / at AC / per contact / minimum	100 mA
Voltage	
Type of voltage / for actuation	AC
Rated insulation voltage U_i / between spool contact	4 kV
Measurable voltage / at AC / Full-scale value	400 V
Surge voltage resistance / between contacts of the relay operating mechanism	2.5 kV
Supply voltage	
Operating voltage / at AC / rated value	250 V

Protection class IP	IP20, with connected conductors
Operating resource protection class	II
Dissipation	
Rated power loss P _v	9VA (Electronic) ; 0,2VA (contact)
Operating current / rated value	4 A
Control current	
Control supply voltage	
• at DC / rated value / minimum	0 V
• at DC / rated value / maximum	0 V
• at AC / at 50 Hz / rated value / minimum	400 V
• at AC / at 50 Hz / rated value / maximum	400 V
• at AC / at 60 Hz / rated value / minimum	400 V
• at AC / at 60 Hz / rated value / maximum	400 V
Operating range factor / of control voltage_2	1.1
Auxiliary circuit	
Number of CO contacts / for auxiliary contacts	1
Number of NC contacts / for auxiliary contacts	0
Number of NO contacts / for auxiliary contacts	0
Adjustable parameters	
Adjustable pickup delay time / Full-scale value	0 s
Adjustable OFF-delay time	
• initial value	0 s
• Full-scale value	0 s
Product function	
Product function	
• Phase unbalance	No
• Phase failure detection	Yes
• phase sequence recognition	No
• Overvoltage detection	No
• undervoltage detection	No
Number	
Number of terminals / with cross-head screw	1
Connections	
Type of connectable conductor cross-sections	2 × 2.5 mm ² (rigid, max.)
Type of electrical connection	screw-type terminals
• Plug-in socket	No
Mechanical Design	
Height	90 mm
Width	18 mm

Depth	64 mm
Required spacing / between contacts of the relay operating mechanism	4 mm
Net weight	80 g

Certificates

Declaration of Conformity	other
----------------------------------	--------------



EG-Konf.

[Environmental Confirmations](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TT3421>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5TT3421>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT3421

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

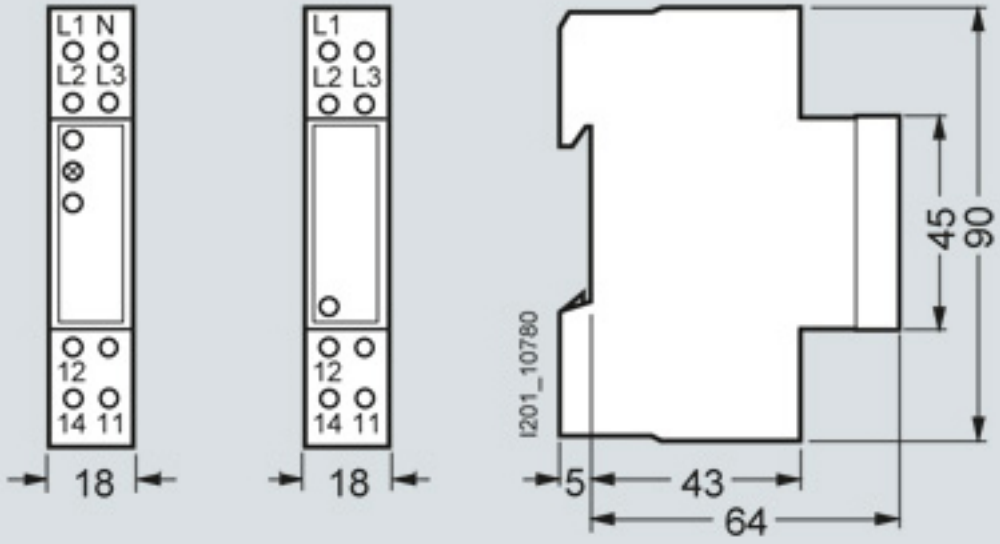

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Siemens](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)