

Pressure Measurement

Transmitters for basic requirements

SITRANS P200 for gauge and absolute pressure

1

Technical specifications

Application	Gauge and absolute pressure measurement	Liquids, gases and vapors
Mode of operation	Measuring principle	Piezo-resistive measuring cell (ceramic diaphragm)
	Measured variable	Gauge and absolute pressure
Inputs	Measuring range	
	<ul style="list-style-type: none"> Gauge pressure <ul style="list-style-type: none"> - Metric - US measuring range Absolute pressure <ul style="list-style-type: none"> - Metric - US measuring range 	1 ... 60 bar (15 ... 870 psi) 15 ... 1000 psi 0.6 ... 16 bar a (10 ... 232 psia) 10 ... 300 psia
Output	Current signal	4 ... 20 mA
	• Load	$(U_B - 10 \text{ V}) / 0.02 \text{ A}$
	• Auxiliary power U_B	DC 7 ... 33 V (10 ... 30 V for Ex)
	Voltage signal	0 ... 10 V DC
	• Load	$\geq 10 \text{ k}\Omega$
	• Auxiliary power U_B	12 ... 33 V DC
	• Power consumption	< 7 mA at 10 k Ω
	Characteristic curve	Linear rising
Measuring accuracy	Error in measurement at limit setting incl. hysteresis and reproducibility	<ul style="list-style-type: none"> Typical: 0.25 % of full-scale value Maximum: 0.5 % of full-scale value
	Step response time T_{99}	< 5 ms
	Long-term stability	
	• Lower range value and measuring span	0.25 % of full-scale value/year
	Influence of ambient temperature	
	• Lower range value and measuring span	0.25 %/10 K of full-scale value
	• Influence of power supply	0.005 %/V
Conditions of use	Process temperature with gasket made of:	
	• FPM (Standard)	-15 ... +125 °C (+5 ... +257 °F)
	• Neoprene	-35 ... +100 °C (-31 ... +212 °F)
	• Perbunan	-20 ... +100 °C (-4 ... +212 °F)
	• EPDM	-40 ... +145 °C (-40 ... +293 °F), usable for drinking water
	Ambient temperature	-25 ... +85 °C (-13 ... +185 °F)
	Storage temperature	-50 ... +100 °C (-58 ... +212 °F)
	Degree of protection (to EN 60529)	<ul style="list-style-type: none"> IP 65 with connector per EN 175301-803-A IP 67 with M12 connector IP 67 with cable IP 67 with cable quick screw connection
	Electromagnetic compatibility	<ul style="list-style-type: none"> acc. IEC 61326-1/-2/-3 acc. NAMUR NE21, only for ATEX versions and with a max. measuring deviation $\leq 1 \%$

Design

Weight	Approx. 0.090 kg (0.198 lb)
Process connections	See dimension drawings
Electrical connections	<ul style="list-style-type: none"> Connector per EN 175301-803-A Form A with cable inlet M16x1.5 or 1/2-14 NPT or Pg 11 M12 connector 2 or 3-wire (0.5 mm²) cable ($\varnothing \pm 5.4 \text{ mm}$) Quickon cable quick screw connection
Wetted parts materials	
• Measuring cell	Al ₂ O ₃ - 96 %
• Process connection	Stainless steel, mat. No. 1.4404 (SST 316 L)
• Gasket	<ul style="list-style-type: none"> FPM (Standard) Neoprene Perbunan EPDM
Non-wetted parts materials	
• Enclosure	Stainless steel, mat. No. 1.4404 (SST 316 L)
• Rack	Plastic
• Cables	PVC
Certificates and approvals	
Classification according to pressure equipment directive (PED 97/23/EC)	For gases of fluid group 1 and liquids of fluid group 1; complies with requirements of article 3, paragraph 3 (sound engineering practice)
Lloyd's Register of Shipping (LR)	12/20010
Germanischer Lloyd (GL)	GL19740 11 HH00
American Bureau of Shipping (ABS)	ABS_11_HG 789392_PDA
Bureau Veritas (BV)	BV 271007A0 BV
Det Norske Veritas (DNV)	A 12553
Drinking water approval (ACS)	ACS 11 ACC NY 055
GOST	GOST-R
Underwriters Laboratories (UL)	
• for USA and Canada	UL 20110217 - E34453
• worldwide	IEC UL DK 21845
Explosion protection	
Intrinsic safety "i" (only with current output)	Ex II 1/2 G Ex ia IIC T4 Ga/Gb Ex II 1/2 D Ex ia IIIC T125 °C Da/Db
EC type-examination certificate	SEV 10 ATEX 0146
Connection to certified intrinsically-safe resistive circuits with maximum values:	$U_i \leq 30 \text{ V DC}$; $I_i \leq 100 \text{ mA}$; $P_i \leq 0.75 \text{ W}$
Effective internal inductance and capacity for versions with plugs per EN 175301-803-A and M12	$L_i = 0 \text{ nH}$; $C_i = 0 \text{ nF}$

Pressure Measurement

Transmitters for basic requirements

SITRANS P200
 for gauge and absolute pressure

1

Selection and ordering data					Article No.	Order code
SITRANS P 200 pressure transmitters for pressure and absolute pressure for general applications					7MF1565-	
Characteristic curve deviation typ. 0.25 %						
Wetted parts materials: Ceramic and stainless steel + sealing material						
Non-wetted parts materials: stainless steel						
Measuring range		Overload limit		Burst pressure		
		Min.	Max.			
For gauge pressure						
0 ... 1 bar	(0 ... 14.5 psi)	-1 bar (-14.5 psi)	2.5 bar (36.26 psi)	> 2.5 bar (> 36.3 psi)	▶◆	3BA
0 ... 1.6 bar	(0 ... 23.2 psi)	-1 bar (-14.5 psi)	4 bar (58.02 psi)	> 4 bar (> 58.0 psi)	▶◆	3BB
0 ... 2.5 bar	(0 ... 36.3 psi)	-1 bar (-14.5 psi)	6.25 bar (90.65 psi)	> 6.25 bar (> 90.7 psi)	▶◆	3BD
0 ... 4 bar	(0 ... 58.0 psi)	-1 bar (-14.5 psi)	10 bar (145 psi)	> 10 bar (> 145 psi)	▶◆	3BE
0 ... 6 bar	(0 ... 87.0 psi)	-1 bar (-14.5 psi)	15 bar (217 psi)	> 15 bar (> 217 psi)	▶◆	3BG
0 ... 10 bar	(0 ... 145 psi)	-1 bar (-14.5 psi)	25 bar (362 psi)	> 25 bar (> 362 psi)	▶◆	3CA
0 ... 16 bar	(0 ... 232 psi)	-1 bar (-14.5 psi)	40 bar (580 psi)	> 40 bar (> 580 psi)	▶◆	3CB
0 ... 25 bar	(0 ... 363 psi)	-1 bar (-14.5 psi)	62.5 bar (906 psi)	> 62.5 bar (> 906 psi)	▶◆	3CD
0 ... 40 bar	(0 ... 580 psi)	-1 bar (-14.5 psi)	100 bar (1450 psi)	> 100 bar (> 1450 psi)	▶◆	3CE
0 ... 60 bar	(0 ... 870 psi)	-1 bar (-14.5 psi)	150 bar (2175 psi)	> 150 bar (> 2175 psi)	▶◆	3CG
Other version, add Order code and plain text: Measuring range: ... up to... bar (psi)						9AA H1Y
For absolute pressure						
0 ... 0.6 bar a	(0 ... 8.7 psia)	0 bar a (0 psia)	3 bar a (43.51 psia)	> 2.5 bar a (> 36.3 psia)	▶◆	5AG
0 ... 1 bar a	(0 ... 14.5 psia)	0 bar a (0 psia)	2.5 bar a (36.26 psia)	> 2.5 bar a (> 36.3 psia)	▶◆	5BA
0 ... 1.6 bar a	(0 ... 23.2 psia)	0 bar a (0 psia)	4 bar a (58.02 psia)	> 4 bar a (> 58.0 psia)	▶◆	5BB
0 ... 2.5 bar a	(0 ... 36.3 psia)	0 bar a (0 psia)	6.25 bar a (90.65 psia)	> 6.25 bar a (> 90.7 psia)	▶◆	5BD
0 ... 4 bar a	(0 ... 58.0 psia)	0 bar a (0 psia)	10 bar a (145 psia)	> 10 bar a (> 145 psia)	▶◆	5BE
0 ... 6 bar a	(0 ... 87.0 psia)	0 bar a (0 psia)	15 bar a (217 psia)	> 15 bar a (> 217 psia)	▶◆	5BG
0 ... 10 bar a	(0 ... 145 psia)	0 bar a (0 psia)	25 bar a (362 psia)	> 25 bar a (> 362 psia)	▶◆	5CA
0 ... 16 bar a	(0 ... 232 psia)	0 bar a (0 psia)	40 bar a (580 psia)	> 40 bar a (> 580 psia)	▶◆	5CB
Other version, add Order code and plain text: Measuring range: ... up to ... mbar a (psia)						9AA H2Y
Measuring ranges for gauge pressure (only for US market)						
(0 ... 15 psi)		(-14.5 psi)	(35 psi)	(> 35 psi)		4BB
(3 ... 15 psi)		(-14.5 psi)	(35 psi)	(> 35 psi)		4BC
(0 ... 20 psi)		(-14.5 psi)	(50 psi)	(> 50 psi)		4BD
(0 ... 30 psi)		(-14.5 psi)	(80 psi)	(> 80 psi)		4BE
(0 ... 60 psi)		(-14.5 psi)	(140 psi)	(> 140 psi)		4BF
(0 ... 100 psi)		(-14.5 psi)	(200 psi)	(> 200 psi)		4BG
(0 ... 150 psi)		(-14.5 psi)	(350 psi)	(> 350 psi)		4CA
(0 ... 200 psi)		(-14.5 psi)	(550 psi)	(> 550 psi)		4CB
(0 ... 300 psi)		(-14.5 psi)	(800 psi)	(> 800 psi)		4CD
(0 ... 500 psi)		(-14.5 psi)	(1400 psi)	(> 1400 psi)		4CE
(0 ... 750 psi)		(-14.5 psi)	(2000 psi)	(> 2000 psi)		4CF
(0 ... 1000 psi)		(-14.5 psi)	(2000 psi)	(> 2000 psi)		4CG
Other version, add Order code and plain text: Measuring range: ... up to ... psi						9AA H1Y
Measuring ranges for absolute pressure (only for US market)						
(0 ... 10 psia)	(0 psia)		(35 psia)	(> 35 psia)		6AG
(0 ... 15 psia)	(0 psia)		(35 psia)	(> 35 psia)		6BA
(0 ... 20 psia)	(0 psia)		(50 psia)	(> 50 psia)		6BB
(0 ... 30 psia)	(0 psia)		(80 psia)	(> 80 psia)		6BD
(0 ... 60 psia)	(0 psia)		(140 psia)	(> 140 psia)		6BE
(0 ... 100 psia)	(0 psia)		(200 psia)	(> 200 psia)		6BG
(0 ... 150 psia)	(0 psia)		(350 psia)	(> 350 psia)		6CA
(0 ... 200 psia)	(0 psia)		(550 psia)	(> 550 psia)		6CB
(0 ... 300 psia)	(0 psia)		(800 psia)	(> 800 psia)		6CC
Other version, add Order code and plain text: Measuring range: ... up to ... psia						9AA H2Y

▶ Available ex stock

◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 9/5 in the appendix.

Pressure Measurement

Transmitters for basic requirements

SITRANS P200 for gauge and absolute pressure

1

Selection and ordering data	Article No.	Order code
SITRANS P 200 pressure transmitters for pressure and absolute pressure for general applications	7MF1565-	
Accuracy typ. 0.25 %		
Wetted parts materials: Ceramic and stainless steel + sealing material		
Non-wetted parts materials: stainless steel		
Output signal		
4 ... 20 mA; two-wire system; power supply 7 ... 33 V DC (10 ... 30 V DC for ATEX versions) ▶◆		0
0 ... 10 V; three-wire system; power supply 12 ... 33 V DC		10
Explosion protection (only 4 ... 20 mA)		
None ▶◆		0
With explosion protection Ex ia IIC T4 ▶◆		1
Electrical connection		
Connector per DIN EN 175301-803-A, stuffing box thread M16 (with coupling) ▶◆		1
Round connector M12 per IEC 61076-2-101 (not for gauge pressure ranges ≤ 16 bar)		2
Connection via fixed mounted cable, 2m (not for type of protection "Intrinsic safety i")		03
Quickon cable quick screw connection PG9 (not for type of protection "Intrinsic safety i")		04
Connector per DIN EN 175301-803-A, stuffing box thread 1/2"-14 NPT (with coupling)		5
Connector per DIN EN 175301-803-A, stuffing box thread PG11 (with coupling)		6
Fixed mounted cable, length 5 m		07
Special version		9 N1Y
Process connection		
G1/2" male per EN 837-1 (1/2" BSP male) (standard for metric pressure ranges mbar, bar) ▶◆		A
G1/2" male thread and G1/8" female thread		B
G3/4" male per EN 837-1 (1/4" BSP male)		C
7/16"-20 UNF male		D
1/4"-18 NPT male (standard for pressure ranges inH ₂ O and psi)		E
1/4"-18 NPT female		F
1/2"-14 NPT male		G
1/2"-14 NPT female		H
7/16"-20 UNF female		J
M20x1.5 male		P
Special version		Z P1Y
Sealing material between sensor and enclosure		
Viton (FPM, standard) ▶◆		A
Neoprene (CR)		B
Perbunan (NBR)		C
EPDM		D
Special version		Z Q1Y
Version		
Standard version ▶◆		1
Further designs		
Supplement the Article No. with "-Z" and add Order code.		
Manufacturer's test certificate M per IEC 60770-2 (calibration certificate) supplied	C11	
Oxygen application, oil and grease-free cleaning (only in conjunction with the sealing material Viton between sensor and enclosure and not with explosion portection version)	E10	

▶ Available ex stock


◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 9/5 in the appendix.

Pressure Measurement


Transmitters for basic requirements

SITRANS P200 for gauge and absolute pressure

Dimensional drawings

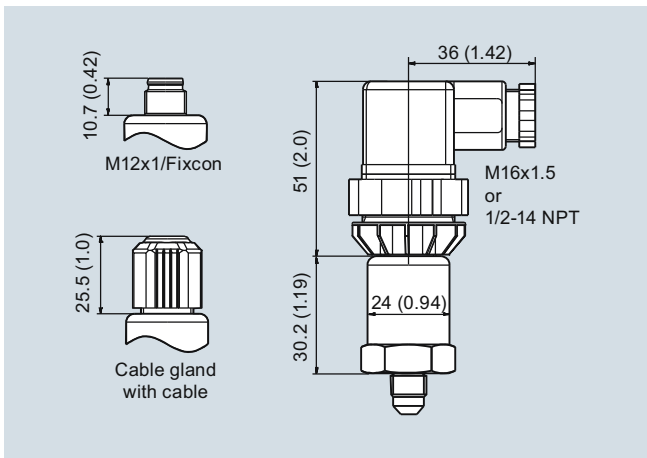

SITRANS P200, electrical connections, dimensions in mm (inch)

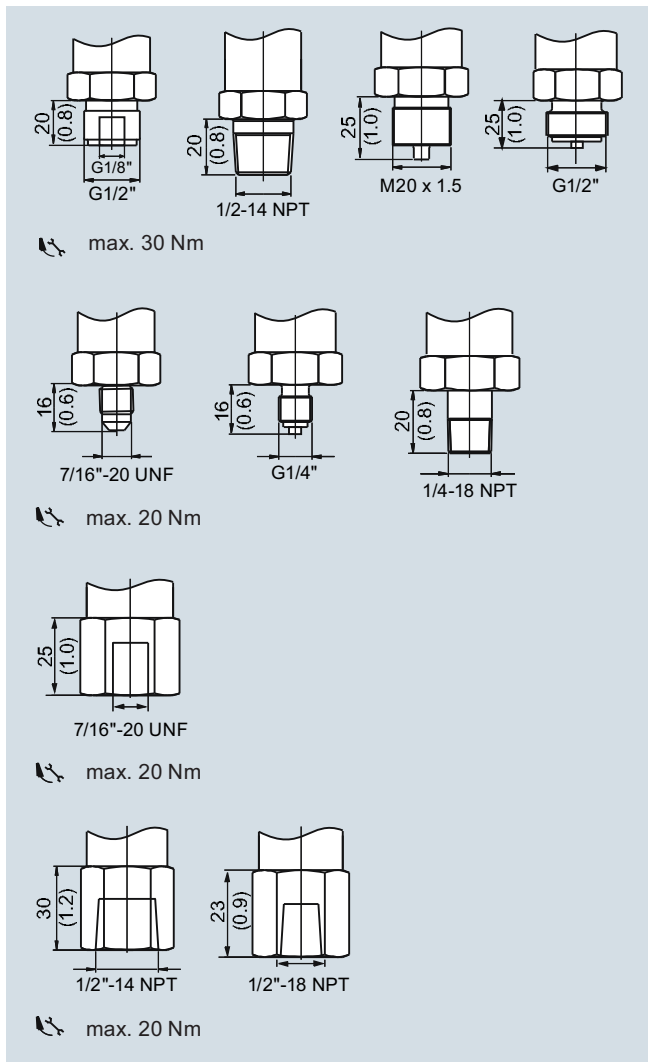


SITRANS P200, process connections, dimensions in mm (inch)

Pressure Measurement Transmitters for basic requirements


SITRANS P200
for gauge and absolute pressure

1


Schematics

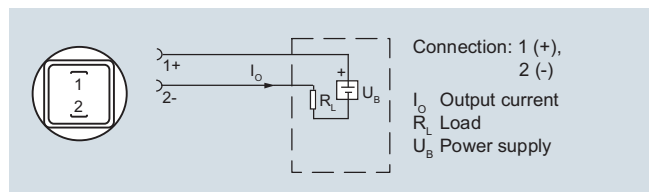


Connection with current output and connector per EN 175301

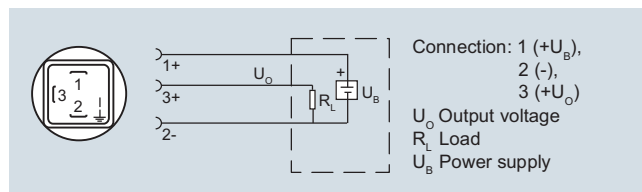


Connection with voltage output and connector per EN 175301

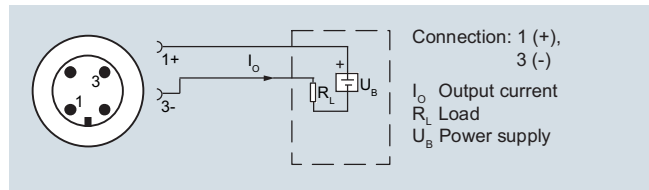


Connection with current output and connector M12x1

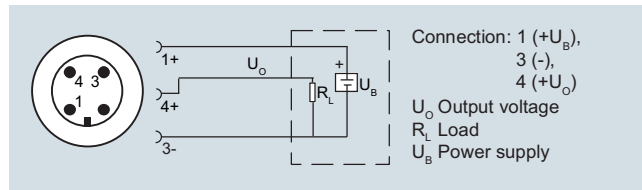


Connection with voltage output and connector M12x1

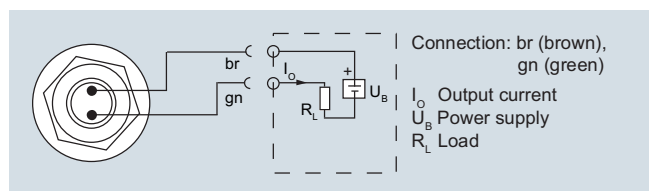


Connection with current output and cable

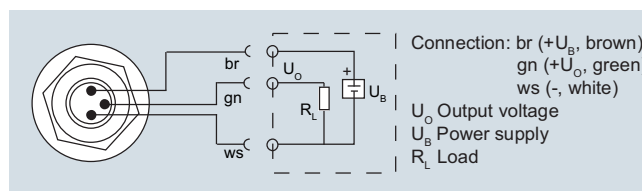

Connection with voltage output and cable

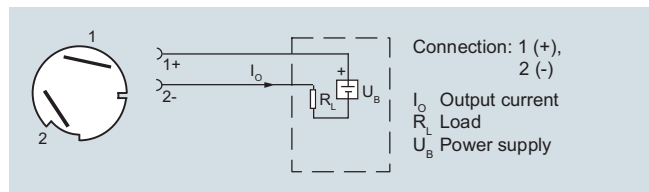


Connection with current output and Quickon cable quick screw connection

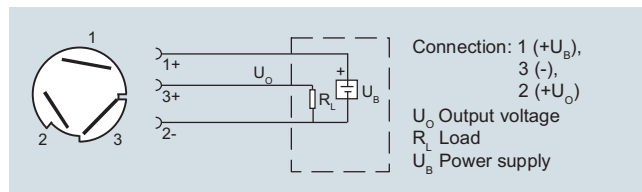


Connection with voltage output and Quickon cable quick screw connection

Version with explosion protection: 4 ... 20 mA

The grounding connection is conductively bonded to the transmitter enclosure

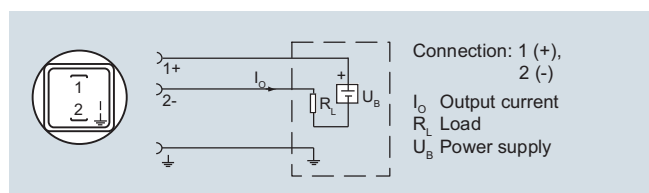

Connection with current output and connector per EN 175301 (Ex)

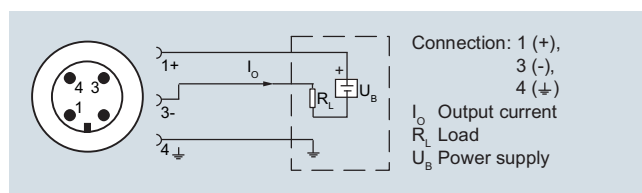

Connection with current output and connector M12x1 (Ex)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Speakers & Transducers](#) category:

Click to view products by [Siemens](#) manufacturer:

Other Similar products are found below :

[AS02016MR-2-R](#) [PB-1220PE](#) [PB-2015PQ](#) [900-00001](#) [SMT-2240-TW-2-R](#) [SWFK-31736-000](#) [PT-2065FW](#) [PT-4175W](#) [AT-2830-TW-LW35-R](#) [ED-30761-000](#) [ED-31305-163](#) [CI-30120-A42](#) [TWFK-23991-000](#) [PB-0927PQ](#) [BF-7083-000](#) [AB6505B](#) [AS01708MR-SC-2-R](#) [AT-5030-TF-2-LW100-R](#) [AST-03008MR-R](#) [AS04008PS-4W-R](#) [AS01308MR-2-R](#) [AS01808AO-WP-R](#) [AS01508MR-6-R](#) [AS07108PO-R](#) [AS07708PS-2-WR-R](#) [AS07104PO-R](#) [SMS2020-08H4.5 LF](#) [BDT1717-08H6.5W56MLF](#) [SMS-2008MS-R](#) [AS04008PS-4W-WR-R](#) [AS06608PS-WR-R](#) [BLS50-1-08H18.2B-03 LF](#) [AS07008PO-2-R](#) [AS03008MR-R](#) [AS04008CO-2-R](#) [AS04008PR-WR-R](#) [ASE03008MR-LW150-R](#) [AS01808MR-LW152-R](#) [AS01808MR-R](#) [AS03608MR-4-R](#) [AS06608PS-R](#) [AS07708PS-2-R](#) [ASE06008MR-LW150-R](#) [ASE02008MR-LW150-R](#) [AST-1732MR-R](#) [SMS-1508MS-2-R](#) [AS05708MR-R](#) [AS05008MR-R](#) [APS3008S-R](#) [AS02008MR-R](#)