Rev. 1.0

FieldServer Data Sheet – QuickServer FS-QS-1XXX



Overview

QuickServer is a high performance, fully configurable, cost effective Building and Industrial Automation gateway for integrators to easily interface devices to networks in commercial buildings and industrial plants.

System integrators world-wide have benefitted from the value of the powerful line of interoperability gateways offered by FieldServer. Now, QuickServer adds to that value by running the same robust FieldServer protocol conversion software on a highly costeffective platform backed by the experience, engineering expertise and proven technical support that integrators have come to expect from FieldServer.


QuickServer is available in two series. The FS-QS-10XX Series is preloaded with two BAS drivers (serial, Ethernet and/or LonWorks) from a choice of Modbus RTU, Modbus TCP/IP, BACnet/IP[®], BACnet MS/TP, LonWorks[®], JCI Metasys[®] N2 and SNMP. Each QuickServer can handle up to 250 points.

The FS-QS-12XX Series QuickServer is available to use any Serial, Ethernet or LonWorks driver in the extensive FieldServer driver library. The FS-QS-12XX Series can handle up to 500 points and is available with a choice of RS-485, RS-232 or RS-422 serial ports, KNX or M-Bus, in addition to Ethernet and LonWorks (optional). The FS-QS-13XX and FS-QS-14XX have the same port options but the 13XX can support up to 3,000 points while the 14XX can support up to 5,000.

Each QuickServer includes browser-based tools to make it easy to set-up QuickServer and perform diagnostics including determination of status, network settings, node information, map descriptors and more. The USB flash drive also includes the Discovery utility to determine what FieldServers are on a network.

QuickServer Features and Benefits

- Interface 250-5,000 points (see Specifications).
- Multi-configuration capability; configurations selectable via DIP switches or software.
- Flat panel mount standard, DIN rail mount option.
- DIP switches select baud rate or node ID on the fly.
- BACnet COV support for fast data communication while reducing the traffic over a BACnet network.
- SMC Cloud registration connects your devices to the cloud, allowing secure remote access for diagnostics, monitoring, alarming and configuration.
- On-board diagnostics allow easy troubleshooting for both serial and Ethernet communications.



• FieldSafe adds a wealth of security options, including: web configuration page authentication (self-signed certificates), robust user and password management features.

FieldServer Offers

- Largest protocol driver library in the industry, providing the solution to your integration needs.
- Over 10 years of experience in design and manufacture of building automation gateways with thousands of installations, over 700 translation paths using over 100 protocol drivers.
- Trusted, proven technical support before and after shipment.
- FieldServer partners with BAS and Fire Alarm Panel manufacturers and trade associations to ensure that the drivers and hardware meet your highest industry expectations.

Accessories

Optional Accessory Kit includes AC power supply, DIN mounting bracket assembly, Ethernet cable, miniscrewdriver and a USB flash drive with all data sheets, manuals, notes, the discovery tool and more,

Field Connections								
	Interface Connections							
	RS-2321	RS-485 ²	RS-422 ³	KNX ⁶	RS-485	M-Bus	Ethernet ⁴	LonWorks⁵
FS-QS-1X11		1					1	1
FS-QS-1221	1						1	1
FS-QS-1230		1	1				1	
FS-QS-1231			1				1	1
FS-QS-1240		1		1			1	
FS-QS-1241				1			1	1
FS-QS-1X50					1	1	1	
FS-QS-1X51						1	1	1
	FS-QS-1221 FS-QS-1230 FS-QS-1231 FS-QS-1240 FS-QS-1241 FS-QS-1250	FS-QS-1X11 FS-QS-1221 1 FS-QS-1230 1 FS-QS-1231 1 FS-QS-1241 1 FS-QS-1241 1	FS-QS-1X11 1 FS-QS-1221 1 FS-QS-1230 1 FS-QS-1231 1 FS-QS-1240 1 FS-QS-1241 1 FS-QS-1X50 1	RS-2321 RS-4852 RS-4223 FS-QS-1X11 1 1 FS-QS-1221 1 1 FS-QS-1221 1 1 FS-QS-1230 1 1 FS-QS-1231 1 1 FS-QS-1240 1 1 FS-QS-1240 1 1 FS-QS-1250 1	Interface C RS-232 ¹ RS-485 ² RS-422 ³ KNX ⁶ FS-QS-1X11 1	Interface Connection RS-232 ¹ RS-485 ² RS-422 ³ KNX ⁶ RS-485 FS-QS-1X11 1	Interface Connections RS-2321 RS-485 ² RS-422 ³ KNX ⁶ RS-485 M-Bus FS-QS-1X11 1 <td>Interface Connections RS-232¹ RS-485² RS-422³ KNX⁶ RS-485 M-Bus Ethernet⁴ FS-QS-1X11 1 1 1 1 1 1 FS-QS-1221 1 1 1 1 1 1 1 FS-QS-1230 1 1 1 1 1 1 1 FS-QS-1231 1 1 1 1 1 1 1 FS-QS-1240 1 1 1 1 1 1 1 FS-QS-1240 1 1 1 1 1 1 1 FS-QS-1241 1 1 1 1 1 1 1</td>	Interface Connections RS-232 ¹ RS-485 ² RS-422 ³ KNX ⁶ RS-485 M-Bus Ethernet ⁴ FS-QS-1X11 1 1 1 1 1 1 FS-QS-1221 1 1 1 1 1 1 1 FS-QS-1230 1 1 1 1 1 1 1 FS-QS-1231 1 1 1 1 1 1 1 FS-QS-1240 1 1 1 1 1 1 1 FS-QS-1240 1 1 1 1 1 1 1 FS-QS-1241 1 1 1 1 1 1 1

Specifications

Environment

Operating temperature: -40 to 75°C (-40 to 167°F) Relative humidity: 5-90% RH non-condensing

Power Requirements

9-30VDC or 12-24VAC (RS-422 = 15-30VDC or 12-24VAC)

(M-Bus = 12-24VDC)

Current draw: @ 12V FS-QS-12X0: 240 mA FS-QS-1X11, FS-QS-12X1: 250 mA FS-QS-1230: 200 mA @ 15V

FS-QS-1231: 210 mA @ 15V M-Bus:

Slave: 550 mA @ 12V Master (1 Slave): 580 mA @ 12V Master (64 Slave): 980 mA @ 12V

Serial Port Isolation

- 1500v galvanic isolation

Capacity

FS-QS-13XX: 3000 points FS-QS-11XX: 250 points FS-QS-12XX: 500 points FS-QS-14XX: 5000 points

Physical Dimensions

H x W x D: 4.5 x 2.9 x 1.6 in. (11.5 x 7.4 x 4.1 cm) Weight: 0.4 lbs (0.2 Kg)

Other

Configuration/Diagnostic utilities

Table, Wall or DIN rail mount

Communication

Baud: 4800, 9600, 19200, 38400, 57600, 115200 Start Bit: 7.8

Stop Bit: 1, 2

Parity: Even, Odd, None

LonMark Certification on the

QuickServer FS-QS-1XX1-XXX

SPID: 80:00:95:46:00:84:04:01

Profiles: 0000 - Node object (1) 0001 - Open Loop Sensor Object (5) 0003 - Open Loop Actuator Object (5)

Ethernet: 10/100 BaseT


Approvals

CE and FCC Class B & C Part 15 BTL Marked LonMark Certified (FS-QS-1011 and FS-QS-12X1) UL 916 and CAN/CSA C22.2 **RoHS3 and WEEE Compliant** GOST-R Certified IC Canada & KC Certification



*Specifications subject to change without notice

Ordering Information: The following part number is essential in selection of the correct product. Please build up the desired part by inserting the code for each element into the appropriate space (i.e. FS-QS-1A10-XXXX).

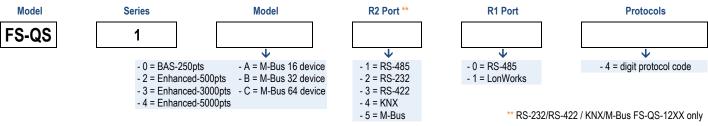

Options

The Accessory Kit consists of a power supply, Ethernet cable, screwdriver, DIN rail mount, and a USB flash drive that includes all manuals, data sheets, notes, and the discovery tool.

FS-8915-36-QS Accessory Kit, 110/220V

Warning: This equipment is compliant with Class A of CISPR 32. In a residential environment, this equipment may cause radio interference

www.sierramonitor.com

		LonWorks® is a trademark of Echelon Corporation Metasys® is a trademark of Johnson Controls	BACnet® is a trademark of ASHRAE KNX is a trademark of KNX Association
	MSA Safety		
O . +1 408 262-6611	10/20		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Gateways category:

Click to view products by Sierra Monitor manufacturer:

Other Similar products are found below :

 BB-SG30000324-51
 MTCDTIP-LEU1-275L-868
 MTCDT-LEU1-246A-868-EU-GB
 WOP-2000G-N2AE
 ESRP-PCS-ECU1251
 BB

 SG30300525-42
 BB-SG30500520-42
 TRB140003000
 SGX5150202US
 SGX5150102US
 RG191
 UPS-EDGE-X70864-U01
 UPS-EDIOT

 X70864-UW01
 ADAM-4572-CE
 ADAM-6717-A
 ECU-1152-R11ABE
 EKI-1222-CE
 EKI-1224CI-CE
 ICR-3201
 ICR-3201-W
 ICR-3211B

 UNO-220-P4N1AE
 UNO-2271G-W1032GE
 WISE-3310-D100L1E
 WISE-3610ILS-51A1N
 WISE-6610-E100-A
 WISE-6610-N100-A

 AKX00016
 MESR901
 MESR902T
 X2-HMU-EM-B
 X4-Z1U-B101-A
 SGX5150020US
 SGX51501M2ES
 SGX51502N5ES
 XPC240200B-02

 02
 XPC240400B-02
 XPC240100S-02
 XPC240300S-02
 XPC240400S-02
 XPC250100S-02
 XPE200100S
 WSDA-2000

 WSDA-200-USB
 1120780001
 1120780002
 MTCDT-246A-868-EU-GB
 MTCDT-247A-868-EU-GB
 MTCDT-L4N1-247A-915-US