

Features

- Transient protection for single line
IEC 61000-4-2 (ESD) $\pm 30\text{kV}$ (Air)
 $\pm 30\text{kV}$ (Contact)
IEC 61000-4-5 (Surge) 100A (8/20 μs)
- For 12V and below operating voltage
- Protects one data, control or power line
- Capacitance: 680pF (Typical)
- Low leakage current: 0.1 μA @ V_{RWM} (Max)
- Low clamping voltage
- Each pin can withstand over 1000 ESD strikes for $\pm 8\text{kV}$ contact discharge

Description

SYS22V12SLC is a single line Transient Voltage Suppressor (TVS) designed to provide electrostatic discharge (ESD) protection for cell phones, notebook computers, PDA's. The SYS22V12SLC is designed to protect sensitive semiconductor components from damage or upset due to electrostatic discharge (ESD) and other over-current transient events. It complies with IEC 61000-4-2 (ESD)($\pm 30\text{kV}$ air, $\pm 30\text{kV}$ contact discharge), IEC 61000-4-5 (Surge) 100A (8/20 μs), etc.

SYS22V12SLC is in DFN1.6*1.0-2 package with working voltage of 12 volts. SYS22V12SLC can protect one unidirectional line. It offers system designers flexibility to protect single data line. SYS22V12SLC can be used in lots of applications.


Applications

- Power supply protection
- Power management
- Battery protection
- Desktops, Servers and Notebooks
- Cellular Phones
- Portable Instrumentation
- Pagers Peripherals
- Digital cameras


Mechanical Characteristics

- DFN1.6*1.0-2 package
- Flammability Rating: UL 94V-0
- Marking: Device code, date code
- Packaging: Tape and Reel

Circuit Diagram



Pin Configuration

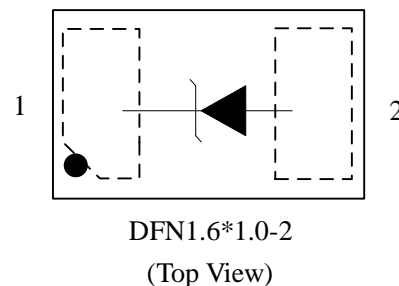


Absolute Maximum Rating

Symbol	Parameter	Value	Units
P_{PK}	Peak Pulse Power ($t_p=8/20\mu s$)	2000	Watts
I_{PP}	Peak Pulse Current ($t_p=8/20\mu s$)	100	A
V_{ESD}	ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	± 30 ± 30	kV
T_{OPT}	Operating Temperature	-40/+125	$^{\circ}C$
T_{STG}	Storage Temperature	-55/+150	$^{\circ}C$

Electrical Characteristics (T A= 25 $^{\circ}C$)

Symbol	Parameter
V_{RWM}	Nominal Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Reverse Breakdown Voltage @ I_T
I_T	Test Current for Reverse Breakdown
V_C	Clamping Voltage @ I_{PP}
I_{PP}	Maximum Peak Pulse Current
C_{ESD}	Parasitic Capacitance
V_R	Reverse Voltage
f	Small Signal Frequency
I_F	Forward Current
V_F	Forward Voltage @ I_F

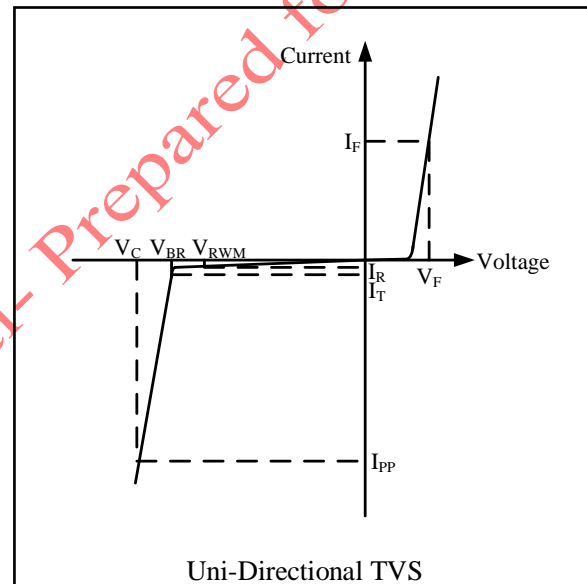


Symbol	Test Condition	Minimum	Typical	Maximum	Units
V_{RWM}				12.5	V
I_R	$V_{RWM} = 12V, T = 25^{\circ}C$ Pin1 to Pin2		0.01	0.1	μA
V_{BR}	$I_T = 1mA$ Pin1 to Pin2	13.3	14	16.5	V
V_F	$I_F = 1mA$ Pin2 to Pin1	0.4		1.2	V
V_C^1	$I_{PP} = 10A, t_p = 8/20\mu s$ Pin1 to Pin2		16		V
V_C^1	$I_{PP} = 100A, t_p = 8/20\mu s$ Pin1 to Pin2		20		V
C_{ESD}^1	$V_R = 0V, f = 1MHz$ Pin1 to Pin2		680		pF


NOTES

¹Guaranteed by design and not subject to production test.


Voltage Sweeping

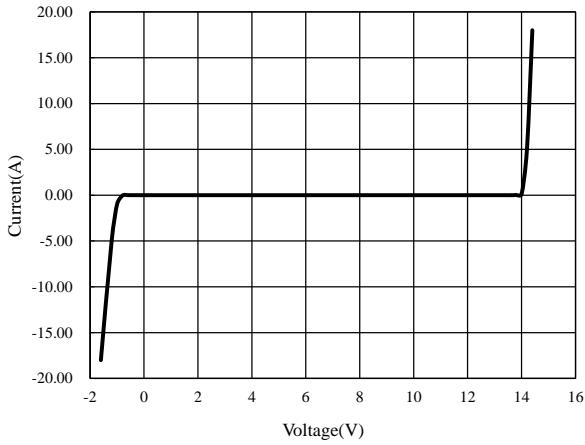


Capacitance vs. Voltage (f = 1MHz)

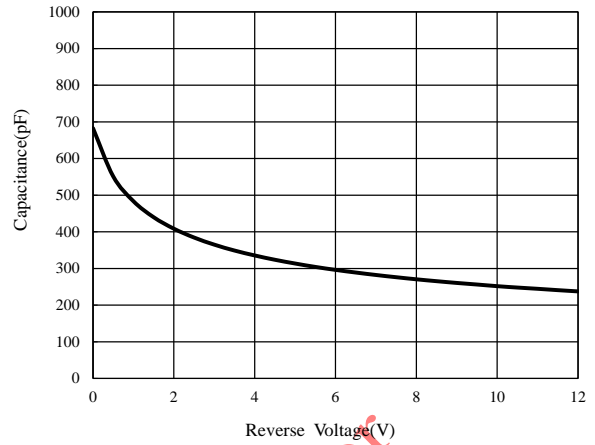


8/20µs Pulse Waveform

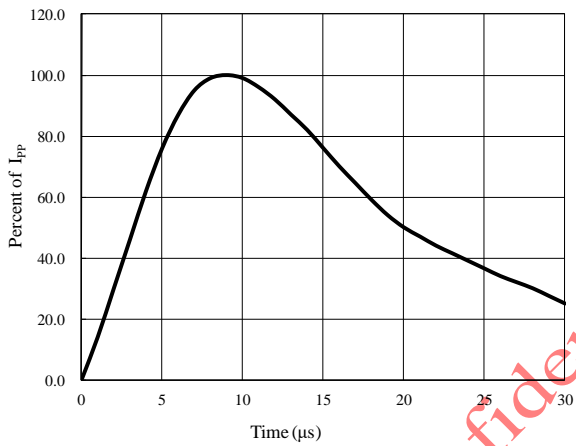


Clamping Voltage vs. Peak Pulse Current

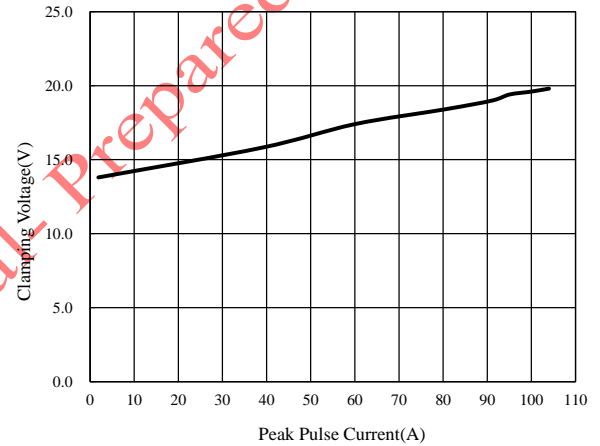

ESD Clamping (+8kV Contact per IEC 61000-4-2)

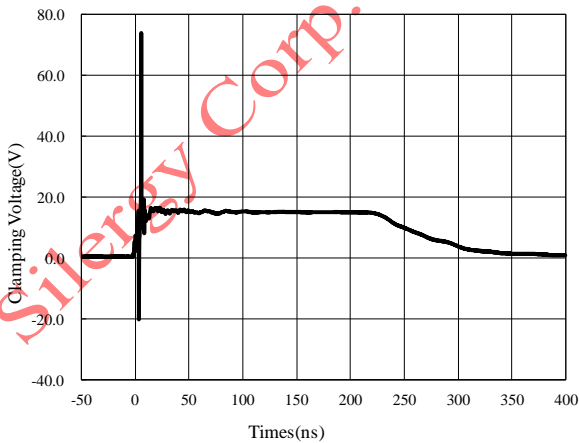


ESD Clamping (-8kV Contact per IEC 61000-4-2)

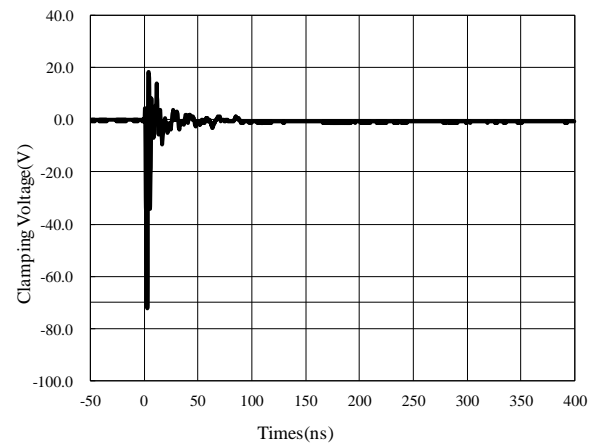

Package Outline

- DFN1.6*1.0-2L package

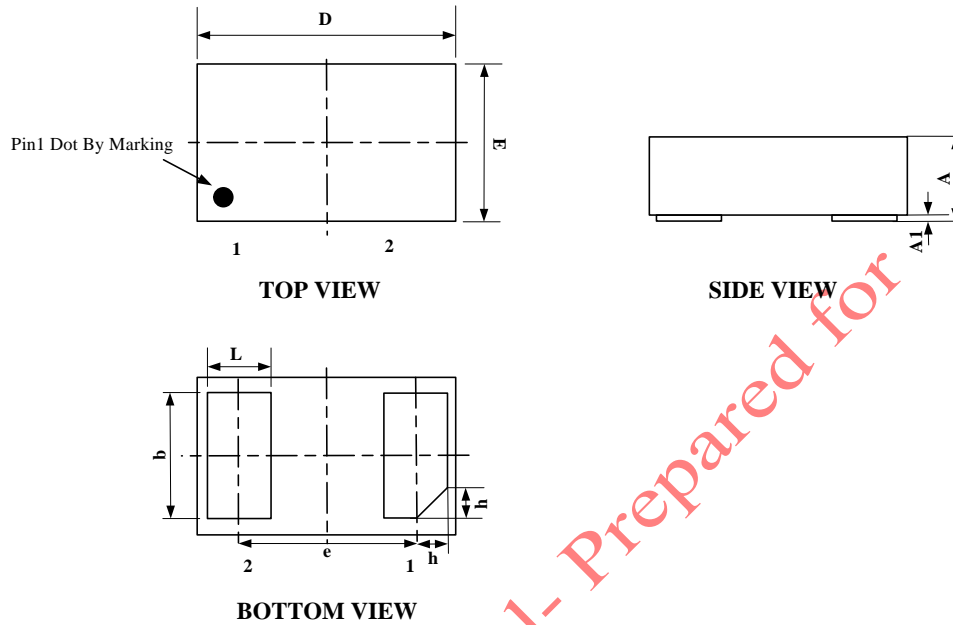


Package Dimensions

Symbol	Dimensions (mm)		
	MIN	NOM	MAX
A	0.450	0.500	0.550
A1	-----	-----	0.055
b	0.750	0.800	0.850
D	1.550	1.600	1.650
e	1.100BSC		
E	0.950	1.000	1.050
L	0.350	0.400	0.450
h	0.175BSC		

Notes: All dimension in mm and exclude mold flash & metal burr.

Tape and Reel Specification

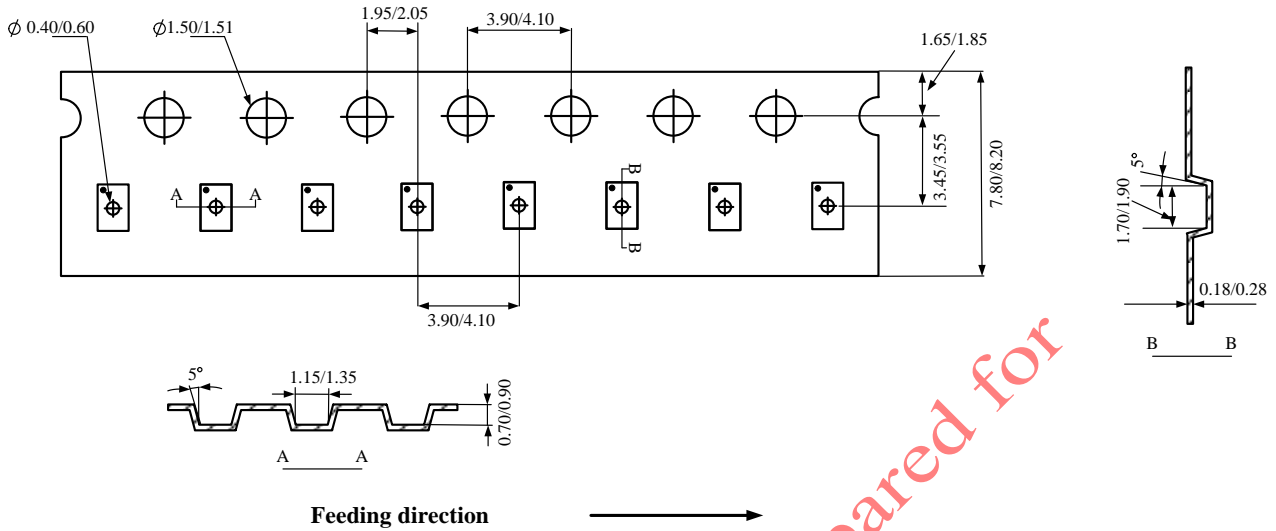

Package types	Tape width (mm)	Pocket pitch(mm)	Reel size (Inch)	Trailer * length(mm)	Leader * length (mm)	Qty per reel (pcs)
DFN1.6*1.0-2	8	4	7"	400	400	3000

Marking Codes



Ordering Information

Part Number	Working Voltage	Quantity Per Reel	Reel Size
SYS22V12SLC	12V	3,000	7 Inch

Note:

- (1) "W" is the device marking for SYS22V12SLC.
- (2) "YWA" is date code.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Silergy](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#) [JANTX1N6053A](#)
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [JANTX1N6462](#) [JANTX1N6465](#) [USB50805e3/TR7](#)
[D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SM1605E3/TR13](#)
[SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#)
[CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL E6327](#) [824500181](#) [MMAD1108/TR13](#) [5KP100A](#)