

WT12 EVALUATION KIT

DATA SHEET

Monday, 09 September 2013

Version 1.7

Copyright © 2000-2013 Bluegiga Technologies

All rights reserved.

Bluegiga Technologies assumes no responsibility for any errors which may appear in this manual. Furthermore, Bluegiga Technologies reserves the right to alter the hardware, software, and/or specifications detailed here at any time without notice and does not make any commitment to update the information contained here. Bluegiga's products are not authorized for use as critical components in life support devices or systems.

The WRAP, Bluegiga Access Server, Access Point and iWRAP are registered trademarks of Bluegiga Technologies.

The *Bluetooth* trademark is owned by the Bluetooth SIG Inc., USA and is licensed to Bluegiga Technologies. All other trademarks listed herein are owned by their respective owners.

VERSION HISTORY

Version	Comment
1.0	MSa
1.1	NM
1.2	PR
1.3	MSa
1.4	MSa
1.5	MSa
1.6	MSa
1.7	Table 2 corrected

TABLE OF CONTENTS

WT12 Evaluation Kit	1
Data Sheet	1
1 Introduction	5
2 Physical outlook.....	6
3 Schematics	7
4 Assembly	7
5 Gerber	7
6 SPI (J1) interface.....	8
7 GPIO (J2) interface.....	9
8 PIO SELECT (J3)	10
9 RESET (J4)	10
10 DSR (J5)	10
11 Speaker JACK (J6)	11
12 Microphone JACK (J7).....	11
13 SIG Select (J8)	11
14 RS-232 (J9) DTE interface	12
15 USB (J10) interface	13
16 Power supply (J11)	13
17 Power supply (J12)	13
18 Contact Information	14

1 Introduction

WT12 Development Kit Contents:

- WT12 development board containing:
 - WT12 *Bluetooth* Module
 - RS232 and USB interfaces
 - PCM codec and 3.5mm audio jacks
 - 16 pin IO header
 - Unregulated power supply input (5-9V)
 - Debug connector for firmware updates
 - 3,5mm audio jacks for speaker and microphone connection
- RS232 cable
- Debug cable for firmware updates
- Documentation
- Preinstalled with latest iWRAP *Bluetooth* software

2 Physical outlook

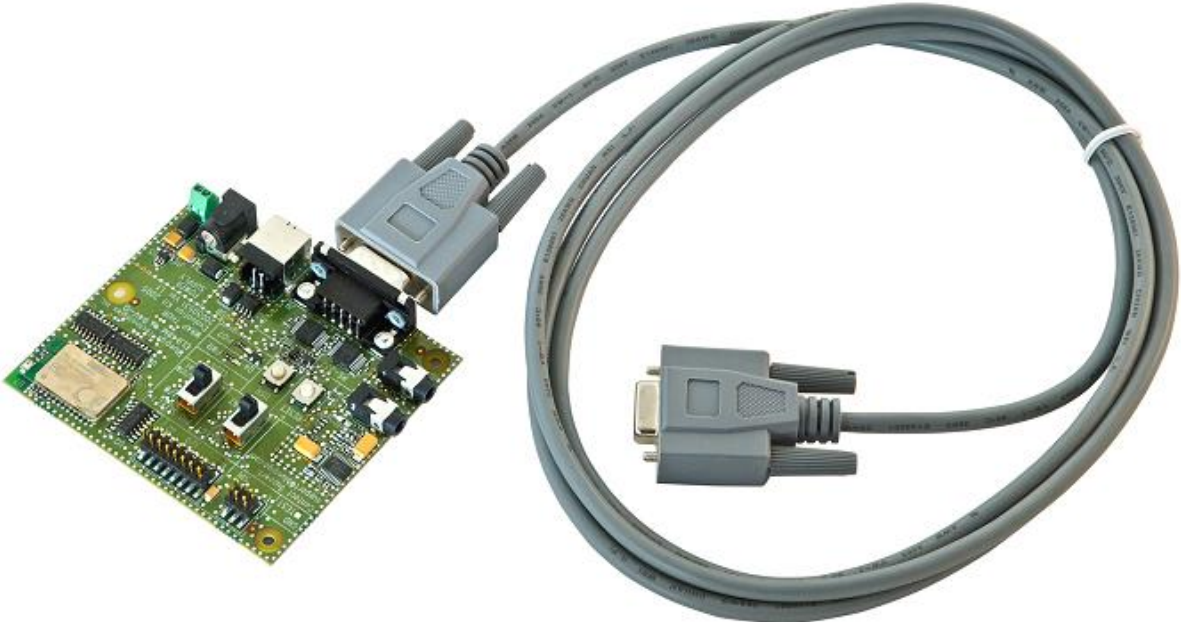


Figure 1: WT12 Development Kit

3 Schematics

Schematics of WT12 Evaluation Kit can be found from the CD delivered with the package or alternatively downloaded from <http://techforum.bluegiga.com>

4 Assembly

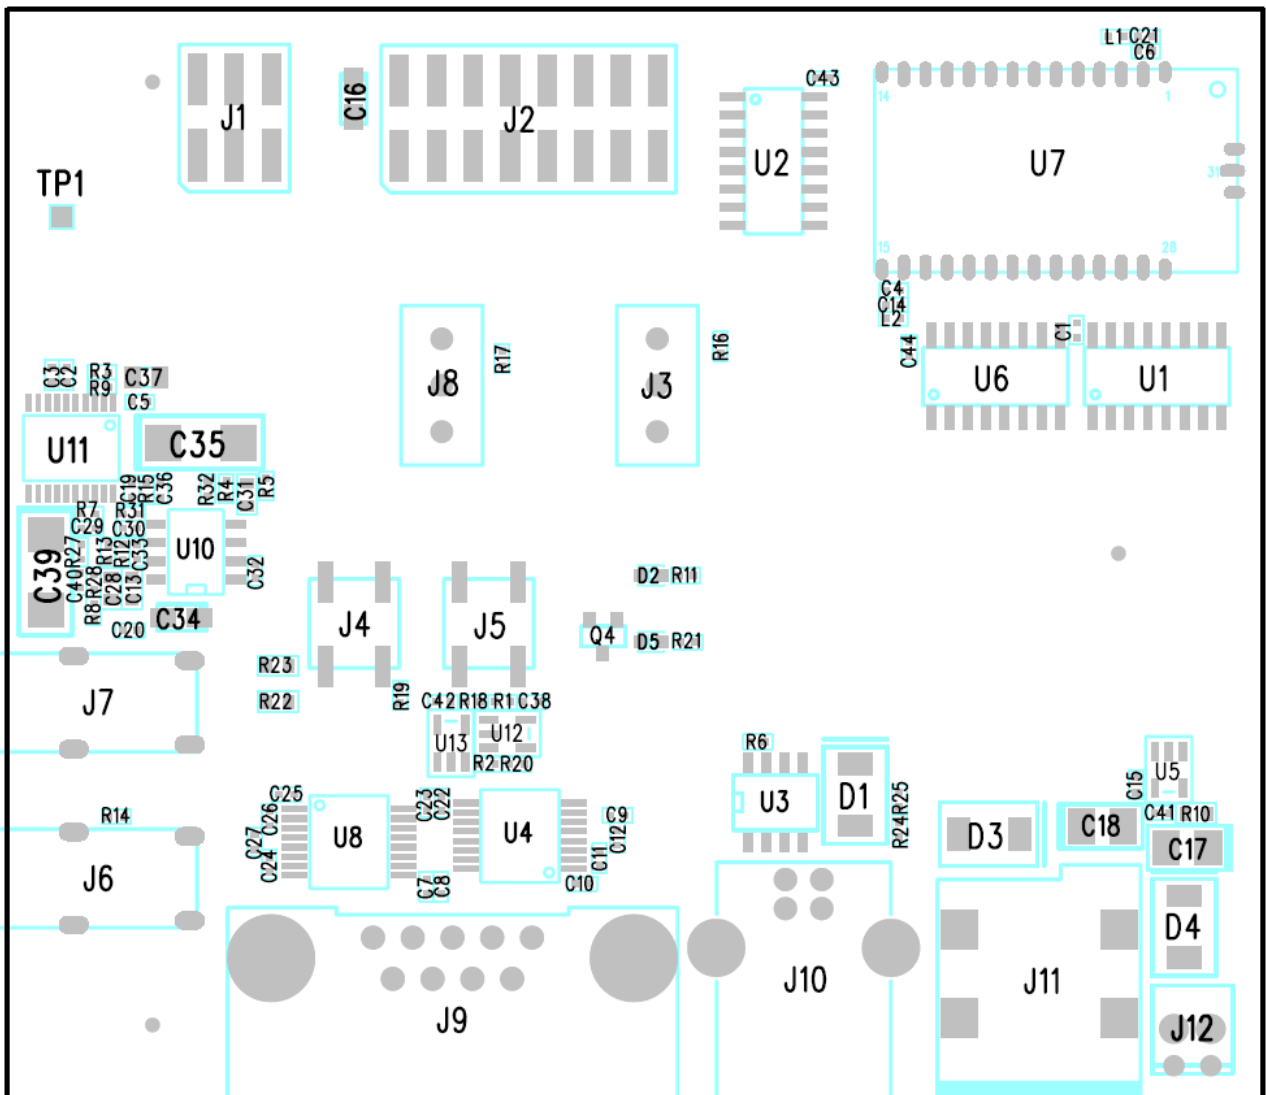


Figure 2: WT12 Evaluation Kit assembly

5 Gerber

Gerber of WT12 Evaluation Kit can be found from the CD delivered with the package or alternatively downloaded from <http://techforum.bluegiga.com>.

6 SPI (J1) interface

SPI interface pin configuration is show in Table 2. The physical interface is 2X3 pin header (AMP146134-2).

PIN Name:	No.:	I/O:	Description:
MISO	1	O	MISO
3.3 V	2	POWER	3.3 V power supply input
CLK	3	I	CLK
MOSI	4	I	MOSI
CSB	5	I	CSB
GND	6	GND	GND

Table 1: SPI Interface PIN description

7 GPIO (J2) interface

General purpose interface pin configuration is show in Table 2. The physical interface is 2X8 pin header (AMP146134-7).

PIN Name:	No.:	I/O:	Description:
RESET	1	I	Reset
3.3 V	2	POWER	Regulated power supply output (3.3 V)
PIO2	3	I/O	Programmable IO number 2
PIO3	4	I/O	Programmable IO number 3
PIO4	5	I/O	Programmable IO number 4
PIO5	6	I/O	Programmable IO number 5
PIO6	7	I/O	Programmable IO number 6
PIO7	8	I/O	Programmable IO number 7
RTS	9	O	UART RTS
CTS	10	I	UART CTS
GND	11	GND	GND
GND	12	GND	GND
TxD	13	O	UART TX
RxD	14	I	UART RX
GND	15	GND	GND
+V	16	POWER	Unregulated power supply input/output (5-9 V)

Table 2: GPIO interface PIN description

8 PIO SELECT (J3)

This switch toggles PIO2 to PIO7 signal connections between J2 connector and LED/USB/UART interfaces.

Note: 'Top' and 'bottom' positions refer to viewing WT12 Evaluation Kit from top side as seen in Figure 2.

- Top position must be used when WT12 module is interfaced through J2 connector.
- Bottom position is used when WT12 module is interfaced through the DB9 RS232 connector or if USB port or if link state LED is used.

J3 Switch top position:

- PIO2 connects to pin 3 on the J2 interface
- PIO3 connects to pin 4 on the J2 interface
- PIO4 connects to pin 5 on the J2 interface
- PIO5 connects to pin 6 on the J2 interface
- PIO6 connects to pin 7 on the J2 interface
- PIO7 connects to pin 8 on the J2 interface

J3 Switch bottom position:

- PIO2 connects to USB_IO1
- PIO3 connects to nDTR-UART
- PIO4 connects to nCD-UART
- PIO5 connects to nDSR-MUX
- PIO6 connects to VBUS
- PIO7 connects to blue LED on the board marked with PIO7

9 RESET (J4)

The RESET button resets the module using the reset pin on the WT12.

10 DSR (J5)

The DSR button is connected to PIO5 pin on the WT12. Thus, when you want to use the DSR signal, please refer to the iWRAP 2.1.0 manual. The use of DSR signal is described under SET CONTROL ESCAPE chapter.

11 Speaker JACK (J6)

Connect your generic PC headset's 3,5mm speaker plug here.

12 Microphone JACK (J7)

Connect your generic PC headset's 3,5mm headphone plug here.

13 SIG Select (J8)

This switch toggles nCTS and RxD signals connection between J2 connector and DB9 RS232 connector.

Note: 'Top' and 'bottom' positions refer to viewing WT12 Evaluation Kit from top side as seen in Figure 2.

- Top position must be used when external WT12 module's nCTS and RxD pins are interfaced through J2 connector.
- Bottom position must be used when WT12 is interfaced through the DB9 RS232 connector.

J8 Switch top position:

- nCTS connects to pin 10 on the GPIO (J2) interface
- RxD connects to pin 14 on the GPIO (J2) interface

J8 Switch bottom position:

- nCTS connects to nCTS-UART
- RxD connects to RXD-UART

14 RS-232 (J9) DTE interface

RS-232 interface PIN configuration is shown in Table 1. The physical interface is D9-male connector (AMP747840-4).

PIN Name:	No.:	I/O:	Description:
NC	1	NC	Not connected
RxD	2	I	RxD
TxD	3	O	TxD
DTR	4	O	DTR on
GND	5	GND	Ground
NC	6	NC	Not connected
RTS	7	O	RTS
CTS	8	I	CTS
NC	9	NC	Not connected

Table 3: RS232 PIN configuration

15 USB (J10) interface

J10 connector is a standard USB B receptacle connector.

16 Power supply (J11)

This connector is used with the 5V power supply delivered with the evaluation kit. Diameter 6.0mm, inner pin diameter 2.0mm.

17 Power supply (J12)

This connector can be used for external power supply. Power supply must be 5-9V unregulated.

18 Contact Information

Sales: sales@bluegiga.com

Technical support: <http://techforum.bluegiga.com>

Orders: orders@bluegiga.com

WWW: www.bluegiga.com
www.bluegiga.hk

Head Office / Finland:

Phone: +358-9-4355 060
Fax: +358-9-4355 0660
Sinikalliontie 5A
02630 ESPOO
FINLAND

Postal address / Finland:

P.O. BOX 120
02631 ESPOO
FINLAND

Sales Office / USA:

Phone: +1 770 291 2181
Fax: +1 770 291 2183
Bluegiga Technologies, Inc.
3235 Satellite Boulevard, Building 400, Suite 300
Duluth, GA, 30096, USA

Sales Office / Hong-Kong:

Phone: +852 3182 7321
Fax: +852 3972 5777
Bluegiga Technologies, Inc.
19/F Silver Fortune Plaza, 1 Wellington Street,
Central Hong Kong

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bluetooth Development Tools - 802.15.1 category](#):

Click to view products by [Silicon Labs manufacturer](#):

Other Similar products are found below :

[DA14580PRODTLKT](#) [1628](#) [MBH7BLZ02-EF-KIT](#) [CYBLE-014008-PROG](#) [FWM7BLZ20-EB-KIT](#) [ATSAMB11ZR-XPRO](#) [SKY66111-21EK1](#) [SECO-RSL10-TAG-GEVB](#) [ENW89857AXKF](#) [3026](#) [MIKROE-2471](#) [MOD-NRF8001](#) [BLE-IOT-GEVB](#) [450-0184](#) [MIKROE-2399](#) [EKSHCNZXZ](#) [EVAL_PAN1026](#) [EVAL_PAN1720](#) [EVAL_PAN1740](#) [2267](#) [2479](#) [2487](#) [2633](#) [STEVAL-IDB005V1D](#) [STEVAL-IDB001V1](#) [MIKROE-2545](#) [SIPKITSLF001](#) [2995](#) [STEVAL-IDB007V1M](#) [2829](#) [DFR0267](#) [DFR0296](#) [DFR0492](#) [TEL0073](#) [BM-70-CDB](#) [WSM-BL241-ADA-008DK](#) [STEVAL-BTDP1](#) [ACD52832](#) [TEL0095](#) [ISP1507-AX-TB](#) [RN-4871-PICTAIL](#) [DA14695-00HQDEVKT-P](#) [DA14695-00HQDEVKT-U](#) [EVK-NINA-B112](#) [EBSHJNZXZ](#) [EKSHJNZXZ](#) [BMD-200-EVAL-S](#) [ACN BREAKOUT BOARD](#) [ACN SKETCH](#) [2269](#)