


### Overview

Redpine Signals WiSeMCU™ Evks have an integrated ultra-low power Cortex-M4F, a comprehensive wireless sub-system, advanced security, a rich set of analog and digital peripherals as well as a power management system. The wireless subsystem provides dual band Wi-Fi (2.4/5 GHz, 802.11abgn 1x1), Bluetooth 4.1/5 connectivity. The integrated Cortex-M4F is dedicated to customer applications, has up to 4 MB flash and can operate up to 180 MHz. There is support for Kiel and IAR IDEs for customer applications.

### Solution Highlights

- Efficient on-chip application processor based on ARM® Cortex®-M4F with up to 180 MHz performance, up to 4 MB dedicated flash
- Co-existence of multiple wireless protocols including 802.11a/b/g/n (2.4 GHz and 5 GHz), dual-mode Bluetooth 5
- Ultra-low power consumption with multiple power modes to reduce the system energy consumption
- Multiple levels of security including PUF (Physically Unclonable Function), Crypto HW accelerators, Secure Bootloader and Secure Zone to create a highly secure system
- Integrated networking and wireless stacks for ease of integration
- Leading edge RF performance providing long range and higher throughputs
- Unique peripherals like ULP sub-system, voice activity detection (VAD) and up to 8 capacitive touch sensor inputs

### Evaluation Kit

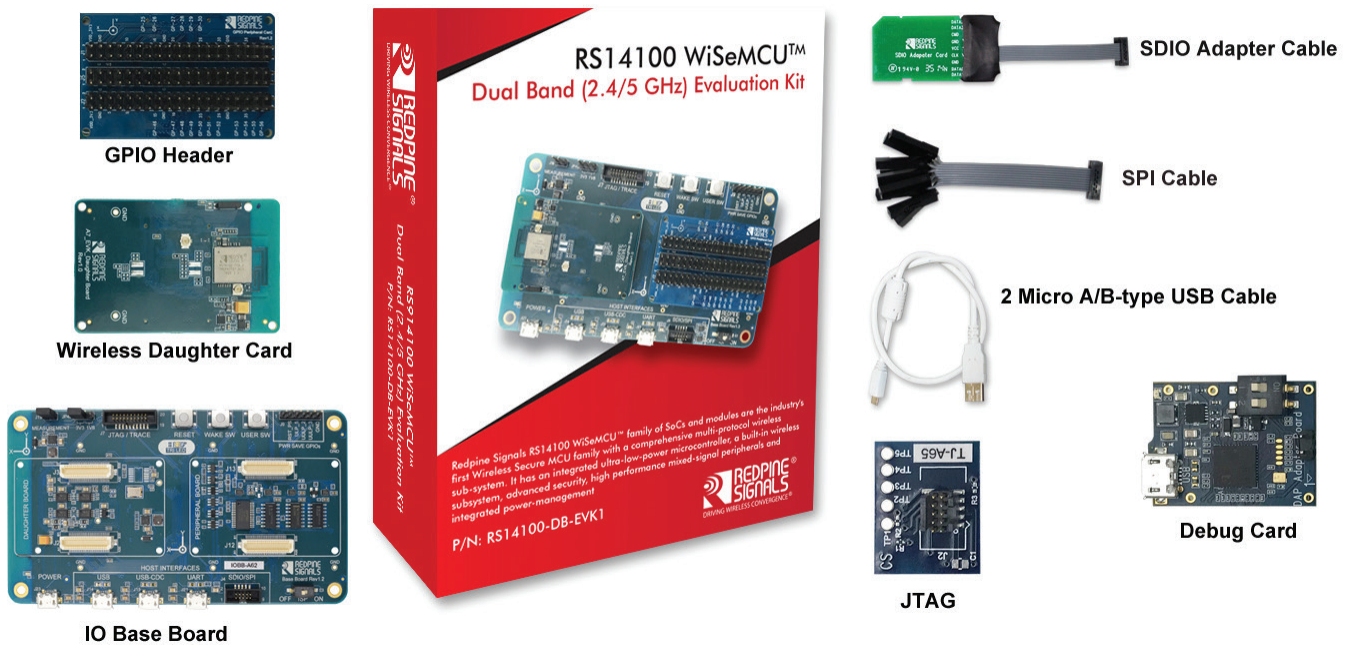

### Evaluation Kit Contents:

The RS14100 Evaluation Kit comes with the following components:

#### Hardware

- SDIO Adapter Cable
- SPI Cable
- 2 Micro A/B-type USB Cable
- RS14100 IO Base Board
- Wireless Daughter Card
- GPIO Header
- JTAG
- Debug Card

#### Software & Documentation


- Wireless Simple APIs (SAPI) based examples
- Demo examples for faster evaluation

Please login to [www.redpinesignals.com](http://www.redpinesignals.com) Software & Documentation.

## Ordering Information:

- Single band P/N: RS14100-SB-EVK1
- Dual band P/N: RS14100-DB-EVK1

## Evaluation Board:

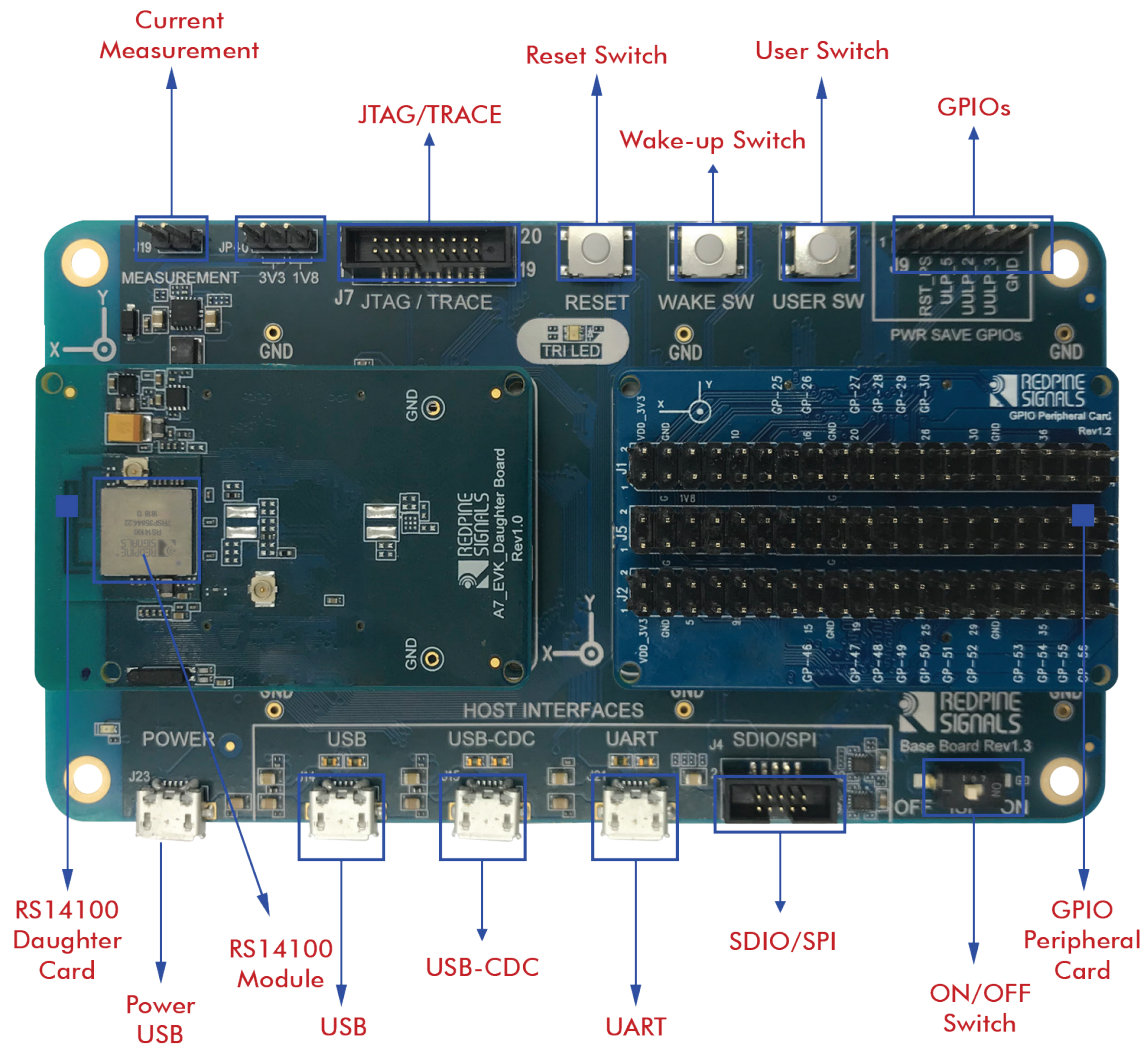

Redpine Signals, Inc.  
2107 North First Street, Suite #540, San Jose, California 95131, United States of America.  
Phone: +1-408-748-3385 | Fax: +1-408-705-2019  
Email: sales@redpinesignals.com | Website: www.redpinesignals.com



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Development Boards & Kits - Wireless](#) category:*

*Click to view products by [Silicon Labs](#) manufacturer:*

Other Similar products are found below :

[TWR-13237-KIT](#) [K32W-001-T10](#) [C METER CLICK](#) [HALL CURRENT CLICK](#) [COLOR 3 CLICK](#) [COMPASS 2 CLICK](#) [HDC1000 CLICK](#) [RFID CLICK](#) [RIVERDI CLICK](#) [CUGSM113#UFL](#) [MATRIX G CLICK](#) [MATRIX RGB CLICK](#) [3D MOTION CLICK](#) [4-20MA R CLICK](#) [4-20MA T CLICK](#) [THERMO CLICK](#) [MCP2003B CLICK](#) [EXPAND 3 CLICK](#) [MCP2542 CLICK](#) [MCP25625 CLICK](#) [ATA663211 CLICK](#) [TOUCHKEY CLICK](#) [MICROSD CLICK](#) [TRF CLICK](#) [BUTTON R CLICK](#) [I2C ISOLATOR CLICK](#) [UNIQUE ID CLICK](#) [USB SPI CLICK](#) [CAN-SPI CLICK 3.3V](#) [CAN-SPI CLICK 5V](#) [CAP EXTEND CLICK](#) [CAPSENSE CLICK](#) [13DOF 2 CLICK](#) [13DOF CLICK](#) [DC MOTOR CLICK](#) [WIFI2 CLICK](#) [4X4 KEY CLICK](#) [RS232 CLICK](#) [RS485 CLICK 3.3V](#) [RS485 CLICK 5V](#) [RTC2 CLICK](#) [EM3588-MLR-AN-C](#) [CC3100 CLICK](#) [FLASH 3 CLICK](#) [NFC CLICK](#) [NFC TAG CLICK](#) [FLICKER CLICK](#) [NRF C CLICK](#) [SPEAKUP CLICK](#) [OLED C CLICK](#)