

Redpine Signals' RS9116 family of SoCs and modules provides a comprehensive multi-protocol wireless connectivity solution including 802.11 a/b/g/n (2.4 GHz and 5 GHz) dual-mode Bluetooth<sup>®</sup> 5.

## Solution Highlights

- Co-existence of multiple wireless protocols managed by an internal protocol arbitration manager
- Ultra-low power consumption with multiple power modes to reduce the system energy consumption
- Multiple levels of security including WPA/WPA2 Personal, WPA2 Enterprise, SSL/TLS, to create a highly secure system
- Fully integrated and wireless certified modules with multiple sizes as small as 4.63 mm x 7.90 mm
- Multiple software architectures (hosted and embedded) and host interfaces (SDIO, USB, SPI, UART) for easy integration with different processor families and operating systems
- Footprint compatible single band and dual band modules as well as hosted and embedded modules for easy migration within the product family
- Leading edge RF performance providing long range and higher throughputs

## Features

### Wi-Fi<sup>®</sup>

- Compliant to single-spatial stream IEEE 802.11 a/b/g/n with single band (2.4 GHz), and dual band (2.4 and 5 GHz) support
- Support for 20 MHz channel bandwidths
- Transmit power up to +20dBm\* with integrated PA
- Receive sensitivity as low as -97 dBm\*

### Bluetooth

- Compliant to dual-mode Bluetooth 5
- <8 mA transmit current in Bluetooth 5 mode, 2 Mbps data rate
- Data rates: 125 Kbps, 500 Kbps, 1 Mbps, 2Mbps, 3 Mbps
- Operating Frequency Range:- 2.402 GHz - 2.480 GHz
- Bluetooth 2.1 + EDR, Bluetooth Low Energy 4.0 / 4.1 / 4.2 / 5.0
- Bluetooth Low Energy 1 Mbps, 2 Mbps and Long Range modes
- Bluetooth Low Energy Secure connections
- Bluetooth Low Energy supports central role and peripheral role concurrently.
- Bluetooth auto rate and auto TX power adaptation
- Scatternet\* with two slave roles while still being visible.

### RF Features

- Integrated baseband processor with calibration memory, RF transceiver, high-power amplifier, balun and T/R switch
- Integrated Antenna and u.FL connector
- Diversity is supported

### Operating Modes

- Hosted mode (n-Link™): Wi-Fi stack, Bluetooth stack and profiles and all network stacks reside on the host processor
- Embedded mode (WiSeConnect™): Wi-Fi stack, TCP/IP stack, IP modules, Bluetooth stack and some profiles reside in RS9116; Some of the Bluetooth profiles reside in the host processor

### Hosted Mode (n-Link™)

- Available host interfaces: SDIO 2.0 and USB HS
- Support for 20 MHz and 40 MHz channel bandwidths
- Application data throughput up to 50 Mbps (Hosted Mode) in 802.11n with 20 MHz bandwidth
- Host drivers for Linux
- Support for Client mode, Access point mode (Upto 16 clients), Concurrent Client and Access Point mode, Enterprise Security

- Support for concurrent Wi-Fi, dual-mode Bluetooth 5

### Embedded Mode (WiSeConnect™)

- Available host interface: UART, SPI, SDIO\*, and USB CDC
- TCP throughput > 20Mbps over SDIO host interface with 20 MHz bandwidth
- Support for Embedded Client mode, Access Point mode (Upto 8 clients), Concurrent Client and Access Point mode, and Enterprise Security
- Supports advanced security features: WPA/WPA2-Personal and Enterprise\*
- Integrated TCP/IP stack (IPV4/IPV6), HTTP/HTTPS, DHCP, ICMP, SSL 3.0/TLS1.2, WebSockets, IGMP, DNS, DNS-SD, SNMP, FTP Client, MQTT\*
- Bluetooth inbuilt stack support for L2CAP, RFCOMM, SDP, SPP, GAP
- Bluetooth profile support\* for GAP, SDP, L2CAP, RFCOMM, SPP, GATT, PBAP
- Wireless firmware upgrade and provisioning
- Support for concurrent Wi-Fi, dual-mode Bluetooth 5

### Security

- Accelerators: AES128/256 in Embedded Mode
- WPA/WPA2-Personal, WPA/WPA2 Enterprise for Client\*
- Secure Firmware upgrade\* with backup

### Power Consumption

- Wi-Fi Standby Associated mode current: 50uA @ 1 second beacon listen interval
- Wi-Fi 1 Mbps Listen current: 14mA
- Wi-Fi LP chain Rx current: 19mA
- Deep sleep current <1uA, Standby current (RAM retention) < 10uA

## Software and Regulatory Certifications

- Wi-Fi Alliance<sup>2</sup>
- Bluetooth Qualification<sup>2</sup>
- Regulatory certifications (FCC, IC, ETSI/CE, TELEC)<sup>2</sup>

## Operating Conditions

- Single supply: 2.1 to 3.6 V or 1.85 V
- Operating temperature: -40°C to +85° C (Industrial Grade)
- 

## Packages

- Module packages with and without antenna
- SoC packages: QFN

## Evaluation Kit:

- Single band P/N: RS9116X-SB-EVK1
- Dual band P/N: RS9116X-DB-EVK1

## Package Options

### Module Packages

Package Code	Package Type	Dimensions (mm)	Frequency Band	Integrated Antenna	Note
AA0	LGA, 101	14 x 15 x 2.1	Single Band (2.4 GHz)	No	RS9113 compatible
AA1	LGA, 79	16 x 27 x 3.1	Single Band (2.4 GHz)	Antenna and u.FL Connector	RS9113 compatible
CC0	LGA, 173	9.1 x 9.8 x 1.2	Dual Band (2.4 / 5 GHz)	No	
CC1	LGA, 107	15.0 x 15.70 x 2.2	Dual Band (2.4 / 5 GHz)	Antenna and u.FL Connector	
B00	LGA, 126	4.63 x 7.90 x 0.9	Single Band (2.4 GHz)	No	
MB0	M.2, 75	22 x 30	Dual Band (2.4 / 5 GHz)	Two u.FL Connectors	
HB0	Half Mini PCIe Card, 52	26.8 x 30	Dual Band (2.4 / 5 GHz)	Two u.FL Connectors	USB interface

### SoC Packages


Package Code	Type of Package	Dimensions, Pitch (mm)	Frequency Band
QMS	QFN, 84	7 x 7 x 0.85, 0.5	Single Band (2.4 GHz)

### Part Ordering Options

Part Number	Wireless	SoC Packages (ppg)	Module Packages (ppg)
<b>Hosted Connectivity (n-Link™)</b>			
RS9116N-SB00-ppg	SBW+Bluetooth 5	QMS	AA0, AA1, B00
RS9116N-DB00-ppg	DBW+Bluetooth 5	None	CC0, CC1, MB0, HB0
<b>Embedded Connectivity (WiSeConnect™)</b>			
RS9116W-SB00-ppg	SBW+Bluetooth 5	QMS	AA0, AA1, B00
RS9116W-DB00-ppg	DBW+Bluetooth 5	None	CC0, CC1

*Note:* Replace 'ppg' with desired SoC / Module Packages code;  
**SBW:** Single Band Wi-Fi (2.4 GHz); **DBW:** Dual Band Wi-Fi (2.4/5 GHz)

## Block diagram

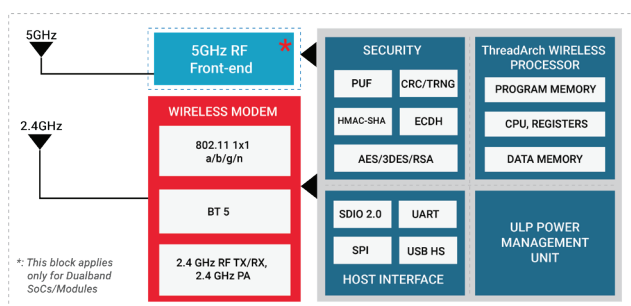

*Note:* The B2SIG certified production parts for this product family will be available in early 2019.

<sup>1</sup>: Subject to change. Contact Redpine Signals for final numbers. <sup>2</sup>:Contact Redpine for availability.

### Redpine Signals, Inc.

2107 North First Street, Suite #540, San Jose, California 95131, United States of America.

Phone: +1-408-748-3385 | Fax: +1-408-705-2019

Email: sales@redpinesignals.com | Website: www.redpinesignals.com



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [WiFi Modules - 802.11 category](#):*

*Click to view products by [Silicon Labs manufacturer](#):*

Other Similar products are found below :

[KBPC10/15/2506WP](#) [WIFI-RT5392-SB-R10](#) [SX-PCEAN2C-SP](#) [849WM520100E](#) [WIFI-AT2350](#) [7265.NGWG.SW](#) [HDG204-DN-3](#) [FXX-3061-MIX](#) [EMIO-1533-00A2](#) [7265.NGWWB.W](#) [PPC-WL-KIT02-R11](#) [RC-CC2640-B](#) [HLK-7688A](#) [E70-433T14S](#) [WH-NB73-BA](#) [NF-02-PA](#) [EAR00364](#) [ATSAMW25H18-MR210PB1961](#) [3168.NGWG](#) [MY-WF003U](#) [AX210.NGWG.NV](#) [ESP-15F32Mbit](#) [ESP32-S32Mb](#) [TG-01M](#) [ESP-13](#) [ESP-01F-2M](#) [ESP-01E-2M](#) [ESP-12S-8285-2M](#) [ESP-20](#) [ESP32-SL](#) [ESP-12K-PSRAM](#) [ESP-12K](#) [ESP-12K-PSRAM-IPEX](#) [ESP-12H](#) [BW18](#) [BW12-16Mb](#) [BW14](#) [BW15](#) [BW16](#) [TG-12F](#) [SIM7600CE-L1S](#) [CB3S\(tjrl\)](#) [CB3S\(hvk9\)](#) [CB3S\(qh6\)](#) [WB2S\(csyd\)](#) [WB3S\(ppty\)](#) [WB3S\(h238\)](#) [WB3S\(uvmz\)](#) [1005869](#) [1012](#)