

### Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	$I_D$
150V	6.2mΩ@10V	140A


### Feature

- Fast Switching
- Low Gate Charge and Rds(on)
- 100% Single Pulse avalanche energy Test

### Applications


- Power switching application
- DC-DC Converter
- Power Management

### Package




TO-263(1:G 2:D 3:S)

### Circuit diagram



### Marking



015N06GH : Product code  
\*\* : Week code

**Absolute maximum ratings (Ta=25°C, unless otherwise noted)**

Parameter	Symbol	Rating	Unit
Drain source voltage	$V_{DS}$	150	V
Gate source voltage	$V_{GS}$	$\pm 20$	V
Continuous drain current(Tc=25°C)	$I_D$	140	A
Pulsed drain current	$I_{DM}$	560	A
Power dissipation(Tc=25°C)	$P_D$	280	W
Single pulsed avalanche energy <sup>1)</sup>	$E_{AS}$	1056	mJ
Thermal resistance, junction-case	$R_{\theta JC}$	0.44	°C/W
Operation and storage temperature	$T_{stg}, T_j$	-55 to 150	°C







**Electrical characteristics (Ta=25°C, unless otherwise noted)**






Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit
<b>Static Characteristics</b>						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$I_D = 250\mu A, V_{GS} = 0V$	150	-	-	V
Drain Cut-Off Current	$I_{DSS}$	$V_{DS} = 120V, V_{GS} = 0V$	-	-	1	$\mu A$
Gate Leakage Current	$I_{GSS}$	$V_{GS} = \pm 20V, V_{DS} = 0V$	-	-	$\pm 0.1$	
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.0	3.0	4.0	V
Drain-Source ON Resistance	$R_{DS(ON)}$	$V_{GS} = 10V, I_D = 20A$	-	6.2	7.5	m $\Omega$
<b>Dynamic Characteristics</b>						
Input Capacitance	$C_{iss}$	$V_{DS} = 75V, V_{GS} = 0V, f = 1.0MHz$	-	5280	-	$pF$
Output Capacitance	$C_{oss}$		-	653	-	
Reverse Transfer Capacitance	$C_{rss}$		-	24	-	
<b>Switching Characteristics</b>						
Total Gate Charge	$Q_g$	$V_{DS} = 75V, V_{GS} = 10V, I_D = 70A$	-	80	-	$nC$
Gate-Source Charge	$Q_{gs}$		-	33	-	
Gate-Drain Charge	$Q_{gd}$		-	21	-	
Turn-On Delay Time	$t_{d(on)}$	$V_{GS} = 10V, V_{DS} = 75V, R_L = 3\Omega, R_G = 4.7\Omega$	-	26	-	$ns$
Rise Time	$t_r$		-	35	-	
Turn-Off Delay Time	$t_{d(off)}$		-	45	-	
Fall Time	$t_f$		-	17	-	
<b>Drain-Source Body Diode Characteristics</b>						
Source-Drain Diode Forward Voltage	$V_{SD}$	$I_S = 1A, V_{GS} = 0V$	-	-	1.2	V

Note:


- $E_{AS}$  is tested at starting  $T_j = 25^\circ C, V_{DD} = 75V, V_{GS} = 10V, L = 0.5mH, R_g = 25\Omega$ ;

**Typical Characteristics**

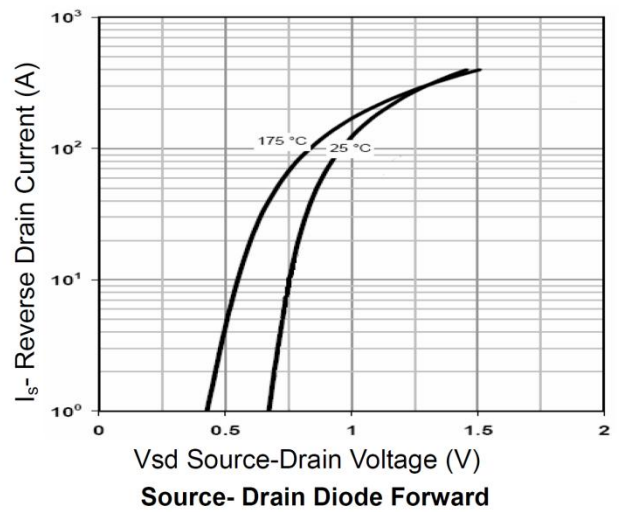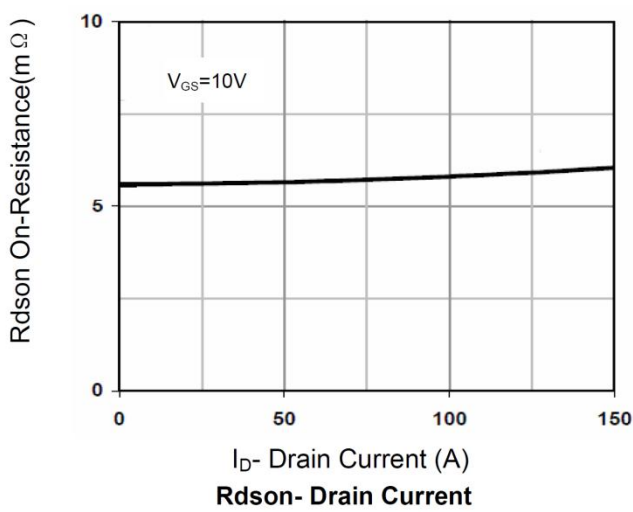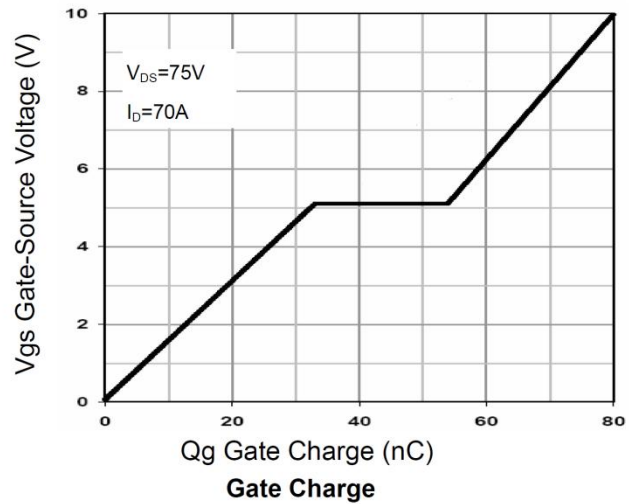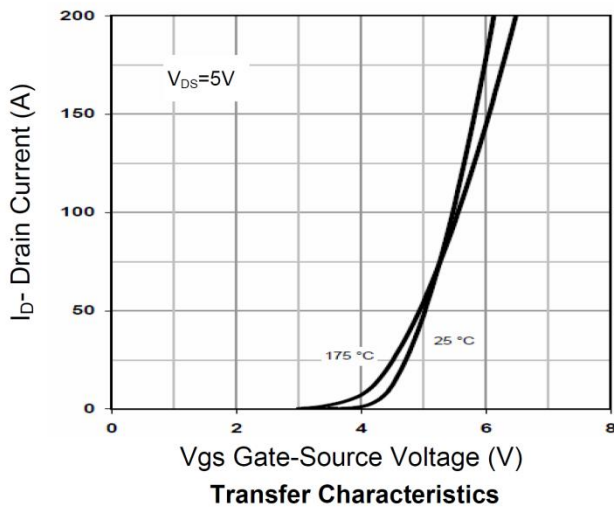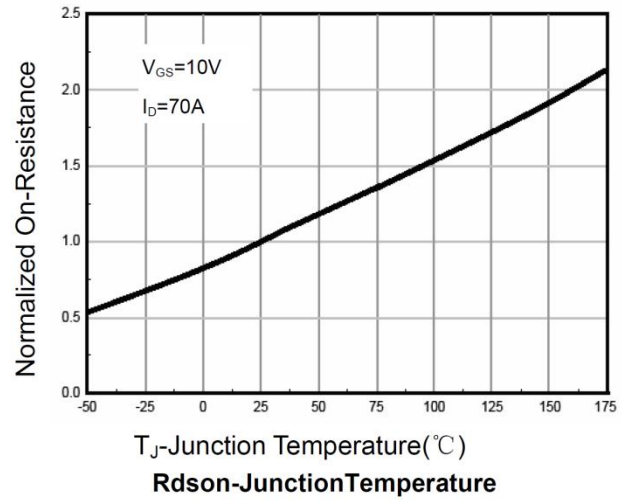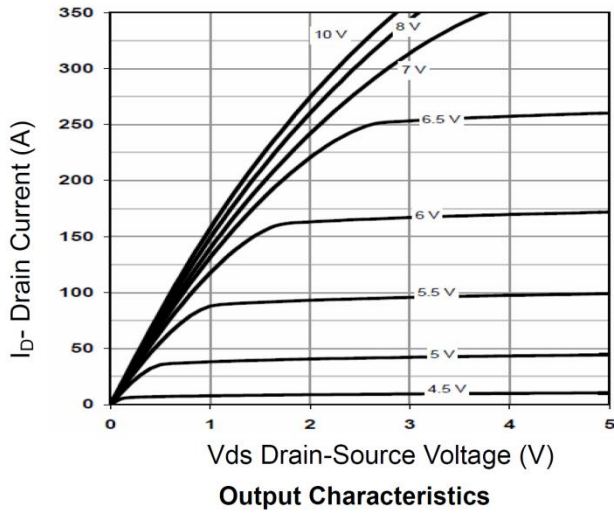

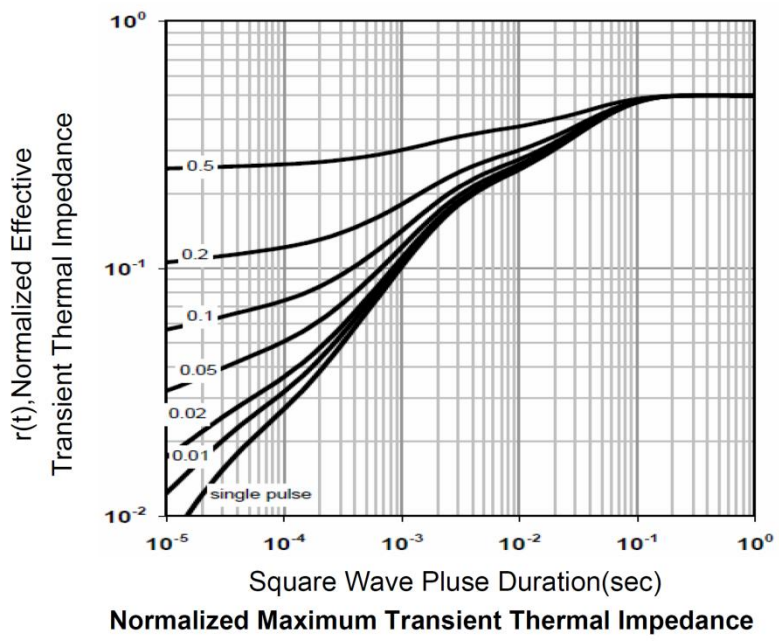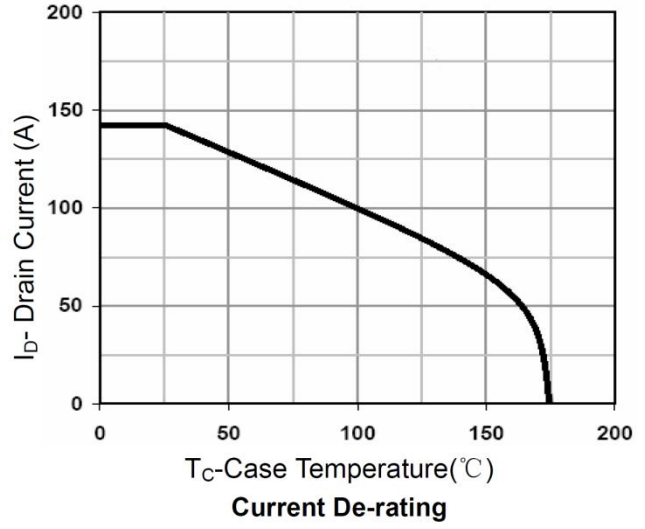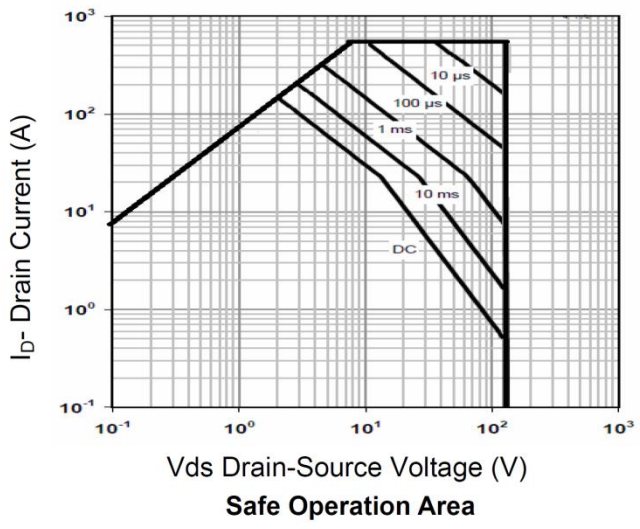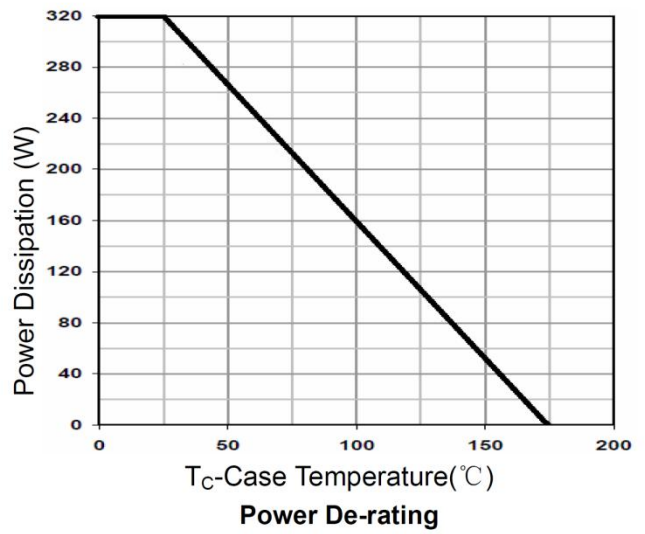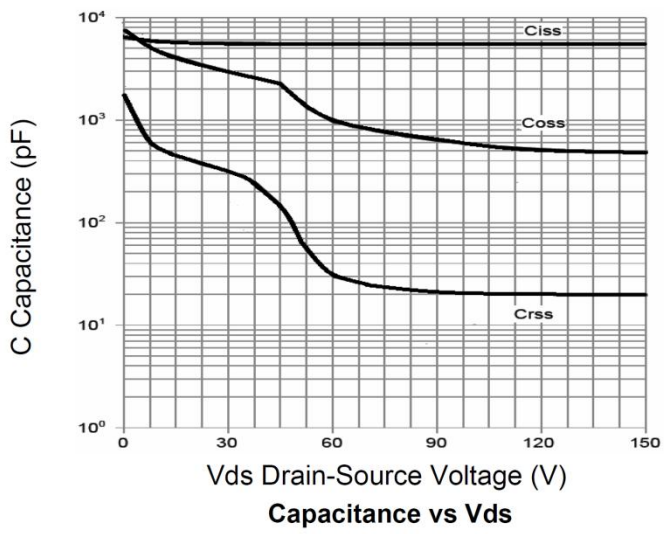

**TO-263 Package Outline Dimensions**

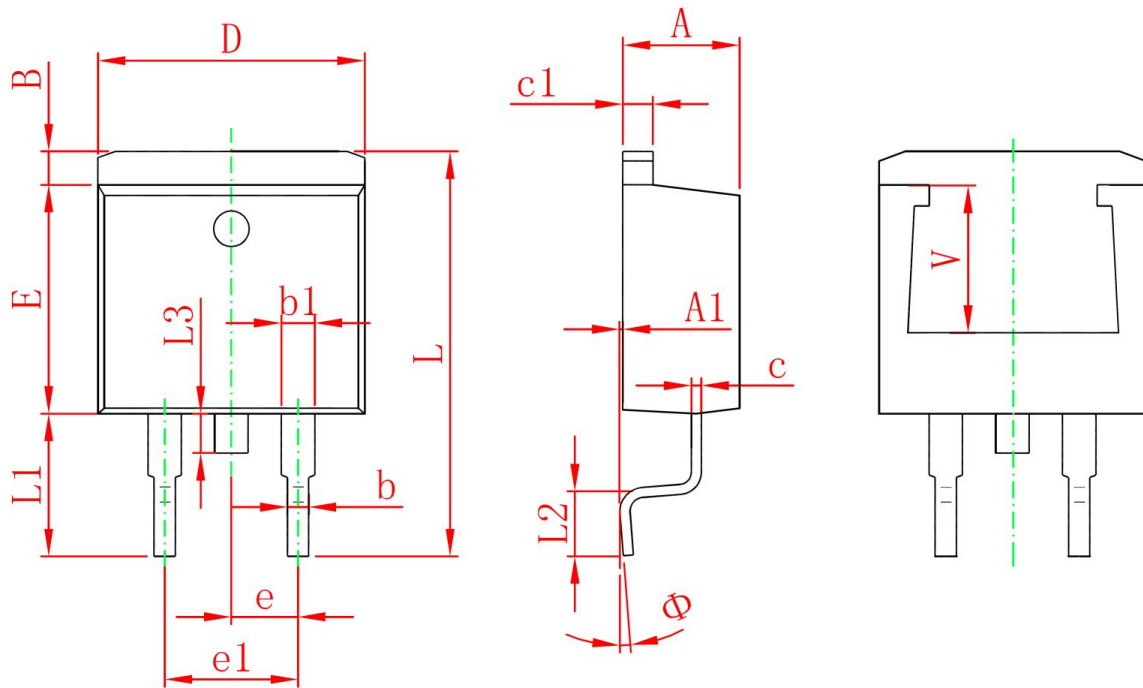

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.470	4.670	0.176	0.184
A1	0.000	0.150	0.000	0.006
B	1.120	1.420	0.044	0.056
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
e	2.540 TYP.		0.100 TYP.	
e1	4.980	5.180	0.196	0.204
L	14.940	15.500	0.588	0.610
L1	4.950	5.450	0.195	0.215
L2	2.340	2.740	0.092	0.108
L3	1.300	1.700	0.051	0.067
$\Phi$	0°	8°	0°	8°
V	5.600 REF.		0.220 REF.	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [Siliup](#) manufacturer:*

Other Similar products are found below :

[IRFD120](#) [IRFY240C](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)  
[IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#)  
[DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#)  
[DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#)  
[DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#) [IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-](#)  
[TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [NVMFS2D3P04M8LT1G](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)  
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#)