

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
60V	5.5mΩ@10V	50A
	8.5mΩ@4.5V	


Feature

- Fast Switching
- Low Gate Charge and R_{ds(on)}
- Low Reverse transfer capacitances
- 100% Single Pulse avalanche energy Test

Applications


- Power switching application
- Hard switched and high frequency circuits
- Uninterruptible power supply

Package

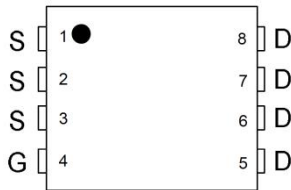


PDFNWB3.3×3.3-8L

Circuit diagram



Marking



60N05G : Product code
* : Month code.







Absolute maximum ratings (Ta=25°C, unless otherwise noted)






Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	60	V
Gate-Source Voltage	V_{GSS}	± 20	V
Continuous Drain Current (Tc=25°C)	I_D	50	A
Pulse Drain Current Tested	I_{DM}	200	A
Maximum Power Dissipation (Tc=25°C)	P_D	31	W
Thermal Resistance-Junction to Case	$R_{\theta JC}$	4.03	°C/W
Maximum Junction Temperature	T_J	-55 to 150	°C
Storage Temperature Range	T_{STG}	-55 to 150	°C

Electrical characteristics (Ta=25°C, unless otherwise noted)


Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Static Electrical Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250mA$	60	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=48V, V_{GS}=0V$	-	-	1	μA
Gate Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$	-	-	± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	1.0	2.0	3.0	V
Drain-Source On-state Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=20A$	-	5.5	6.9	$m\Omega$
		$V_{GS}=4.5V, I_D=10A$	-	8.5	11.5	
Dynamic and Switching Characteristics						
Input Capacitance	C_{iss}	$V_{GS}=0V, V_{DS}=30V, F=1MHz$	-	2083	-	pF
Output Capacitance	C_{oss}		-	793	-	
Reverse Transfer Capacitance	C_{rss}		-	16	-	
Total Gate Charge	Q_g	$V_{DS}=30V, V_{GS}=10V, I_D=20A$	-	37.5	-	nC
Gate-Source Charge	Q_{gs}		-	6.5	-	
Gate-Drain Charge	Q_{gd}		-	10	-	
Turn-on Delay Time	$t_{d(ON)}$	$V_{DD}=30V, I_D=20A, V_{GS}=10V, R_G=4.7\Omega$	-	9	-	nS
Turn-on Rise Time	t_r		-	3.5	-	
Turn-off Delay Time	$t_{d(OFF)}$		-	32	-	
Turn-off Fall Time	t_f		-	5.5	-	
Source-Drain Characteristics						
Diode Forward Voltage	V_{SD}	$I_S=1A, V_{GS}=0V$	-	-	1.2	V

Typical Characteristics

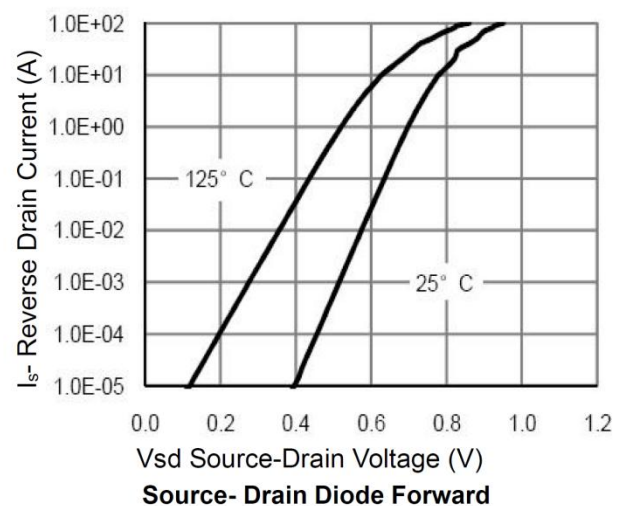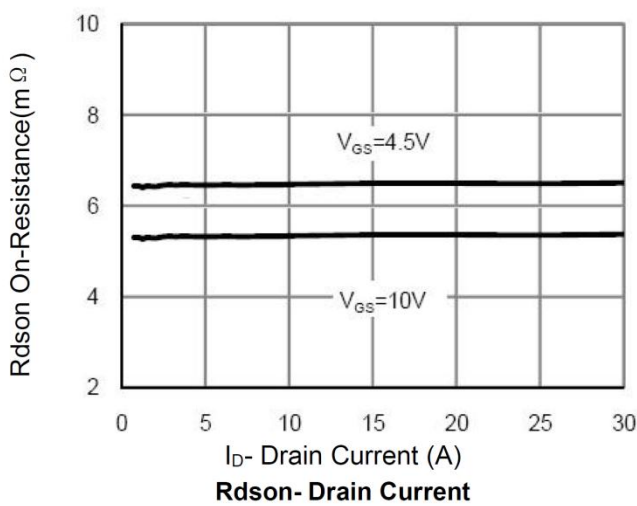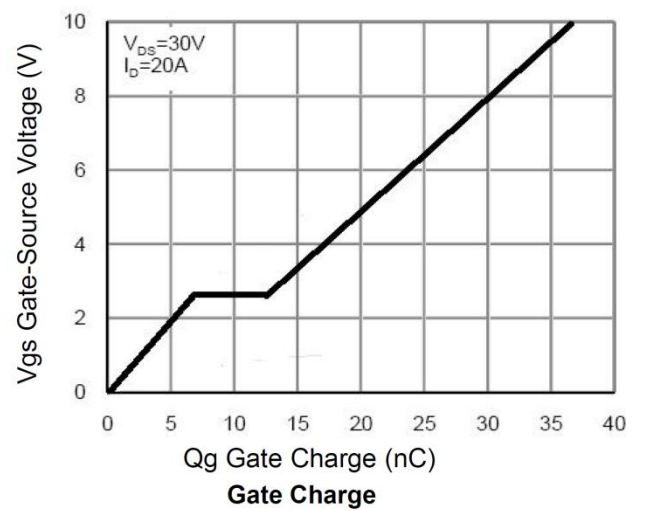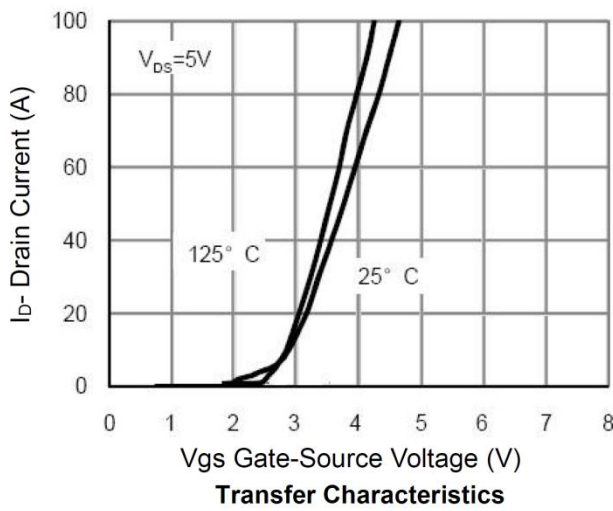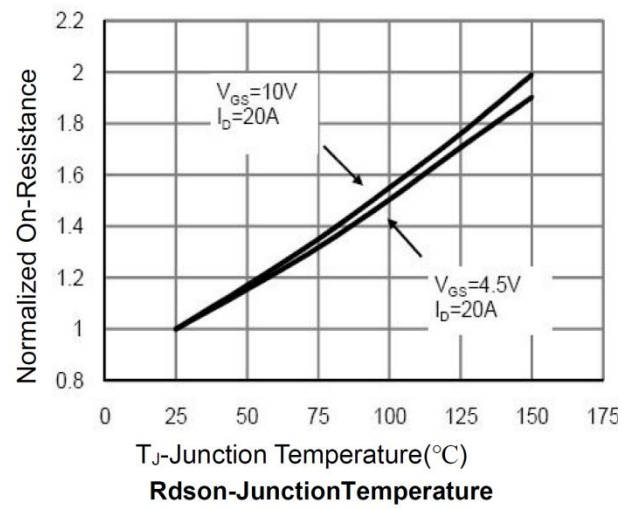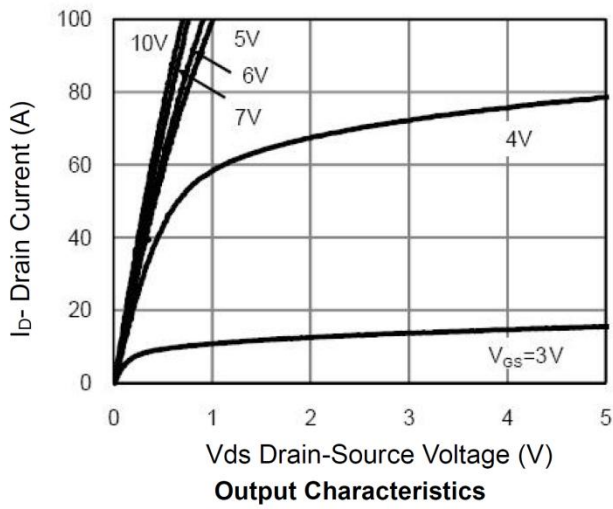

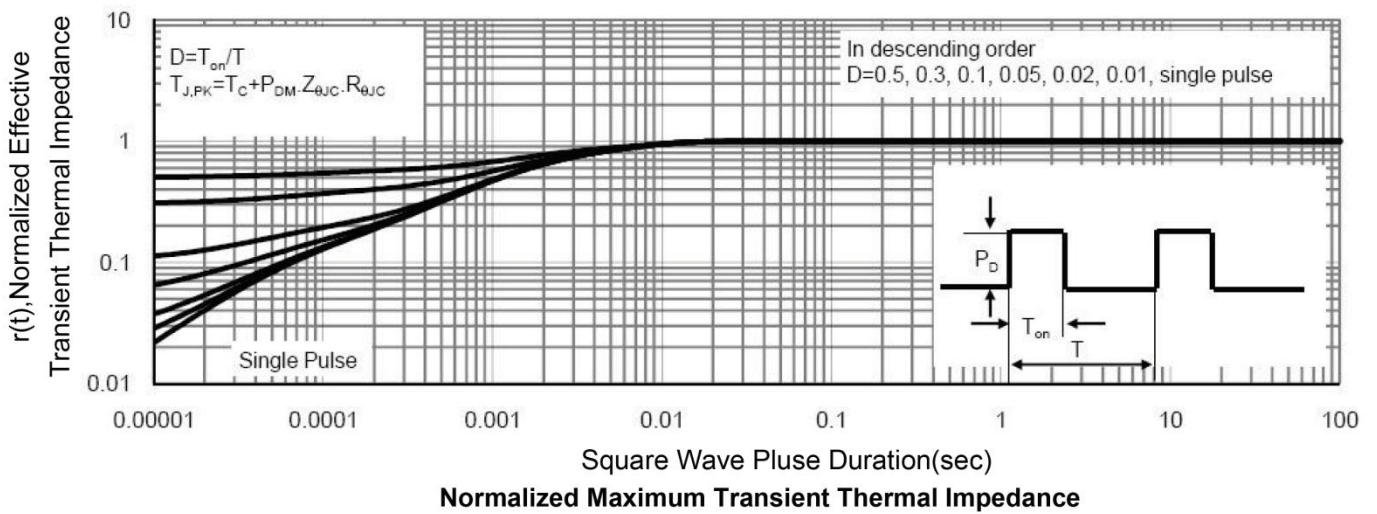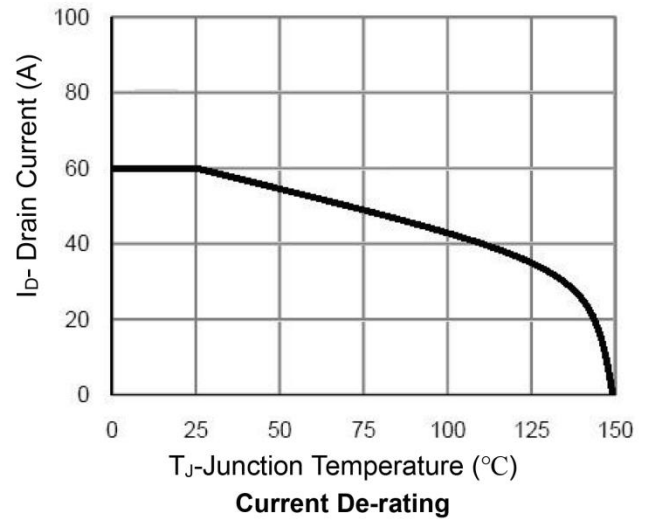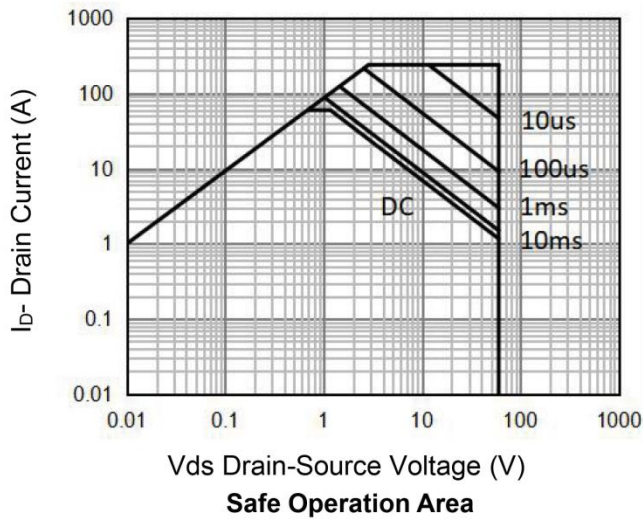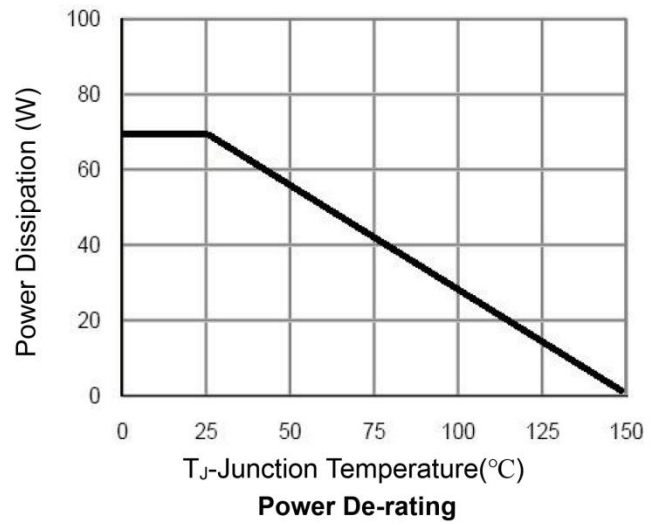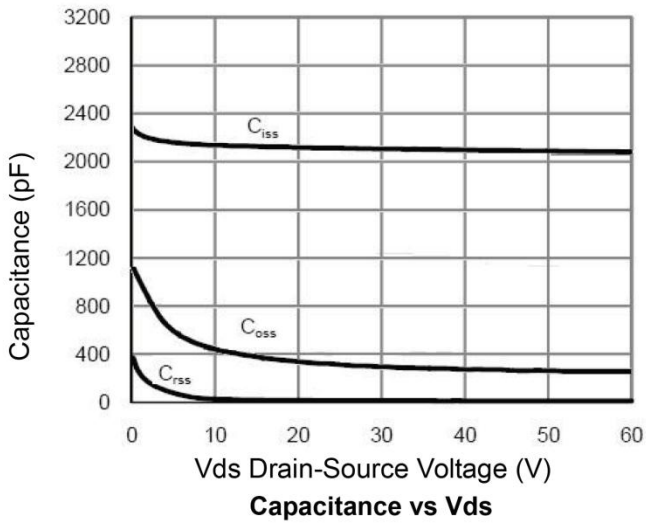

PDFNWB3.3×3.3-8L Package Information

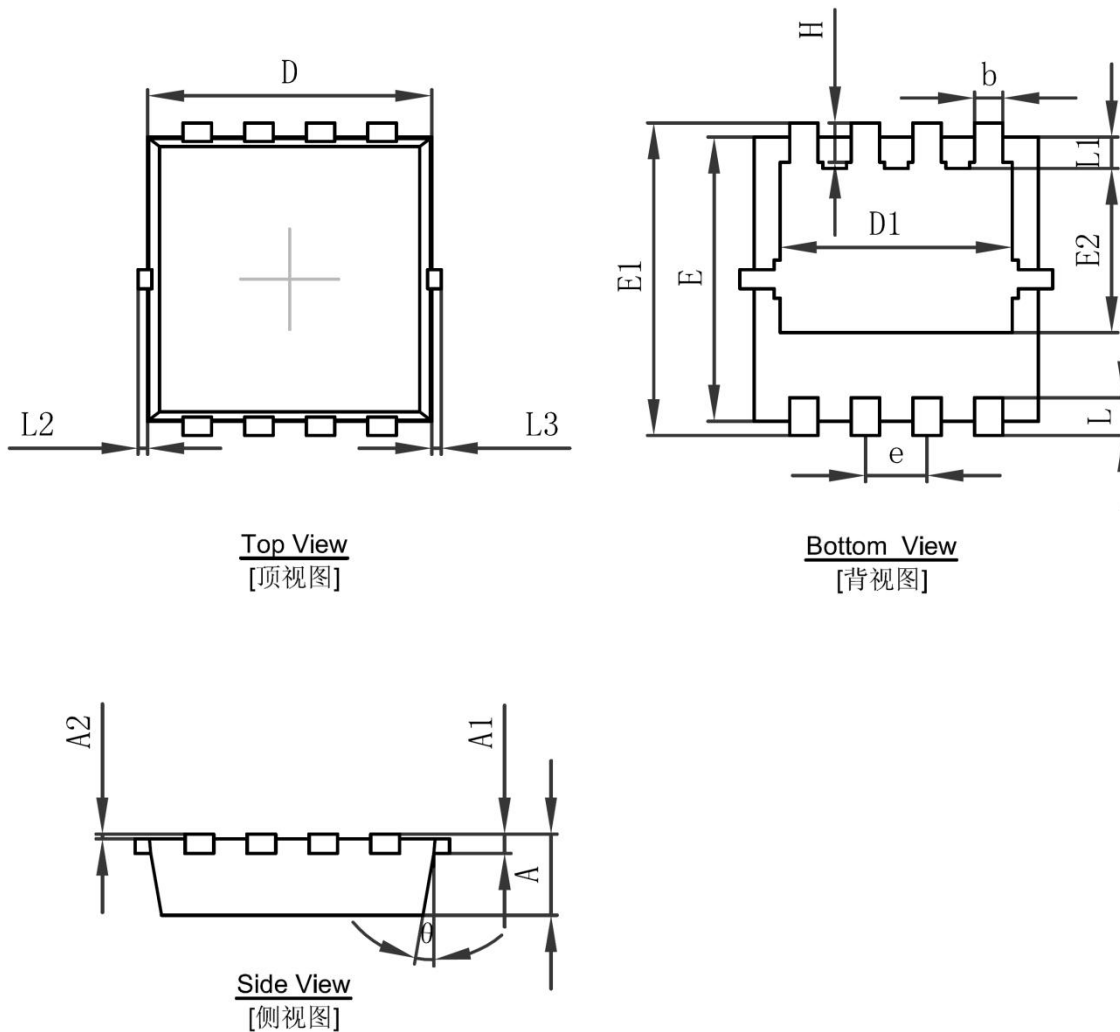

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.650	0.850	0.026	0.033
A1	0.152 REF.		0.006 REF.	
A2	0~0.05		0~0.002	
D	2.900	3.100	0.114	0.122
D1	2.300	2.600	0.091	0.102
E	2.900	3.100	0.114	0.122
E1	3.150	3.450	0.124	0.136
E2	1.535	1.935	0.060	0.076
b	0.200	0.400	0.008	0.016
e	0.550	0.750	0.022	0.030
L	0.300	0.500	0.012	0.020
L1	0.180	0.480	0.007	0.019
L2	0~0.100		0~0.004	
L3	0~0.100		0~0.004	
H	0.315	0.515	0.012	0.020
θ	9°	13°	9°	13°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [Siliup](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [IRFY240C](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#)
[DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#)
[DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#)
[DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#) [IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-](#)
[TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [NVMFS2D3P04M8LT1G](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#)