


V: 2021.01 A7672X

SIMCom LTE Cat 1 Module

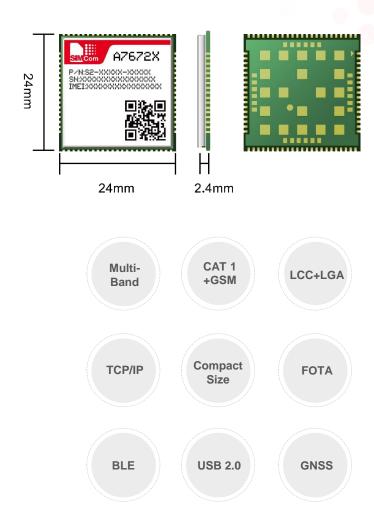

Product Description

A7672X is the LTE Cat 1 module that supports wireless communication modes of LTE/GSM/GPRS/EDGE. It supports maximum 10Mbps downlink rate and 5Mbps uplink rate.

A7672X adopts LCC+LGA form factor and is compatible with SIM7000/SIM7070 series (NB/Cat M modules), and SIM800A/SIM800F series (2G modules), which enables smooth migration from 2G/NB/Cat M products to LTE Cat 1 products, and greatly facilitates more compatible product design for the customer needs.

A7672X supports both multiple built-in network protocols and the drivers for main operation systems (USB driver for Windows, Linux and Android). The software functions, AT commands are compatible with the SIM800 series modules. A7672X also supports BLE* and GNSS* and it integrates abundant industrial standard interfaces with powerful expansibility, such as UART, USB, I2C and GPIO, which makes it perfectly suitable for main IOT applications such as telematics, POS, surveillance devices, industrial routers, and remote diagnostics etc.

Key Benefits

- Compact size with abundant interfaces
- Supports BLE and GNSS functions*
- Abundant software functions: FOTA, LBS, SSL
- Form factor is compatible with the SIM7000/SIM7070 series



Product		A7672S	A7672E	A7672SA
Form Factor		LCC+LGA	LCC+LGA	LCC+LGA
Dimensions(mm)		24.0*24.0*2.4	24.0*24.0*2.4	24.0*24.0*2.4
······· ·	LTE-FDD	B1/B3/B5/B8	B1/B3/B5/B7/B8/B20	B1/B2/B3/B4/B5/B7/B8/B28/B66
Frequency	LTE-TDD	B34/B38/B39/B40/B41	21,26,26,21,26,226	51,52,56,51,56,51,56,526,566
Bands	GSM	900/1800MHz	900/1800MHz	850/900/1800/1900MHz
Temperature		-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Electrical Featu	ires			
Supply Voltage	(V)	3.4~ 4.2	3.4~ 4.2	3.4~ 4.2
Power	LTE	TBD	TBD	TBD
Consumption	GSM,BS_PA_	TBD	TDD	TDD
(mA)	MFRMS=2	IBD	TBD	TBD
Data Transfer				
LTE(Mbps)		10(DL)/5(UL)	10(DL)/5(UL)	10(DL)/5(UL)
GPRS/EDGE(Kbps)		236.8(DL)/236.8(UL)	236.8(DL)/236.8(UL)	236.8(DL)/236.8(UL)
Software Featu	res			
Protocol		TCP/IP/IPV4/IPV6/Multi-PDP/FTP/ FTPS /HTTP/HTTPS/DNS	TCP/IP/IPV4/IPV6/Multi-PDP/FTP/ FTPS /HTTP/HTTPS/DNS	TCP/IP/IPV4/IPV6/Multi-PDP/FTP/ FTPS /HTTP/HTTPS/DNS
TLS		•	•	•
MQTT		•	•	•
File System		•	•	•
Audio Record/Play		0	0	0
TTS		•	•	•
LBS		•	•	•
FOTA		•	•	•
Android RIL		Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0
USB Driver		Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android
WWAN (RNDIS)		•	•	•
ECM		•	•	•
Embedded AT		0	0	0
Firmware Upgrade		USB/FOTA	USB/FOTA	USB/FOTA
Interfaces				
SIM Card		1.8V/3.0V	1.8V/3.0V	1.8V/3.0V
UART		•	•	•
USB		•	•	•
PCM		0	0	0
ADC		•	•	•
GPIO		•	•	•
I2C		•	•	•
GNSS		0	0	0
BLE		0	0	0
Certification				
Certification			CE-RED*/RoHS*/ REACH*	Anatel*/RoHS*/ REACH*

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Simcom manufacturer:

Other Similar products are found below:

SIM33ELA-TE SIM7000E-TE-KIT SIM7600E-TE-KIT SIM8950E-EVB-KIT SIM8950E-TE S2-109H9 S2-109HN S2-108RH S2-108RE S2-108RN S2-108J8 S2-10640-Z1G0D SIM7100E-EVM SIM7906E-M2 MODULE SIM8909-EVB-KIT S2-108R6 SIM7020E-SUB-KIT S2-107DR-Z1Y64 S2-106R4-Z1Q67-Z1Q6Q SIM28M-TE S2-10732-Z1T61 S2-106R4-Z1Q6F-Z1Q6R S2-108HL-Z30BC S2-10AF6 S2-106R4-Z1Q6J-Z1Q6Q S2-108HH SIM5215 CONNECTOR SIM800C32-BT SIM68M S2-108HB-Z2701 S2-1090Y-Z30EL SIM7020G-SUB-KIT SIM548 S2-109KK S2-10A00 S2-10672-Z1L85 SIM808 S2-10768-Z1P20 S2-108J1 S2-109DC-Z30TN S2-10686-Z1L1D S2-105Y0-Z1E0G S2-10A23 S2-106BA-Z1P20 S2-109ZX SIM7600E-H SIM28ML S2-1050J-Z0K4J S2-1097D-Z30 S2-1098T