




SIM7600X-H Mini PCIE

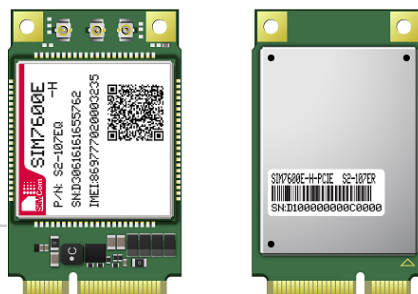

SIM7600X-H-PCIE is a complete multi-band LTE-FDD/LTE-TDD/HSPA+/UMTS/EDGE/GPRS/GSM module solution in Mini PCIE type which supports LTE CAT4 up to 150Mbps for downlink and 50Mbps for uplink data transfer. It is combined with a SIM7600X-H module and a Mini PCIE adapter board.

Smart Machine Smart Decision

Variant for EMEA/Korea/Thailand

SIM7600E-H-PCIE

- LTE-TDD B38/B40/B41
- LTE-FDD B1/B3/B5/B7/B8/B20
- UMTS/HSPA+ B1/B5/B8
- GSM/GPRS/EDGE 900/1800MHz

Variant for North America

SIM7600A-H-PCIE

- LTE-FDD B2/B4/B12
- UMTS/HSPA+ B2/B5

SIM7600V-H-PCIE:

- LTE-FDD B2/B4/B5/B13

Variant for Australia/New Zealand/South America

SIM7600SA-H-PCIE

- LTE-TDD B40
- LTE-FDD B1/B2/B3/B4/B5/B7/B8/B28
- UMTS/HSPA+ B1/B2/B5/B8
- GSM/GPRS/EDGE 850/900/1800/1900MHz

Variant for Japan

SIM7600JC-H-PCIE

- LTE-FDD B1/B3/B8/B18/B19/B26

Variant for Global

SIM7600G-H-PCIE:

- LTE-TDD B34/B38/B39/B40/B41
- LTE-FDD B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26 B28/B66
- UMTS/HSPA+ B1/B2/B4/B5/B6/B8/B19
- GSM/GPRS/EDGE 850/900/1800/1900MHz

General features

- Mini PCIE package
- Control Via AT Commands
- Supply voltage range: 3.0V~ 3.6V, 3.3V Typical
- Operation temperature: -40°C to +85°C
- Dimension: 50.8*31*5.35mm
- Weight: 12.6g
- Bandwidth: 1.4/3/5/10/15/20MHz
- 3GPP E-UTRA Release 10

Specifications for Data transfer

- LTE CAT4
 - Uplink up to 50Mbps
 - Downlink up to 150Mbps
- HSPA+
 - Uplink up to 5.76 Mbps
 - Downlink up to 42 Mbps
- UMTS
 - Uplink/Downlink up to 384Kbps
- EDGE
 - Uplink/Downlink up to 236.8Kbps
- GPRS
 - Uplink/Downlink up to 85.6Kbps

Other features

- USB Driver for Microsoft Windows 2000/XP/Vista/Win7/Win8/Win10
- USB Driver for Linux /Android
- RIL supporting for Android 2.4/4.0/5.0/6.0/7.0
- MBIM to Win8
- Firmware update via USB
- TCP/IP/IPV4/IPV6/Multi-PDP/FTP/FTPS /HTTP/HTTPS/SMTP/SMTPTS/DNS
- SSL3.0/TLS1.0/TLS1.2
- DTMF (Sending and Receiving)
- Audio Playing
- USB Audio and VoLTE
- FOTA
- eCall*

Interfaces

- USB2.0 with High speed up to 480Mbps
- UART
- GPIO
- Antenna: DL MIMO, Support Rx-diversity/GNSS active antenna
- (U)SIM card (1.8V/3.0V)
- Digital Audio through PCM (Optional)
- Analog Audio (Optional)
- Embedded SIM card socket (Optional)
- GNSS: GPS/GLONASS/Beidou/Galileo*

Approvals

- RoHS
- REACH
- CE(RED)/GCF*/Vodafone*(SIM7600E-H Mini PCIE)
- FCC/IC/PTCRB/AT&T(SIM7600A-H Mini PCIE)
- FCC/GCF/Verizon(SIM7600V-H Mini PCIE)
- FCC/CE(RED)/ACMA/ANATEL(SIM7600SA-H Mini PCIE)
- JATE/TELEC/Docomo*/KDDI*/Softbank*(SIM7600JC-H Mini PCIE)
- RoHS*/REACH*/FCC*/CE(RED)*(SIM7600G-H Mini PCIE)

*Under Development/Testing

More about SIMCom SIM7600X-H MINI PCIE
Please contact:

Tel: +86 21 31575100\31575200

Email: simcom@simcom.com

Website: www.simcom.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [WiFi Modules - 802.11](#) category:

Click to view products by [Simcom](#) manufacturer:

Other Similar products are found below :

[7265.NGWG.SW](#) [HDG204-DN-3](#) [FXX-3061-MIX](#) [AX210.NGWG.NV](#) [EWM-W190H02E](#) [ESP32-S3R8](#) [ESP32-WROOM-32U-16MB](#)
[ESP32-WROOM-32UE](#) [SIM800C](#) [EC04-SGC](#) [Ai-WB2-01F](#) [Ai-M62-32S](#) [Ai-M62-CBS](#) [DFR0654-F](#) [ESP32-WROVER-IB-N16R8](#) [Ai-M62-](#)
[M2-I-Kit](#) [Ai-WB2-12S](#) [Ai-WB2-13](#) [Ai-WB2-01M](#) [Ai-M62-13U](#) [NodeMCU-VB-01-Kit](#) [Ai-WB2-M1](#) [Ai-M62-12F](#) [Ai-M62-32S-Kit](#) [Ai-](#)
[M62-13](#) [Ai-M61-32S-KIT\(ALL\)](#) [Ai-M61-32S\(ALL\)](#) [Ai-M61-32S](#) [Ai-WB2-12F](#) [Ai-M62-M2-I](#) [Ai-WB2-32S](#) [Ai-M62-13-Kit](#) [Ai-M62-32S-I](#)
[Ai-M61-32S-I](#) [E103-W12X](#) [E103-W04B](#) [E103-W05A](#) [E103-W20\(7628\)](#) [E103-W04](#) [E103-W05C](#) [E103-W08A](#) [E103-W03](#) [ML307S](#)
[MN316-DBRD](#) [ML305](#) [M5310-E](#) [ML307A-DCLN](#) [ESP32-SOLO-1-N49](#) [ESP32-SOLO-1-N16](#) [ESP32-S2-WROVER-I-N16R2](#)