


**SOT-89-3L**

**SOT-89-3L 贴片塑封三极管**

**SOT-89-3L Plastic-Encapsulate Transistors**



- 1. BASE
- 2. COLLECTOR
- 3. EMITTER

MARKING: BCX51:AA, BCX51-10:AC, BCX51-16:AD  
 BCX52:AE, BCX52-10:AG, BCX52-16:AM  
 BCX53:A H, BCX53-10:AK, BCX53-16:AL

**特征 Features**

- Complementary to BCX54,BCX55,BCX56;
- Medium Power General Purposes;
- Driver Stages of Audio Amplifiers.

**机械数据 Mechanical Data**

- SOT-89-3L Small Outline Plastic Package
- Epoxy UL: 94V-0
- Mounting Position: Any

极限值和温度特性(TA = 25°C 除非另有规定)

**Maximum Ratings & Thermal Characteristics** (Ratings at 25°C ambient temperature unless otherwise specified.)

参数 Parameters	符号 Symbol	TYPE	数值 Value	单位 Unit
Collector-Base Voltage	V <sub>CBO</sub>	BCX51 BCX52 BCX53	-45 -60 -100	V
Collector-Emitter Voltage	V <sub>CEO</sub>	BCX51 BCX52 BCX53	-45 -60 -80	V
Emitter -Base Voltage	V <sub>EBO</sub>		-5	V
Collector Current-Continuous	I <sub>c</sub>		-1.0	A
Collector Power Dissipation	P <sub>c</sub>		500	mW
Junction Temperature	T <sub>j</sub>		150	°C
Storage Temperature	T <sub>stg</sub>		-55-+150	°C
Thermal resistance From junction to ambient	R <sub>θJA</sub>		250	°C/W

电特性 (TA = 25°C 除非另有规定)







**Electrical Characteristics** (Ratings at 25°C ambient temperature unless otherwise specified.)



参数 Parameter	符号 Symbols	测试条件 Test Condition	界限 Limits			单位 Unit
			Min	Typ	Max	
Collector-base breakdown voltage	V(BR)CBO	I <sub>C</sub> =-100uA, I <sub>E</sub> =0	BCX51 BCX52 BCX53	-45 -60 -100		V
Collector-emitter breakdown voltage	V(BR)CEO	I <sub>C</sub> =-10mA, I <sub>B</sub> =0	BCX51 BCX52 BCX53	-45 -60 -80		V
Emitter-base breakdown voltage	V(BR)EBO	I <sub>E</sub> =-100uA, I <sub>C</sub> =0		-5		V
Collector cut-off current	I <sub>CBO</sub>	V <sub>CB</sub> =-30V, I <sub>E</sub> =0			-100	nA
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> =-5V, I <sub>C</sub> =0			-100	nA
DC current gain	hFE(1)	V <sub>CE</sub> =-2V, I <sub>C</sub> =-5mA		63		
	hFE(2)	V <sub>CE</sub> =-2V, I <sub>C</sub> =-150mA		63	250	
	hFE(3)	V <sub>CE</sub> =-2V, I <sub>C</sub> =-500mA		25		
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> =-500mA, I <sub>B</sub> =-50mA			-0.5	V
Base -emitter voltage	V <sub>BE</sub>	V <sub>CE</sub> =-2V, I <sub>C</sub> =-500mA			-1.0	V
Transition frequency	f <sub>t</sub>	V <sub>CE</sub> =-5V, I <sub>C</sub> =-10mA, f=100MHz		50		MHz

**CLASSIFICATION OF hFE(2)**


RANK	BCX51 BCX52 BCX53	BCX51-10 BCX52-10 BCX53-10	BCX51-16 BCX52-16 BCX53-16
RANGE	63-250	63-160	100-250

Typical characteristics

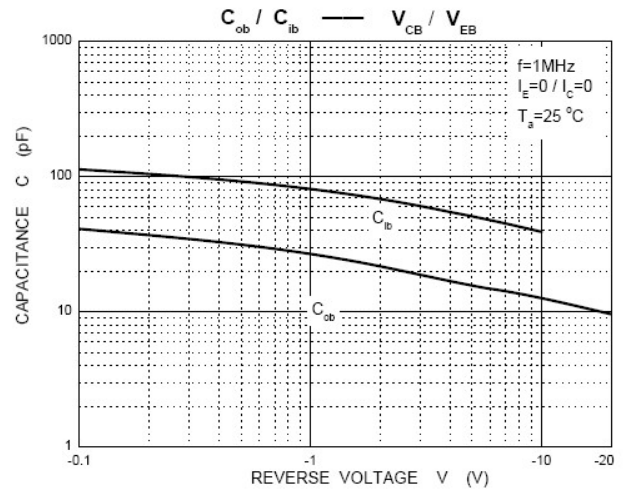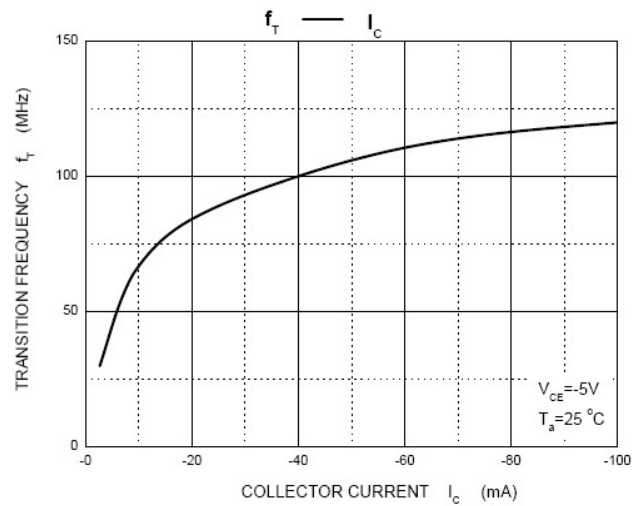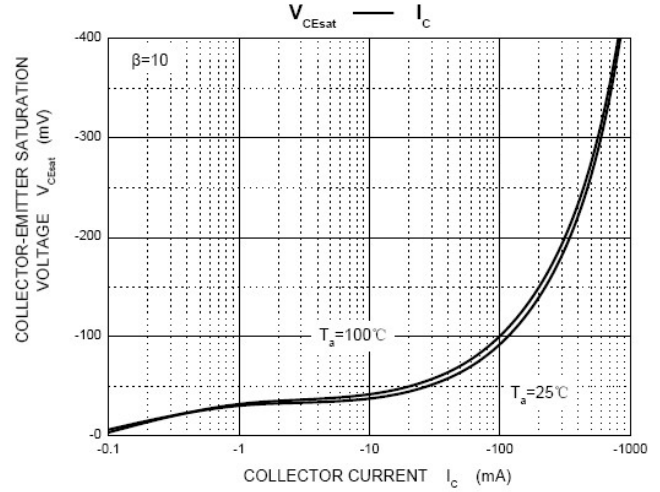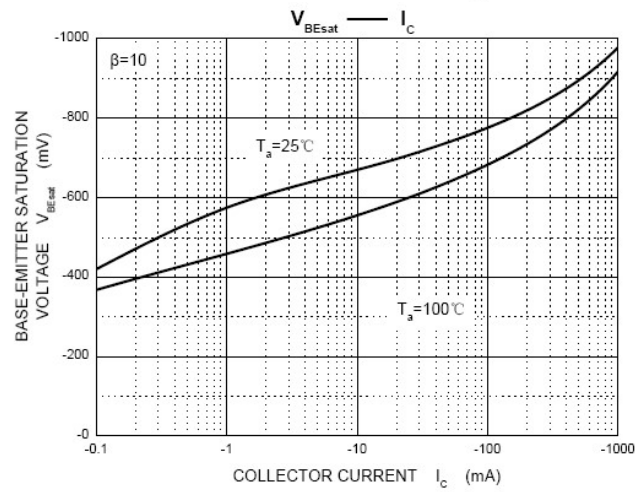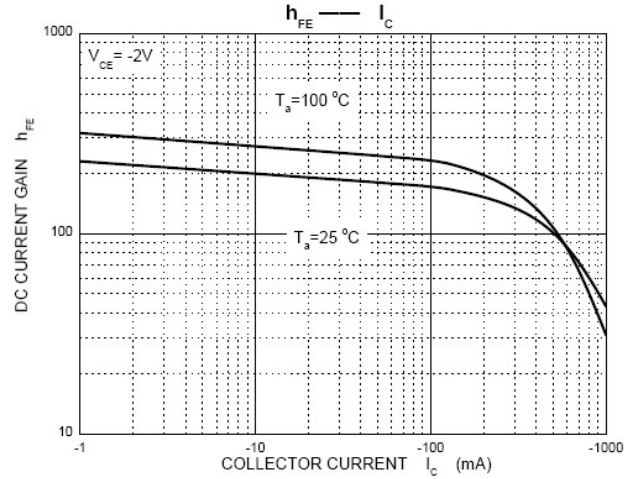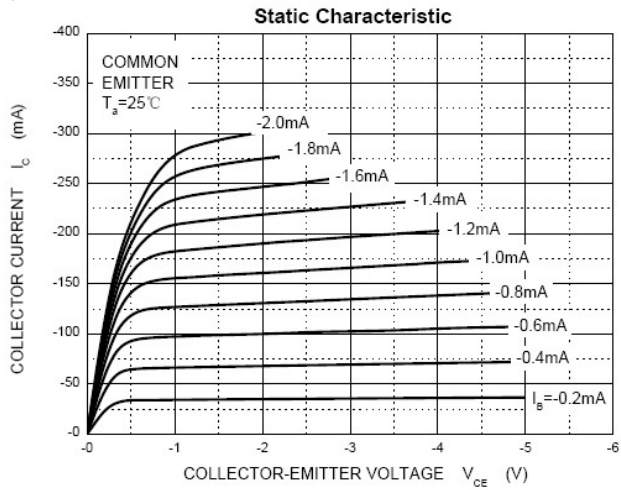

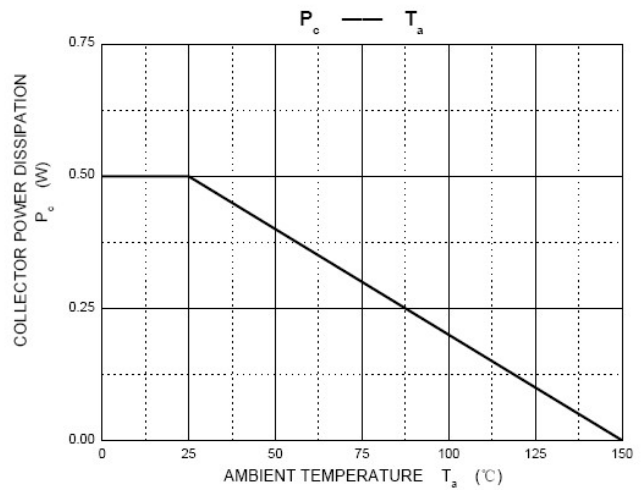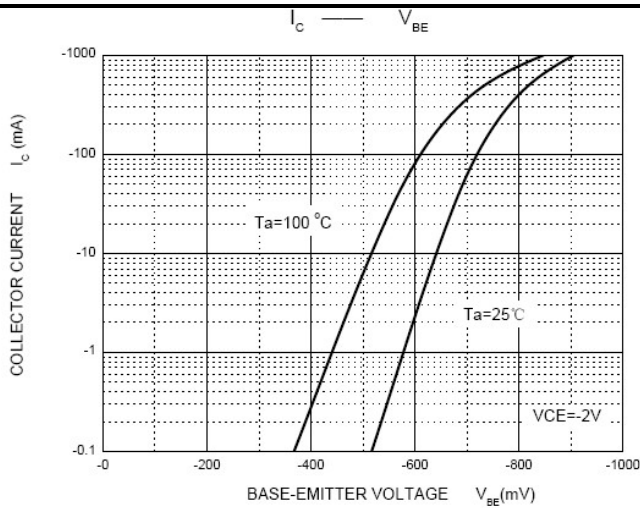


## SOT-89-3L PACKAGE OUTLINE Plastic surface mounted package

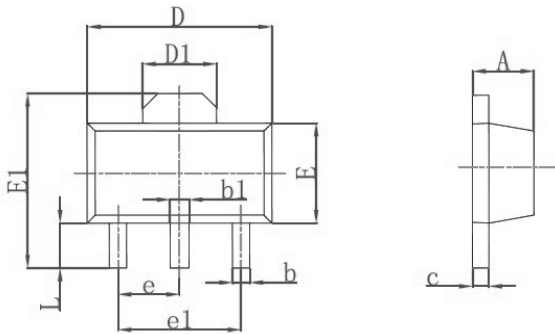

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047

焊盘设计参考 Precautions: PCB Design

Recommended land dimensions for SOT-89-3L diode. Electrode patterns for PCBs

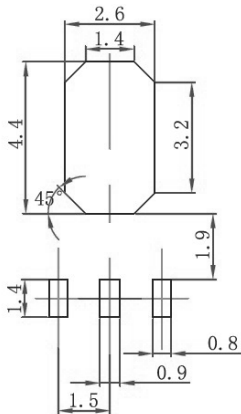

Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [SINEDEVICE manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [BC856BW-13-F](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#)