


SOT-89-3L



1. BASE

2. COLLECTOR

3. EMITTER

MARKING: BCX54:BA, BCX54-10:BC, BCX54-16:BD
 BCX55:BE, BCX55-10:BG, BCX55-16BM
 BCX56:B H, BCX56-10:BK, BCX56-16:BL

SOT-89-3L 贴片塑封三极管 SOT-89-3L Plastic-Encapsulate Transistors

特征 Features

- 与 BCX51,BCX52,BCX53 配对; Complementary to BCX51, BCX52,BCX53
- 最大功率耗散 500mW; Power Dissipation of 500mW
- 高稳定性和可靠性。High Stability and High Reliability

机械数据 Mechanical Data

- 封装: SOT-89-3L 封装 SOT-89-3L Small Outline Plastic Package
- 环氧树脂 UL 易燃等级 Epoxy UL: 94V-0
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性(TA = 25°C 除非另有规定)

Maximum Ratings & Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)

参数 Parameters	符号 Symbol	TYPE	数值 Value	单位 Unit
Collector-Base Voltage	V _{CBO}	BCX54 BCX55 BCX56	45 60 100	V
Collector-Emitter Voltage	V _{CEO}	BCX54 BCX55 BCX56	45 60 80	V
Emitter -Base Voltage	V _{EBO}		5	V
Collector Current-Continuous	I _C		1.0	A
Base Curren	I _B		0.1	A
Collector Power Dissipation	P _C		500	mW
Junction Temperature	T _j		150	°C
Storage Temperature	T _{stg}		-55-+150	°C
Thermal resistance From junction to ambient	R _{θJA}		250	°C/W

电特性 (TA = 25°C 除非另有规定)







Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)



参数 Parameter	符号 Symbols	测试条件 Test Condition	界限 Limits			单位 Unit
			Min	Typ	Max	
Collector-base breakdown voltage	V _{(BR)CBO}	I _C =100uA, I _E =0	BCX54 BCX55 BCX56	45 60 100		V
Collector-emitter breakdown voltage	V _{(BR)CEO}	I _C =10mA, I _B =0	BCX54 BCX55 BCX56	45 60 80		V
Emitter-base breakdown voltage	V _{(BR)EBO}	I _E =10uA, I _C =0		5		V
Collector cut-off current	I _{CBO}	V _{CB} =30V, I _E =0			100	nA
Emitter cut-off current	I _{EBO}	V _{EB} =5V, I _C =0			100	nA
DC current gain	h _{FE} (1)	V _{CE} =2V, I _C =5mA		40		
	h _{FE} (2)	V _{CE} =2V, I _C =150mA		63	250	
	h _{FE} (3)	V _{CE} =2V, I _C =500mA		25		
Collector-emitter saturation voltage	V _{CE(sat)}	I _C =500mA, I _B =50mA			0.50	V
Base -emitter voltage	V _{BE}	V _{CE} =2V, I _C =500mA			1.00	V
Transition frequency	f _T	V _{CE} =5V, I _C =10mA, f=100MHz		130		MHz

CLASSIFICATION OF h_{FE}(2)


RANK	BCX54 BCX55 BCX56	BCX54-10 BCX55-10 BCX56-10	BCX54-16 BCX55-16 BCX56-16
RANGE	63-250	63-160	100-250

Typical characteristics

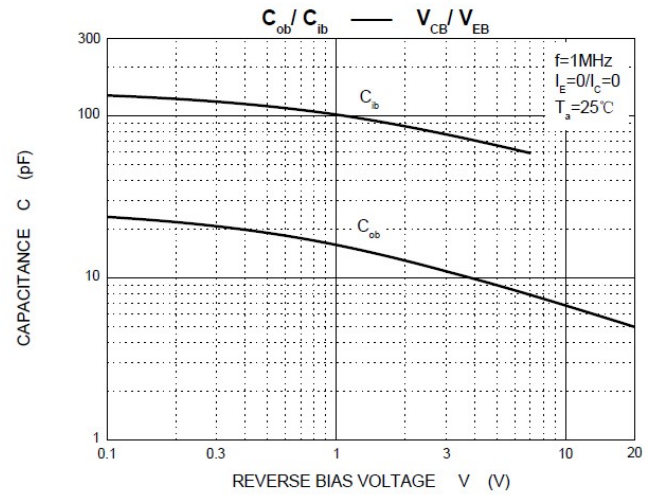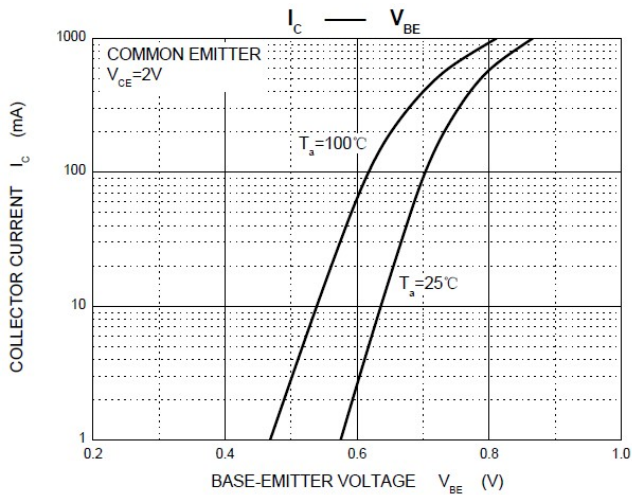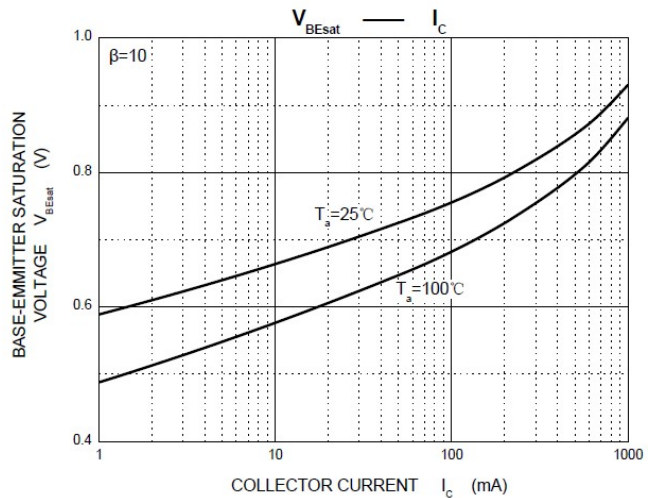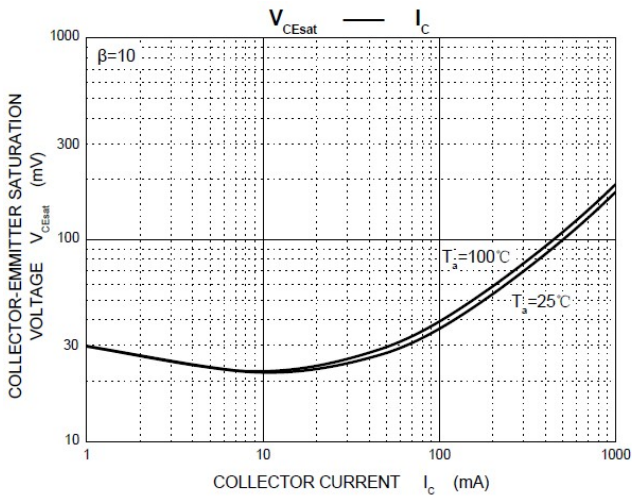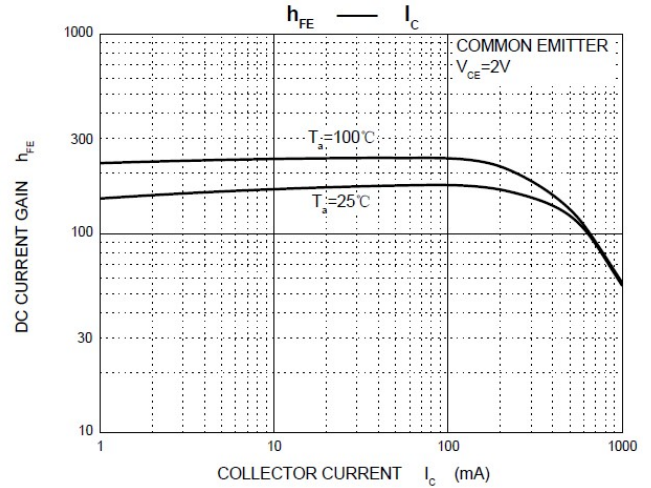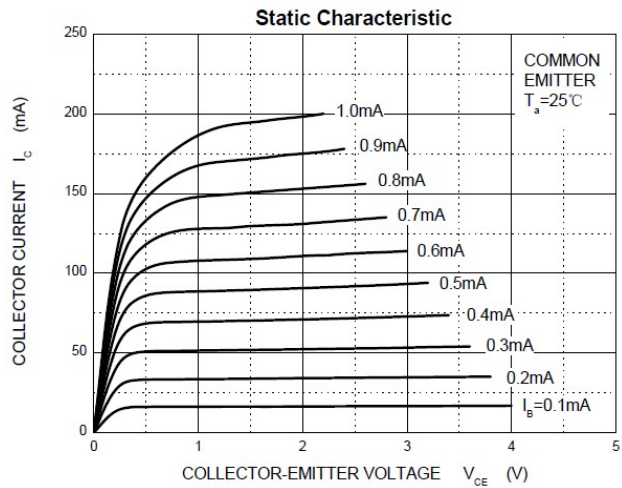

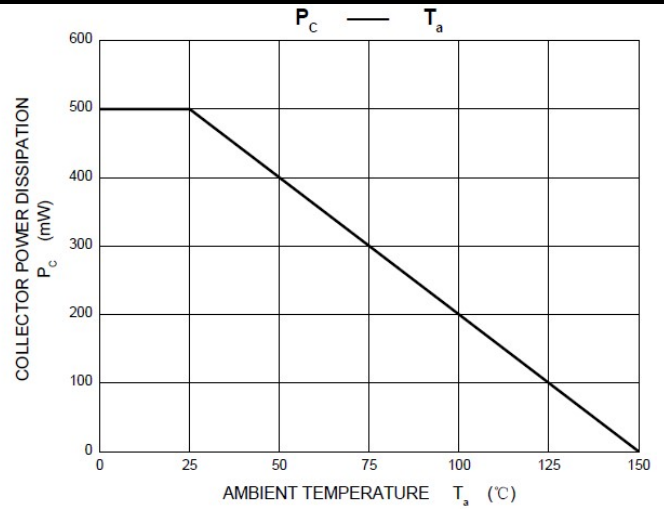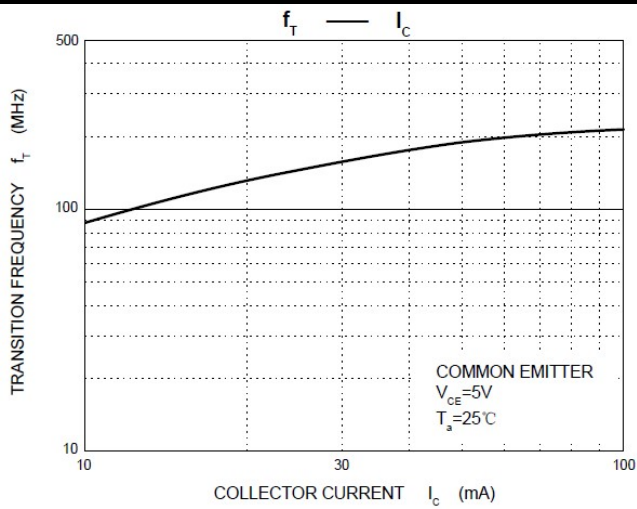


SOT-89-3L PACKAGE OUTLINE Plastic surface mounted package

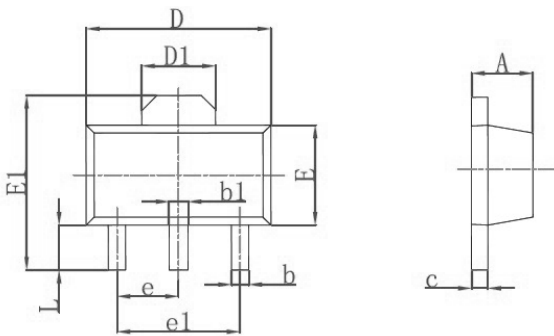

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047

焊盘设计参考 Precautions: PCB Design

Recommended land dimensions for SOT-89-3L diode. Electrode patterns for PCBs

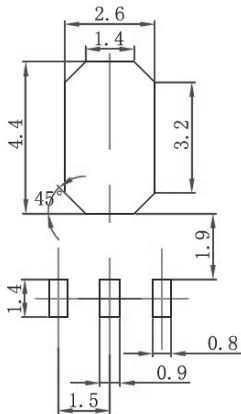

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05mm$.
3. The pad layout is for reference purposes only.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [SINEDEVICE manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [BC856BW-13-F](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#)