

SMDJ Series

**Surface Mounted Transient Voltage Suppressors**

Revision: A

**General Description**

This SMD diode is for use in protection application circuitry

- Excellent Clamping Capability
- Very Fast Response Time
- Low Reverse Leakage

**Features**

- Case: SMC(DO-214AB), molded epoxy body
- Terminal: Matte tin plated leads
- Mount Position: Any
- Excellent Clamping Capability
- 3000W Peak Pulse Power Capability at 10x1000μs

**Maximum Ratings** (T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Symbol	Value	Units
Peak Power Dissipation with a 10/1000μs waveform	P <sub>PP</sub>	3000	W
Peak Pulse Current with a 10/1000μs waveform	I <sub>PP</sub>	See Next Table	A
Power Dissipation on infinite heatsink at TL = 75°C	P <sub>D</sub>	8.0	W
Peak Forward Surge Current, 8.3ms Single Half Sine-Wave Unidirectional Only	I <sub>FSM</sub>	300	A
Maximum Instantaneous Forward Voltage at 30A for Unidirectional Only	V <sub>F</sub>	5.0	V
Operating Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to 150	°C

## SMDJ Series

### Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

Part Number		Marking		V <sub>R</sub>	I <sub>R@V<sub>R</sub></sub>	V <sub>BR@I<sub>T</sub></sub>		I <sub>T</sub>	V <sub>C@I<sub>PP</sub></sub>	I <sub>PP</sub> <sup>①</sup>
Uni-Polar	Bi-Polar	Uni	Bi	V	μA	min(V)	max(V)	mA	max(V)	A
SMDJ5.0A	SMDJ5.0CA	SMDJ5.0A	SMDJ5.0CA	5	800	6.4	7	10	9.2	326.1
SMDJ6.0A	SMDJ6.0CA	SMDJ6.0A	SMDJ6.0CA	6	800	6.67	7.37	10	10.3	291
SMDJ 6.5A	SMDJ6.5CA	SMDJ 6.5A	SMDJ6.5CA	6.5	500	7.22	7.98	10	11.2	267.9
SMDJ7.0 A	SMDJ7.0CA	SMDJ7.0 A	SMDJ7.0CA	7	200	7.78	8.6	10	12	250
SMDJ 7.5A	SMDJ7.5CA	SMDJ 7.5A	SMDJ7.5CA	7.5	100	8.33	9.21	1	12.9	232.6
SMDJ 8.0A	SMDJ8.0CA	SMDJ 8.0A	SMDJ8.0CA	8	50	8.89	9.83	1	13.6	220.6
SMDJ8.5 A	SMDJ8.5CA	SMDJ8.5 A	SMDJ8.5CA	8.5	20	9.44	10.4	1	14.4	208.3
SMDJ9.0 A	SMDJ9.0CA	SMDJ9.0 A	SMDJ9.0CA	9	5	10	11.1	1	15.4	194.8
SMDJ10A	SMDJ10CA	SMDJ10A	SMDJ10CA	10	1	11.1	12.3	1	17	176.5
SMDJ11A	SMDJ11CA	SMDJ11A	SMDJ11CA	11	1	12.2	13.5	1	18.2	164.8
SMDJ12A	SMDJ12CA	SMDJ12A	SMDJ12CA	12	1	13.3	14.7	1	19.9	150.8
SMDJ13A	SMDJ13CA	SMDJ13A	SMDJ13CA	13	1	14.4	15.9	1	21.5	139.5
SMDJ14A	SMDJ14CA	SMDJ14A	SMDJ14CA	14	1	15.6	17.2	1	23.2	129.3
SMDJ15A	SMDJ15CA	SMDJ15A	SMDJ15CA	15	1	16.7	18.5	1	24.4	123
SMDJ16A	SMDJ16CA	SMDJ16A	SMDJ16CA	16	1	17.8	19.7	1	26	115.4
SMDJ17A	SMDJ17CA	SMDJ17A	SMDJ17CA	17	1	18.9	20.9	1	27.6	108.7
SMDJ18A	SMDJ18CA	SMDJ18A	SMDJ18CA	18	1	20	22.1	1	29.2	102.7
SMDJ20A	SMDJ20CA	SMDJ20A	SMDJ20CA	20	1	22.2	24.5	1	32.4	92.6
SMDJ22A	SMDJ22CA	SMDJ22A	SMDJ22CA	22	1	24.4	26.9	1	35.5	84.5
SMDJ24A	SMDJ24CA	SMDJ24A	SMDJ24CA	24	1	26.7	29.5	1	38.9	77.1
SMDJ26A	SMDJ26CA	SMDJ26A	SMDJ26CA	26	1	28.9	31.9	1	42.1	71.3
SMDJ28A	SMDJ28CA	SMDJ28A	SMDJ28CA	28	1	31.1	34.4	1	45.4	66.1
SMDJ30A	SMDJ30CA	SMDJ30A	SMDJ30CA	30	1	33.3	36.8	1	48.4	62
SMDJ33A	SMDJ33CA	SMDJ33A	SMDJ33CA	33	1	36.7	40.6	1	53.3	56.3
SMDJ36A	SMDJ36CA	SMDJ36A	SMDJ36CA	36	1	40	44.2	1	58.1	51.6
SMDJ40A	SMDJ40CA	SMDJ40A	SMDJ40CA	40	1	44.4	49.1	1	64.5	46.5
SMDJ43A	SMDJ43CA	SMDJ43A	SMDJ43CA	43	1	47.8	52.8	1	69.4	43.2
SMDJ45A	SMDJ45CA	SMDJ45A	SMDJ45CA	45	1	50	55.3	1	72.7	41.3
SMDJ48A	SMDJ48CA	SMDJ48A	SMDJ48CA	48	1	53.3	58.9	1	77.4	38.8
SMDJ51A	SMDJ51CA	SMDJ51A	SMDJ51CA	51	1	56.7	62.7	1	82.4	36.4


## SMDJ Series

### Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise noted)


Part Number		Marking		V <sub>R</sub>	I <sub>R</sub> @V <sub>R</sub>	V <sub>BR</sub> @I <sub>T</sub>		I <sub>T</sub>	V <sub>C</sub> @I <sub>PP</sub>	I <sub>PP</sub> <sup>①</sup>
Uni-Polar	Bi-Polar	Uni	Bi	V	μA	min(V)	max(V)	mA	max(V)	A
SMDJ54A	SMDJ54CA	SMDJ54A	SMDJ54CA	54.0	1	60.0	66.3	1	87.1	34.4
SMDJ58A	SMDJ58CA	SMDJ58A	SMDJ58CA	58.0	1	64.4	71.2	1	93.6	32.1
SMDJ60A	SMDJ60CA	SMDJ60A	SMDJ60CA	60.0	1	66.7	73.7	1	96.8	31
SMDJ64A	SMDJ64CA	SMDJ64A	SMDJ64CA	64.0	1	71.1	78.6	1	103	29.1
SMDJ70A	SMDJ70CA	SMDJ70A	SMDJ70CA	70.0	1	77.8	86.0	1	113	26.5
SMDJ75A	SMDJ75CA	SMDJ75A	SMDJ75CA	75.0	1	83.3	92.1	1	121	24.8
SMDJ78A	SMDJ78CA	SMDJ78A	SMDJ78CA	78.0	1	86.70	95.8	1	126	23.8
SMDJ85A	SMDJ85CA	SMDJ85A	SMDJ85CA	85.0	1	94.4	104.0	1	137	21.9
SMDJ90A	SMDJ90CA	SMDJ90A	SMDJ90CA	90.0	1	100.0	111.0	1	146	20.5
SMDJ100A	SMDJ100CA	SMDJ100A	SMDJ100CA	100.0	1	111.0	123.0	1	162	18.5
SMDJ110A	SMDJ110CA	SMDJ110A	SMDJ110CA	110.0	1	122.0	135.0	1	177	16.9
SMDJ120A	SMDJ120CA	SMDJ120A	SMDJ120CA	120.0	1	133.0	147.0	1	193	15.5
SMDJ130A	SMDJ130CA	SMDJ130A	SMDJ130CA	130.0	1	144.0	159.0	1	209	14.4
SMDJ150A	SMDJ150CA	SMDJ150A	SMDJ150CA	150.0	1	167.0	185.0	1	243	12.3
SMDJ160A	SMDJ160CA	SMDJ160A	SMDJ160CA	160.0	1	178.0	197.0	1	259	11.6
SMDJ170A	SMDJ170CA	SMDJ170A	SMDJ170CA	170.0	1	189.0	209.0	1	275	10.9
SMDJ180A	SMDJ180CA	SMDJ180A	SMDJ180CA	180.0	1	201.0	222.0	1	292	10.3
SMDJ190A	SMDJ190CA	SMDJ190A	SMDJ190CA	190.0	1	211.0	233.0	1	308	9.7
SMDJ200A	SMDJ200CA	SMDJ200A	SMDJ200CA	200.0	1	224.0	247.0	1	324	9.3
SMDJ210A	SMDJ210CA	SMDJ210A	SMDJ210CA	210.0	1	237.0	263.0	1	340	8.8
SMDJ220A	SMDJ220CA	SMDJ220A	SMDJ220CA	220.0	1	246.0	272.0	1	356	8.4
SMDJ250A	SMDJ250CA	SMDJ250A	SMDJ250CA	250.0	1	279.0	309.0	1	405	7.8
SMDJ300A	SMDJ300CA	SMDJ300A	SMDJ300CA	300.0	1	335.0	371.0	1	486	6.5
SMDJ350A	SMDJ350CA	SMDJ350A	SMDJ350CA	350.0	1	391.0	432.0	1	567	5.5
SMDJ400A	SMDJ400CA	SMDJ400A	SMDJ400CA	400.0	1	447.0	494.0	1	648	4.8
SMDJ440A	SMDJ440CA	SMDJ440A	SMDJ440CA	440.0	1	492.0	543.0	1	713	4.4

Ratings and Characteristics Curves ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)


**FIG.1:V- I curve characteristics (Uni-directional)**

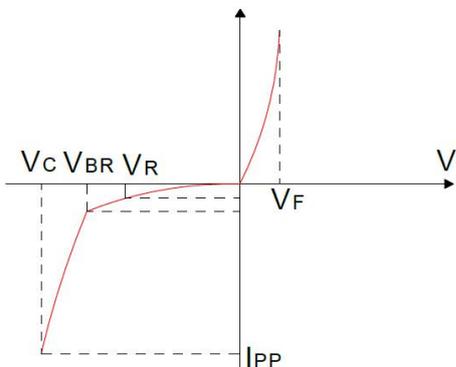


**FIG.2:V- I curve characteristics (Bi-directional)**

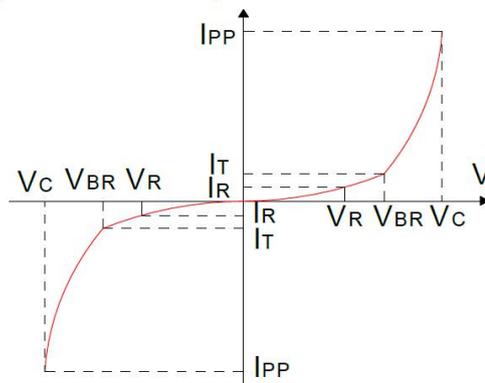

**FIG.3: Pulse waveform**

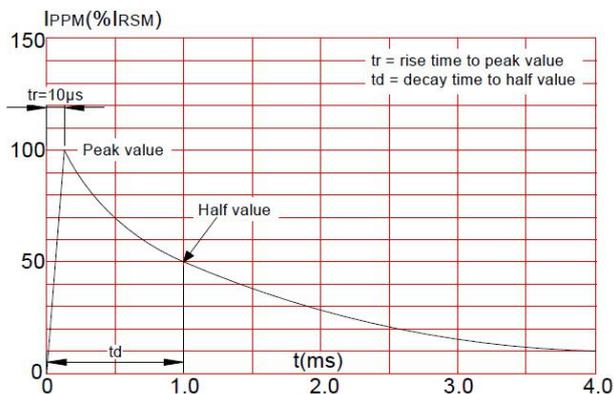


**FIG.4: Pulse derating curve**

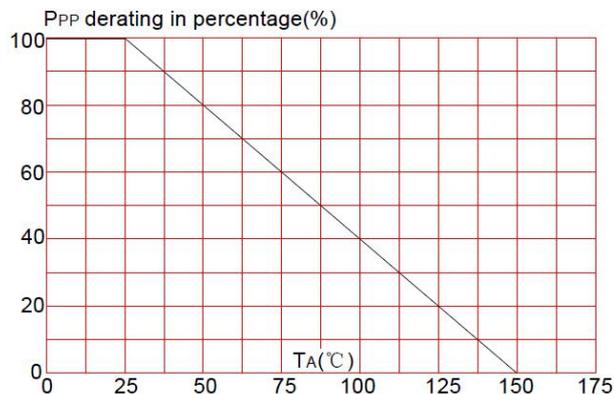

## SMDJ Series

### Package Outline Dimensions in inches (millimeters)

#### SMC(DO-214AB)

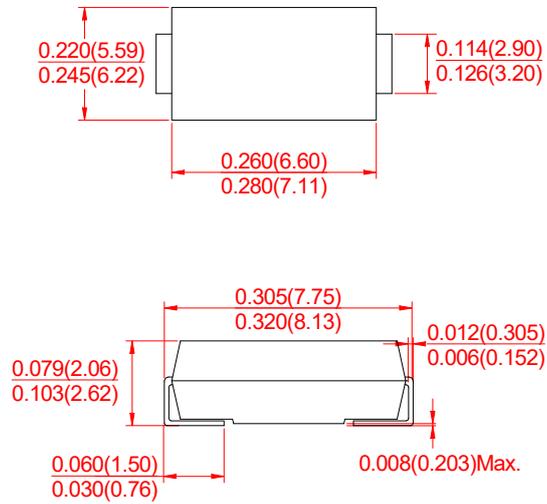

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [SINO-IC](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)  
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-](#)  
[HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#)  
[1SMB33CAT3G-XYZ](#) [MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#)