

SS32 thru SS310
Surface Mount Schottky Barrier Rectifiers


FEATURES

- For surface mounted applications
- Metal-Semiconductor junction with guarding
- Epitaxial construction
- Very low forward voltage drop
- High current capability
- Plastic material has UL flammability classification 94V-0
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.

MECHANICAL DATA

- Case: Molded Plastic
- Polarity: Indicated by cathode band

SMA/SMB/SMC



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS(25°C)

Parameter	Symbol	SS32	SS33	SS34	SS35	SS36	SS38	SS 310	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	100	V
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	56	70	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	80	100	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	3.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load	I_{FSM}	80							A
Maximum Instantaneous Forward Voltage @3.0 A	V_F	0.45	0.55	0.60	0.70		0.85		V
Maximum DC Reverse Current TA=25°C At Rated DC Blocking Voltage TA=100°C	I_R	1.0 20							mA
Thermal resistance from junction to lead	$R_{\theta JL}$	10							°C /W
Thermal resistance from junction to ambient	$R_{\theta JA}$	50							°C /W
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150							°C

RATING AND CHARACTERISTIC CURVES

FIG. 1 - FORWARD CURRENT DERATING CURVE

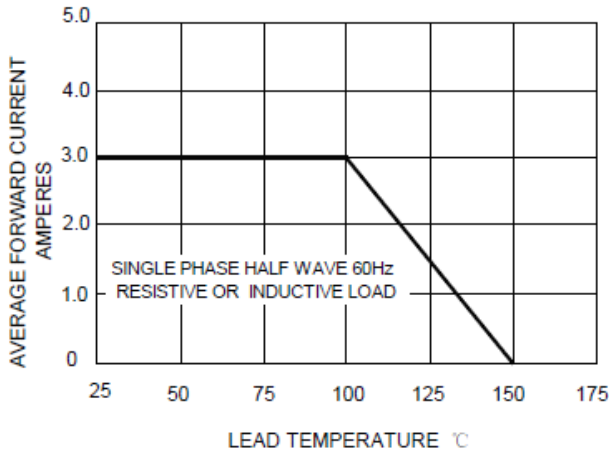


FIG. 2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

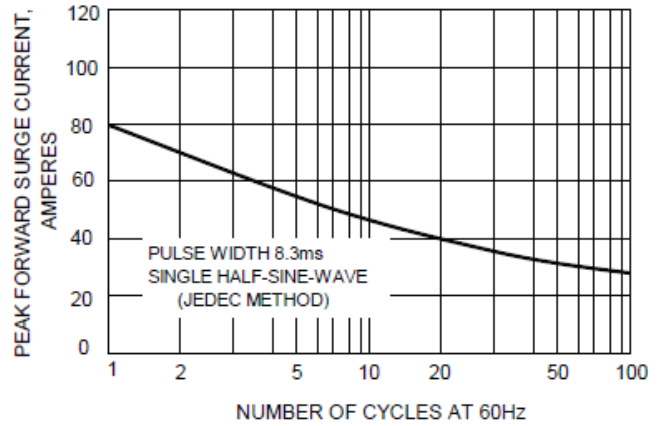


FIG. 3-TYPICAL FORWARD CHARACTERISTICS

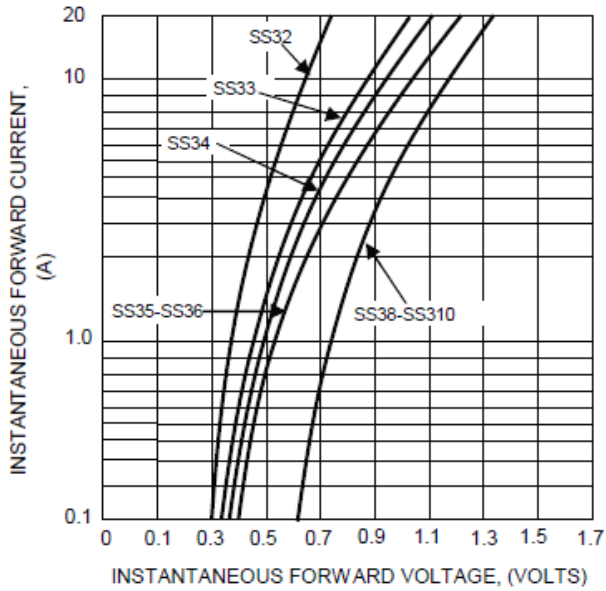


FIG. 4-TYPICAL JUNCTION CAPACITANCE



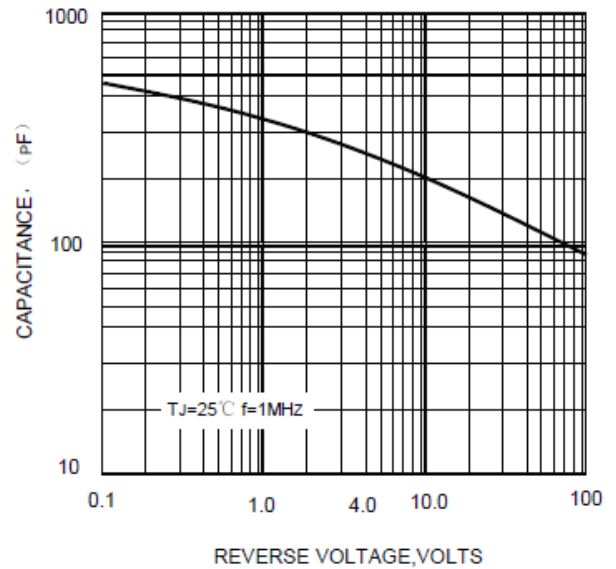


FIG. 5-TYPICAL REVERSE CHARACTERISTICS

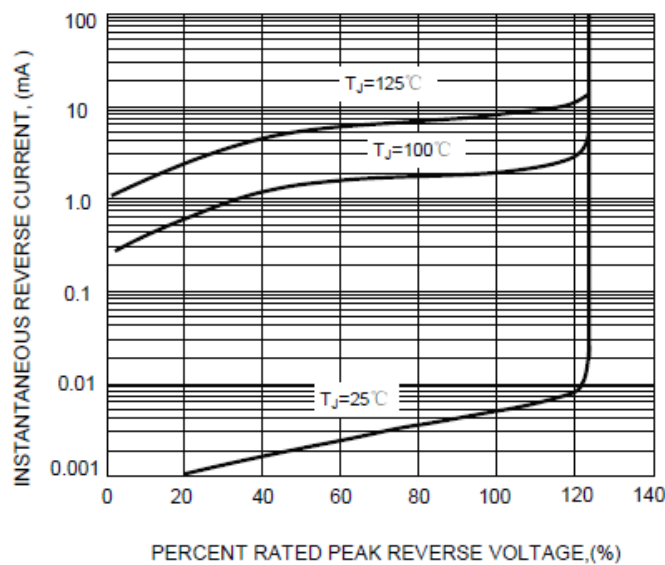


PACKAGE: Dimensions in inches and (millimeter)



SMA

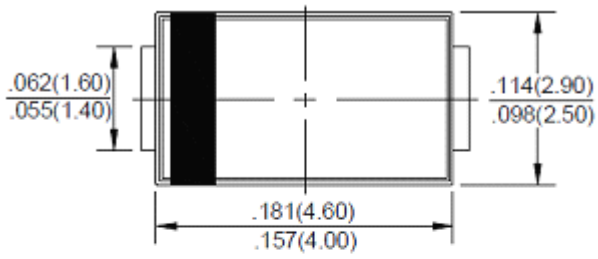

SMB

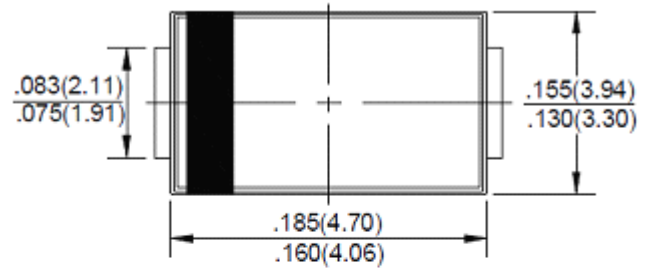

SMC

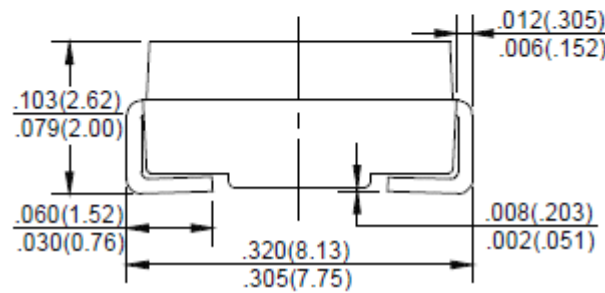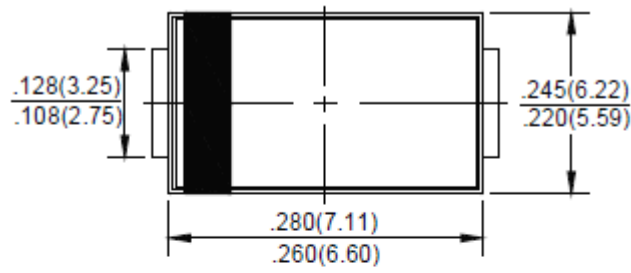

The SINO-IC logo is a registered trademark of ShangHai Sino-IC Microelectronics Co., Ltd.

© 2005 SINO-IC – Printed in China – All rights reserved.

SHANGHAI SINO-IC MICROELECTRONICS CO., LTD

Add: Building 3, Room 3401-03, No.200 Zhangheng Road, ZhangJiang Hi-Tech Park, Pudong,
Shanghai 201204, China

Phone: +86-21-33932402 33932403 33932405 33933508 33933608

Fax: +86-21-33932401

Email: webmaster@sino-ic.com

Website: <http://www.sino-ic.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [sino-ic manufacturer](#):

Other Similar products are found below :

[SE100150GA](#) [SE6003C](#) [SE60120GTS](#) [SE6050B](#) [SE6016B](#) [SE80250GA](#) [SE20040A](#) [SE120120G](#) [SE60300GT](#) [SE80160G](#) [SE6020DB](#)
[SE47NS65TS](#) [SR2100](#) [SE8090A](#) [SE12N65F](#) [SE1991G](#) [SE3060D](#) [SE80160GA](#) [SE1991GA](#) [SE60120B](#) [SE80130GA](#) [SE18NS65A](#)
[SE10060A](#) [SE6880](#) [SE40160A](#) [SED10070GG](#) [SE12060GA](#) [SE60210GA](#) [SMBJ16A](#) [SE4435](#) [SE150180G](#) [SE150180GTS](#) [LT3021](#)
[SE8090G](#) [SE10030A](#) [MM3Z5V6](#) [MM1Z6V2](#) [SE6020B](#) [SE3060K](#) [SE40120A](#) [SE80130G](#) [SE8810\(ESD\)](#) [SE8205A](#) [SED14N65G](#) [SE4610](#)
[SEBLC08C](#) [SED4060GM](#) [SE10060B](#) [SEBLC15C](#) [SE30P12D](#)