

### Features

- Low power consumption
- Low temperature coefficient
- Built-in hysteresis characteristic
- High input voltage (up to 15V)
- Output voltage accuracy: tolerance  $\pm 1\%$  or  $\pm 2\%$
- TO92, SOT89, SOT23 and SOT23-3 package

### Applications

- Battery checkers
- Level selectors
- Power failure detectors
- Microcomputer reset
- Battery memory backup
- Non-volatile RAM signal storage protectors

### General Description

The H70XXA-1 series devices are a set of three terminal low power voltage detectors implemented in CMOS technology. Each voltage detector in the series detects a particular fixed voltage ranging from 2.2V to 7.0V. The voltage detectors consist of a high-precision and low power consumption standard voltage source as well as a comparator,

hysteresis circuit, and an output driver. CMOS technology ensures low power consumption.


Although designed primarily as fixed voltage detectors, these devices can be used with external components to detect user specified threshold voltages.

### Selection Table


| Part No. | Detectable Voltage | Hysteresis Width | Tolerance | Package       | Marking                                   |
|----------|--------------------|------------------|-----------|---------------|---|
| H7022A-1 | 2.2V               | 0.11V            | $\pm 2\%$ | TO92<br>SOT89 | 70XXA-1 (for TO92)<br>70XXA-1 (for SOT89) |
| H7024A-1 | 2.4V               | 0.12V            | $\pm 2\%$ |               |   |
| H7027A-1 | 2.7V               | 0.135V           | $\pm 2\%$ |               |   |
| H7030A-1 | 3.0V               | 0.15V            | $\pm 2\%$ |               |   |
| H7033A-1 | 3.3V               | 0.165V           | $\pm 2\%$ |               |   |
| H7036A-1 | 3.6V               | 0.18V            | $\pm 2\%$ |               |   |
| H7039A-1 | 3.9V               | 0.195V           | $\pm 2\%$ |               |   |
| H7040A-1 | 4.0V               | 0.2V             | $\pm 2\%$ |               |   |
| H7044A-1 | 4.4V               | 0.22V            | $\pm 2\%$ |               |   |
| H7050A-1 | 5.0V               | 0.25V            | $\pm 2\%$ |               |   |
| H7070A-1 | 7.0V               | 0.35V            | $\pm 2\%$ |               |   |

Note: For lead free devices, TO92 package will add a “#” mark at the end of the date code, whereas SOT89 packages will add a “#” mark at the end of the marking.

### Typical Application Circuits

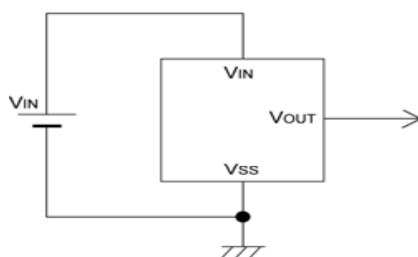

CMOS Output

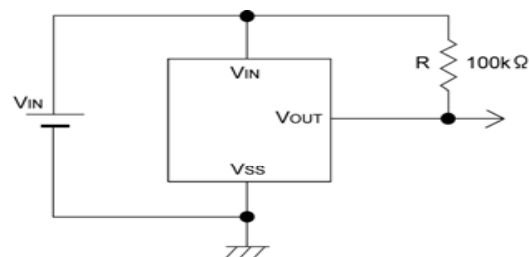

N-ch Open Drain Output


### Order Information

H70①②A-1③④⑤


| Designator | Symbol  | Description              |
|------------|---------|--------------------------|
| ① ②        | Integer | Output Voltage(2.2~7.0V) |
| ③          | N       | NMOS                     |
|            | C       | CMOS                     |
| ④          | T       | Package:TO-92            |
|            | P       | Package:SOT89            |
|            | M       | Package:SOT23-3          |
|            | N       | Package:SOT23            |
| ⑤          | R       | RoHS / Pb Free           |
|            | G       | Halogen Free             |

### Block Diagram

(1) CMOS Output

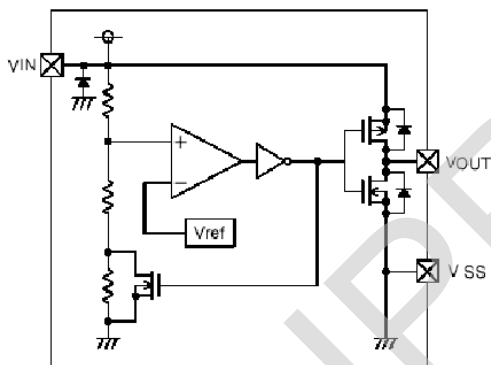


(2) N-ch Open Drain Output

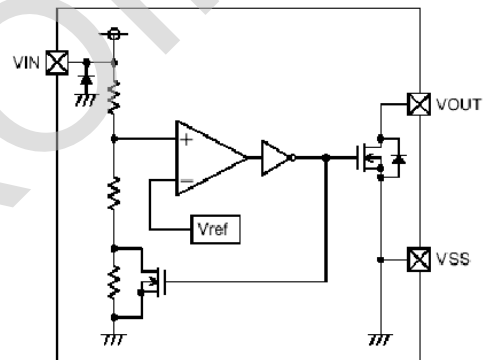


### Output Table & Curve

|           |                       |                          |
|-----------|-----------------------|--------------------------|
| $V_{DD}$  | $V_{DD} > V_{DET}(+)$ | $V_{DD} \leq V_{DET}(-)$ |
| $V_{OUT}$ | Hi-Z                  | $V_{SS}$                 |

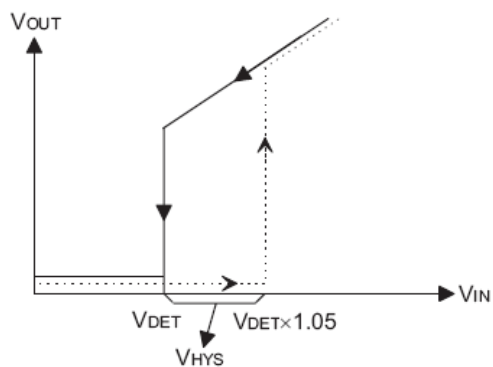

Dash line ...  $V_{IN}$  from Lo  $\rightarrow$  Hi  
Solid line ...  $V_{IN}$  from Hi  $\rightarrow$  Lo

### Pin Assignment

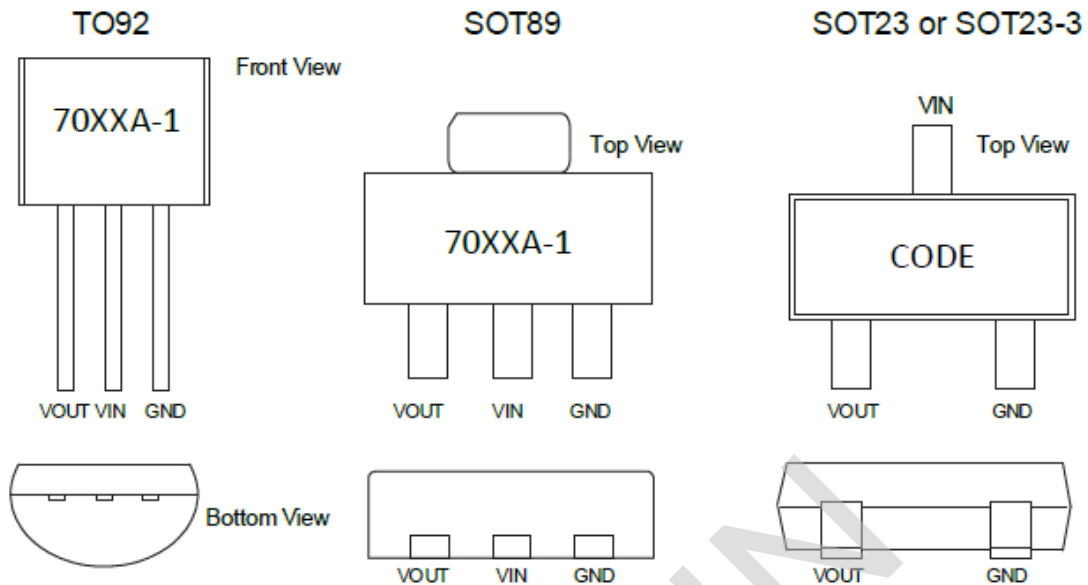

### Absolute Maximum Ratings

|                             |               |                           |                |
|-----------------------------|---------------|---------------------------|----------------|
| Supply Voltage .....        | -0.3V to 16V  | Storage Temperature ..... | -50°C to 125°C |
| Operating Temperature ..... | -40°C to 85°C |                           |                |

Note: These are stress ratings only. Stresses exceeding the range specified under “Absolute Maximum Ratings” may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

### Thermal Information

| Symbol        | Parameter  | Package | Max. | Unit |
|---------------|--|---------|------|------|
| $\theta_{JA}$ | Thermal Resistance (Junction to Ambient) (Assume no ambient airflow, no heat sink) | SOT23   | 500  | °C/W |
|               |  | SOT89   | 200  | °C/W |
|               |  | TO92    | 200  | °C/W |
| $P_D$         | Power Dissipation  | SOT23   | 0.20 | W    |
|               |  | SOT89   | 0.50 | W    |
|               |  | TO92    | 0.50 | W    |

Note:  $P_D$  is measured at  $T_a = 25^\circ\text{C}$

### Electrical Characteristics

**H7022A-1XXX**
**Ta=25°C**

| Symbol                              | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-------------------------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                                     |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>                    | Detection Voltage       | -               | -                      | 2.156                    | 2.200                    | 2.244                   | V     |
| V <sub>HYS</sub>                    | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>                     | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μA    |
| V <sub>DD</sub>                     | Operating Voltage       | -               | -                      | 1.5                      | -                        | 16                      | V     |
| I <sub>OL</sub>                     | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 0.5                      | 1                        | -                       | mA    |
| $\frac{\Delta V_{DET}}{\Delta T_a}$ | Temperature Coefficient | -               | 0°C < Ta < 70°C        | -                        | ±0.9                     | -                       | mV/°C |

**H7024A-1XXX**
**Ta=25°C**

| Symbol                              | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-------------------------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                                     |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>                    | Detection Voltage       | -               | -                      | 2.352                    | 2.400                    | 2.448                   | V     |
| V <sub>HYS</sub>                    | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>                     | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μA    |
| V <sub>DD</sub>                     | Operating Voltage       | -               | -                      | 1.5                      | -                        | 16                      | V     |
| I <sub>OL</sub>                     | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 0.5                      | 1                        | -                       | mA    |
| $\frac{\Delta V_{DET}}{\Delta T_a}$ | Temperature Coefficient | -               | 0°C < Ta < 70°C        | -                        | ±0.9                     | -                       | mV/°C |

**H7027A-1XXX**
**Ta=25°C**

| Symbol                              | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-------------------------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                                     |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>                    | Detection Voltage       | -               | -                      | 2.646                    | 2.700                    | 2.754                   | V     |
| V <sub>HYS</sub>                    | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>                     | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μA    |
| V <sub>DD</sub>                     | Operating Voltage       | -               | -                      | 1.5                      | -                        | 16                      | V     |
| I <sub>OL</sub>                     | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 0.5                      | 1                        | -                       | mA    |
| $\frac{\Delta V_{DET}}{\Delta T_a}$ | Temperature Coefficient | -               | 0°C<Ta<70°C            | -                        | ±0.9                     | -                       | mV/°C |

**H7030A-1XXX**
**Ta=25°C**

| Symbol                              | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-------------------------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                                     |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>                    | Detection Voltage       | -               | -                      | 2.940                    | 3.000                    | 3.060                   | V     |
| V <sub>HYS</sub>                    | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>                     | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μA    |
| V <sub>DD</sub>                     | Operating Voltage       | -               | -                      | 1.5                      | -                        | 16                      | V     |
| I <sub>OL</sub>                     | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 1.2                      | 2.5                      | -                       | mA    |
| $\frac{\Delta V_{DET}}{\Delta T_a}$ | Temperature Coefficient | -               | 0°C<Ta<70°C            | -                        | ±0.9                     | -                       | mV/°C |

**H7033A-1XXX**
**Ta=25°C**

| Symbol                              | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-------------------------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                                     |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>                    | Detection Voltage       | -               | -                      | 3.234                    | 3.300                    | 3.366                   | V     |
| V <sub>HYS</sub>                    | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>                     | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μA    |
| V <sub>DD</sub>                     | Operating Voltage       | -               | -                      | 1.5                      | -                        | 16                      | V     |
| I <sub>OL</sub>                     | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 1.2                      | 2.5                      | -                       | mA    |
| $\frac{\Delta V_{DET}}{\Delta T_a}$ | Temperature Coefficient | -               | 0°C<Ta<70°C            | -                        | ±0.9                     | -                       | mV/°C |

**H7036A-1XXX**
**Ta=25°C**

| Symbol                              | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-------------------------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                                     |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>                    | Detection Voltage       | -               | -                      | 3.528                    | 3.600                    | 3.672                   | V     |
| V <sub>HYS</sub>                    | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>                     | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μA    |
| V <sub>DD</sub>                     | Operating Voltage       | -               | -                      | 1.5                      | -                        | 16                      | V     |
| I <sub>OL</sub>                     | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 1.2                      | 2.5                      | -                       | mA    |
| $\frac{\Delta V_{DET}}{\Delta T_a}$ | Temperature Coefficient | -               | 0°C<Ta<70°C            | -                        | ±0.9                     | -                       | mV/°C |

**H7039A-1XXX**
**Ta=25°C**

| Symbol                              | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-------------------------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                                     |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>                    | Detection Voltage       | -               | -                      | 3.822                    | 3.900                    | 3.978                   | V     |
| V <sub>HYS</sub>                    | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>                     | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μA    |
| V <sub>DD</sub>                     | Operating Voltage       | -               | -                      | 1.5                      | -                        | 16                      | V     |
| I <sub>OL</sub>                     | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 1.2                      | 2.5                      | -                       | mA    |
| $\frac{\Delta V_{DET}}{\Delta T_a}$ | Temperature Coefficient | -               | 0°C < Ta < 70°C        | -                        | ±0.9                     | -                       | mV/°C |

**H7040A-1XXX**
**Ta=25°C**

| Symbol                              | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-------------------------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                                     |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>                    | Detection Voltage       | -               | -                      | 3.920                    | 4.000                    | 4.080                   | V     |
| V <sub>HYS</sub>                    | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>                     | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μA    |
| V <sub>DD</sub>                     | Operating Voltage       | -               | -                      | 1.5                      | -                        | 16                      | V     |
| I <sub>OL</sub>                     | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 1.2                      | 2.5                      | -                       | mA    |
| $\frac{\Delta V_{DET}}{\Delta T_a}$ | Temperature Coefficient | -               | 0°C < Ta < 70°C        | -                        | ±0.9                     | -                       | mV/°C |

**H7044A-1XXX**
**Ta=25°C**

| Symbol                              | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-------------------------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                                     |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>                    | Detection Voltage       | -               | -                      | 4.312                    | 4.400                    | 4.488                   | V     |
| V <sub>HYS</sub>                    | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>                     | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μA    |
| V <sub>DD</sub>                     | Operating Voltage       | -               | -                      | 1.5                      | -                        | 16                      | V     |
| I <sub>OL</sub>                     | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 3                        | 6                        | -                       | mA    |
| $\frac{\Delta V_{DET}}{\Delta T_a}$ | Temperature Coefficient | -               | 0°C < Ta < 70°C        | -                        | ±0.9                     | -                       | mV/°C |

**H7050A-1XXX**
**Ta=25°C**

| Symbol                              | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-------------------------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                                     |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>                    | Detection Voltage       | -               | -                      | 4.900                    | 5.000                    | 5.100                   | V     |
| V <sub>HYS</sub>                    | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>                     | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μA    |
| V <sub>DD</sub>                     | Operating Voltage       | -               | -                      | 1.5                      | -                        | 16                      | V     |
| I <sub>OL</sub>                     | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 3                        | 6                        | -                       | mA    |
| $\frac{\Delta V_{DET}}{\Delta T_a}$ | Temperature Coefficient | -               | 0°C < Ta < 70°C        | -                        | ±0.9                     | -                       | mV/°C |



H7070A-1XXX

Ta=25°C


| Symbol                              | Parameter               | Test Conditions |                        | Min.                     | Typ.                     | Max.                    | Unit  |
|-------------------------------------|-------------------------|-----------------|------------------------|--------------------------|--------------------------|-------------------------|-------|
|                                     |                         | V <sub>DD</sub> | Conditions             |                          |                          |                         |       |
| V <sub>DET</sub>                    | Detection Voltage       | -               | -                      | 6.860                    | 7.000                    | 7.140                   | V     |
| V <sub>HYS</sub>                    | Hysteresis Width        | -               | -                      | 0.02<br>V <sub>DET</sub> | 0.05<br>V <sub>DET</sub> | 0.1<br>V <sub>DET</sub> | V     |
| I <sub>DD</sub>                     | Operating Current       | 8V              | No Load                | -                        | 2                        | 3                       | μA    |
| V <sub>DD</sub>                     | Operating Voltage       | -               | -                      | 1.5                      | -                        | 16                      | V     |
| I <sub>OL</sub>                     | Output Sink Current     | 2V              | V <sub>OUT</sub> =0.2V | 3                        | 6                        | -                       | mA    |
| $\frac{\Delta V_{DET}}{\Delta T_a}$ | Temperature Coefficient | -               | 0°C < Ta < 70°C        | -                        | ±0.9                     | -                       | mV/°C |

### Application Circuits


#### Microcomputer Reset Circuit

Normally a reset circuit is required to protect the microcomputer system from malfunctions due to power line interruptions. The following examples show how different output Configurations perform a reset function in various systems.

NMOS open drain output application for separate power supply

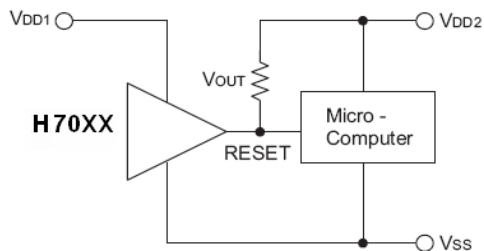


NMOS open drain output application with R-C delay

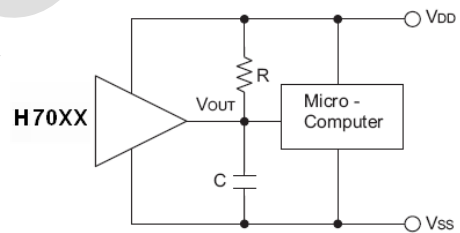


#### Power-on Reset Circuit

With several external components, the NMOS open drain type of the H70XXA-1 series can be used to perform a power-on reset function as shown:

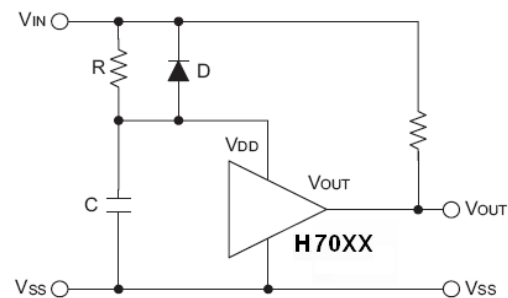


## Low Power Voltage Detector

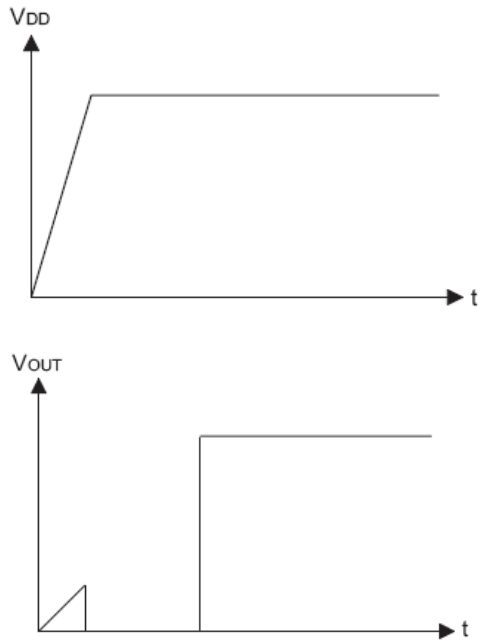


### 5V Power Line Monitoring Circuit

Generally, a minimum operating voltage of 4.5V is guaranteed in a 5V power line system. The H7044A-1YTR is recommended for use as 5V power line monitoring circuit.

5V power line monitor with power-on reset

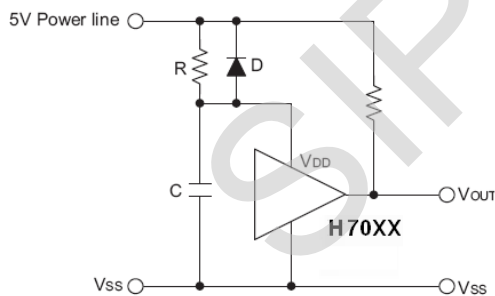


With 5V voltage regulator

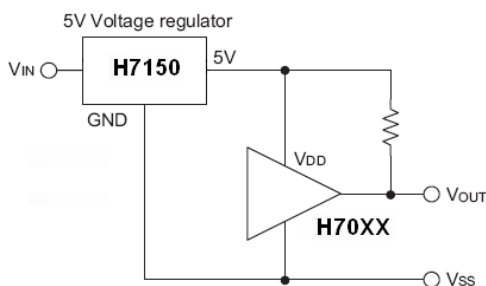

### Change of Detectable Voltage

If the required voltage is not found in the standard product selection table, it


is possible to change it by using external resistance dividers or diodes. Varying the detectable voltage with a resistance divider

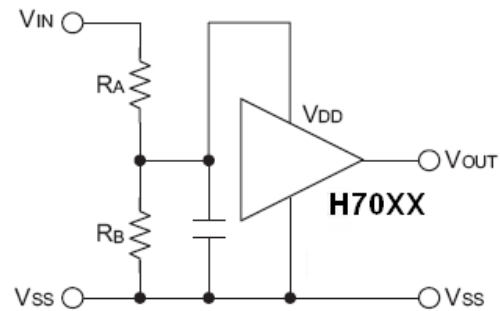

$$\text{Detectable voltage} = \frac{R_A + R_B}{R_B} \times V_{DET}$$

$$\text{Hysteresis width} = \frac{R_A + R_B}{R_B} \times V_{HYS}$$


Varying the detectable voltage with a diode

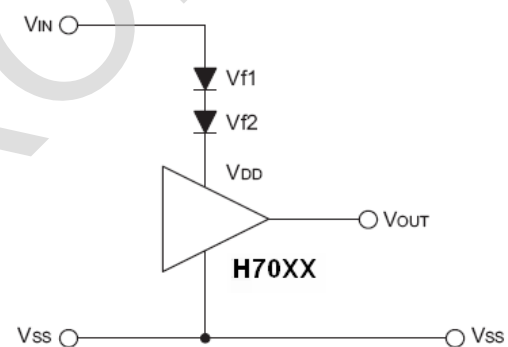

$$\text{Detectable Voltage} = V_{f1} + V_{f2} + V_{DET}$$

### Malfunction Analysis

The following circuit demonstrates the way a circuit analyzes malfunctions by monitoring the variation or spike noise of power supply voltage.

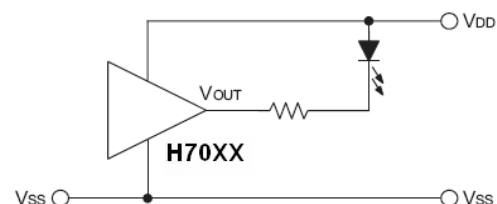


Charge Monitoring Circuit

The following circuit shows a charged monitor for protection against battery



## Low Power Voltage Detector

deterioration by overcharging. When the voltage of the battery is higher than the set detectable voltage, the transistor turns onto bypass the charge current, protecting the battery from overcharging.

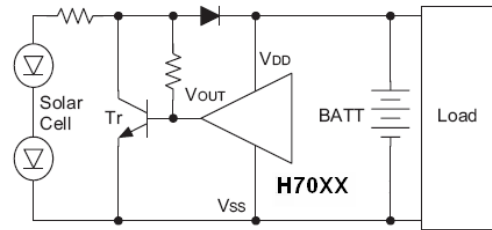


### Level Selector

The following diagram illustrates a logic level selector.

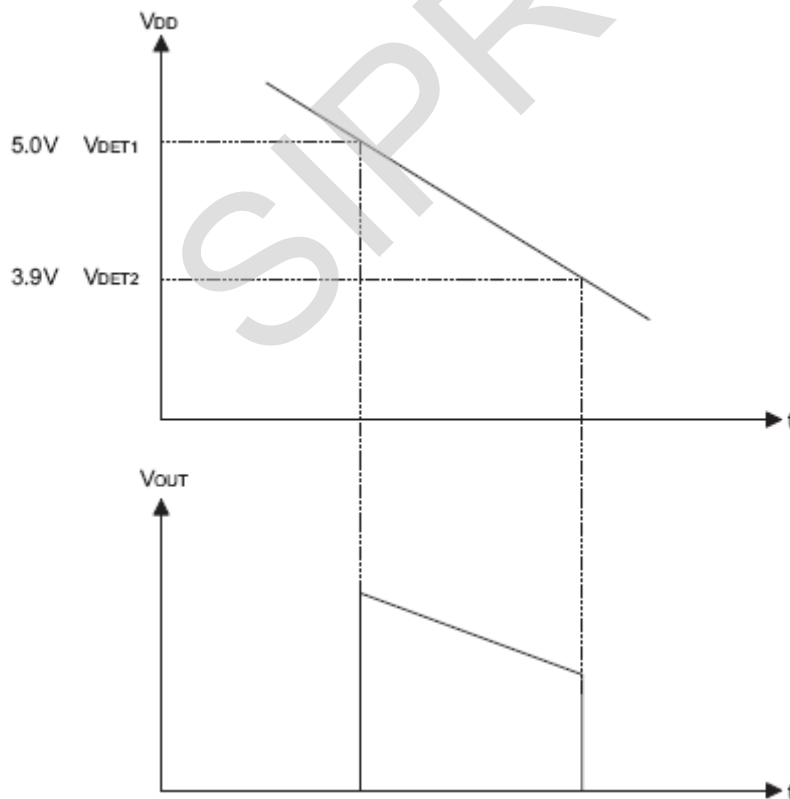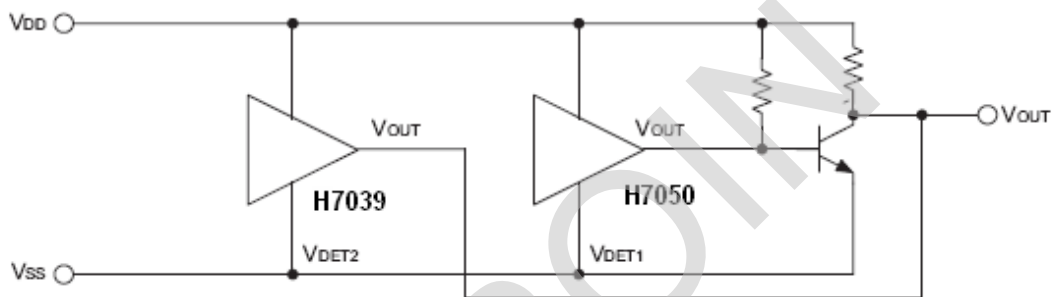


### Package Information

#### 3-pin TO92 Outline Dimensions

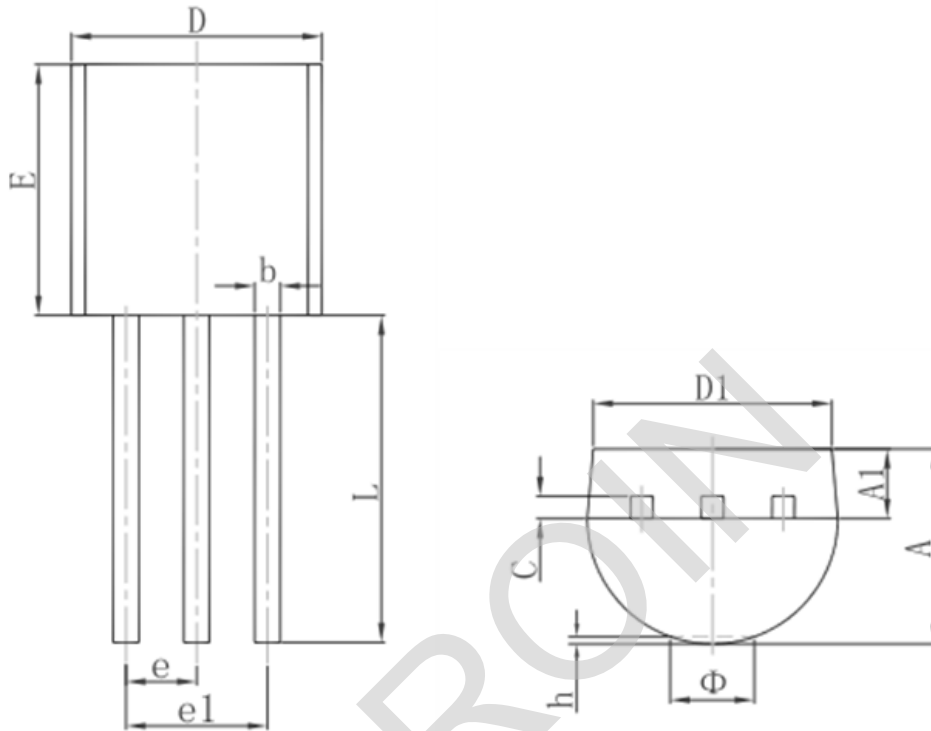


| Symbol | Dimensions In Millimeters |        | Dimensions In Inches |       |
|--------|---------------------------|--------|----------------------|-------|
|        | Min.                      | Max.   | Min.                 | Max.  |
| A      | 3.300                     | 3.700  | 0.130                | 0.146 |
| A1     | 1.100                     | 1.400  | 0.043                | 0.055 |
| b      | 0.380                     | 0.550  | 0.015                | 0.022 |
| c      | 0.360                     | 0.510  | 0.014                | 0.020 |
| D      | 4.300                     | 4.700  | 0.169                | 0.185 |
| D1     | 3.430                     |        | 0.135                |       |
| E      | 4.300                     | 4.700  | 0.169                | 0.185 |
| e      | 1.270 TYP.                |        | 0.050 TYP.           |       |
| e1     | 2.440                     | 2.640  | 0.096                | 0.104 |
| L      | 14.100                    | 14.500 | 0.555                | 0.571 |
| Φ      |                           | 1.600  |                      | 0.063 |
| h      | 0.000                     | 0.380  | 0.000                | 0.015 |

### 3-pin SOT89 Outline Dimensions

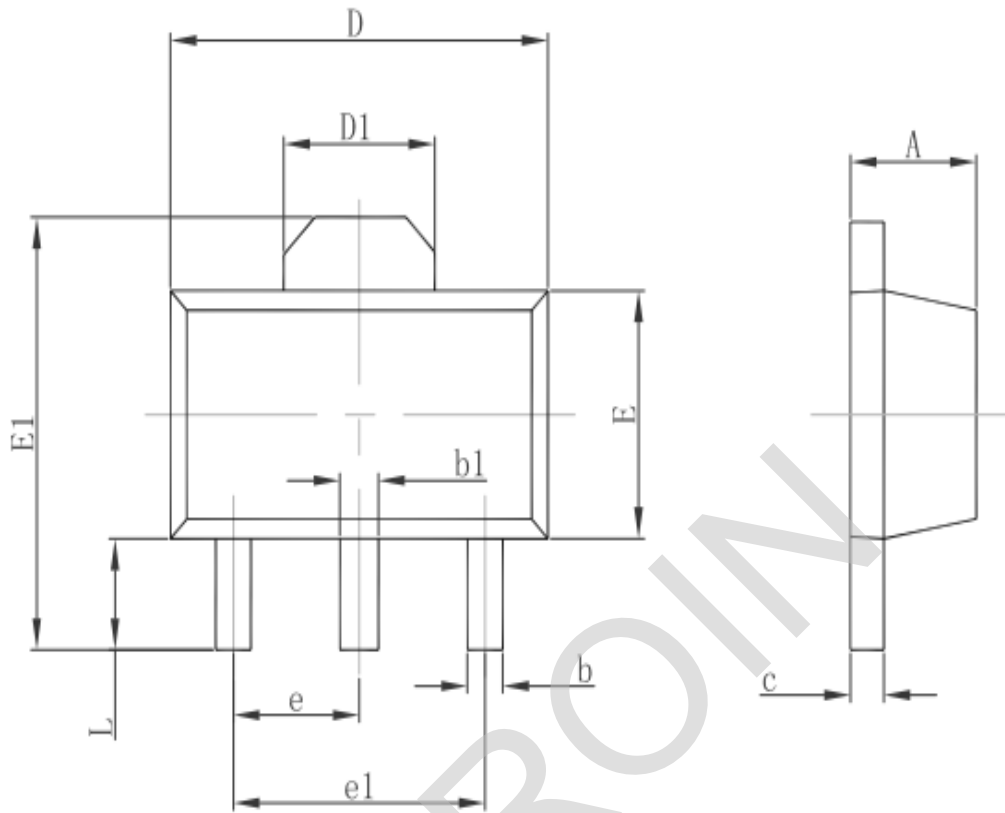


| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min.                      | Max.  | Min.                 | Max.  |
| A      | 1.400                     | 1.600 | 0.055                | 0.063 |
| b      | 0.320                     | 0.520 | 0.013                | 0.020 |
| b1     | 0.400                     | 0.580 | 0.016                | 0.023 |
| c      | 0.350                     | 0.440 | 0.014                | 0.017 |
| D      | 4.400                     | 4.600 | 0.173                | 0.181 |
| D1     | 1.550 REF.                |       | 0.061 REF.           |       |
| E      | 2.300                     | 2.600 | 0.091                | 0.102 |
| E1     | 3.940                     | 4.250 | 0.155                | 0.167 |
| e      | 1.500 TYP.                |       | 0.060 TYP.           |       |
| e1     | 3.000 TYP.                |       | 0.118 TYP.           |       |
| L      | 0.900                     | 1.200 | 0.035                | 0.047 |

### 3-pin SOT23-3 Outline Dimensions

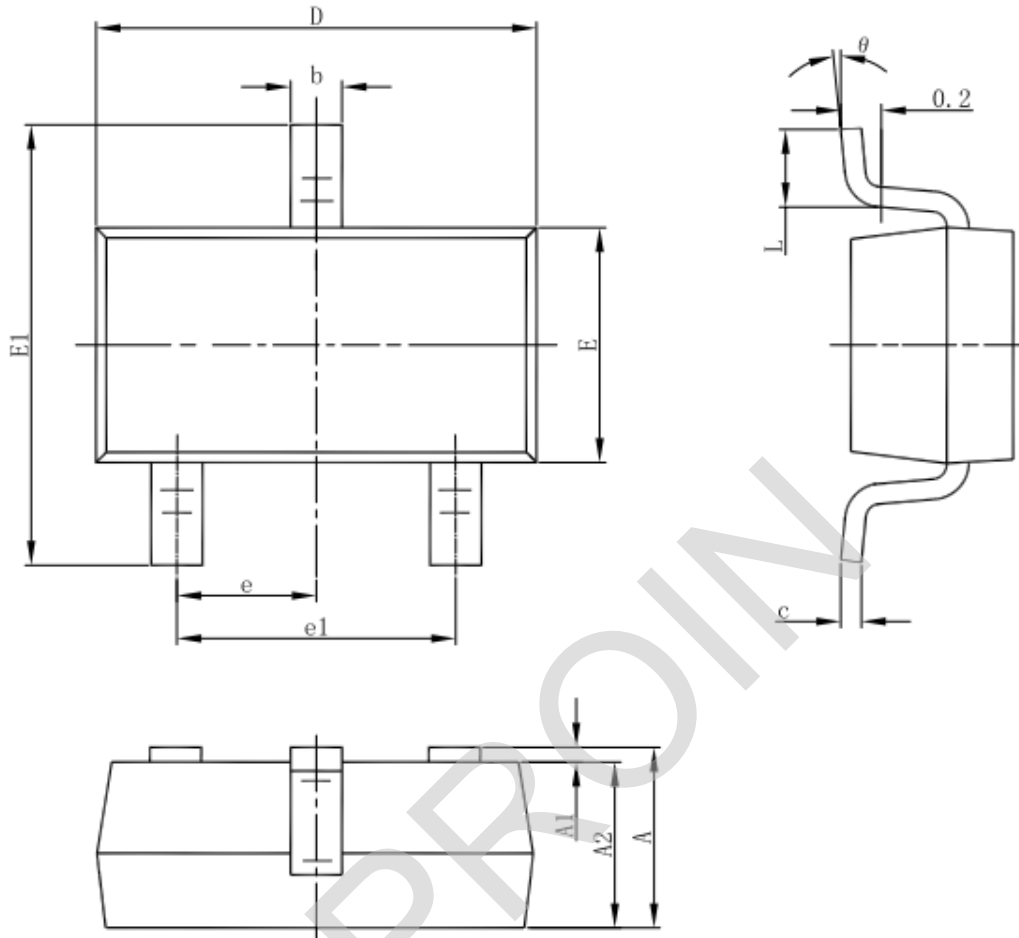

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 1.050                     | 1.250 | 0.041                | 0.049 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2     | 1.050                     | 1.150 | 0.041                | 0.045 |
| b      | 0.300                     | 0.500 | 0.012                | 0.020 |
| c      | 0.100                     | 0.200 | 0.004                | 0.008 |
| D      | 2.820                     | 3.020 | 0.111                | 0.119 |
| E      | 1.500                     | 1.700 | 0.059                | 0.067 |
| E1     | 2.650                     | 2.950 | 0.104                | 0.116 |
| e      | 0.950(BSC)                |       | 0.037(BSC)           |       |
| e1     | 1.800                     | 2.000 | 0.071                | 0.079 |
| L      | 0.300                     | 0.600 | 0.012                | 0.024 |
| theta  | 0°                        | 8°    | 0°                   | 8°    |

### 3-pin SOT23 Outline Dimensions

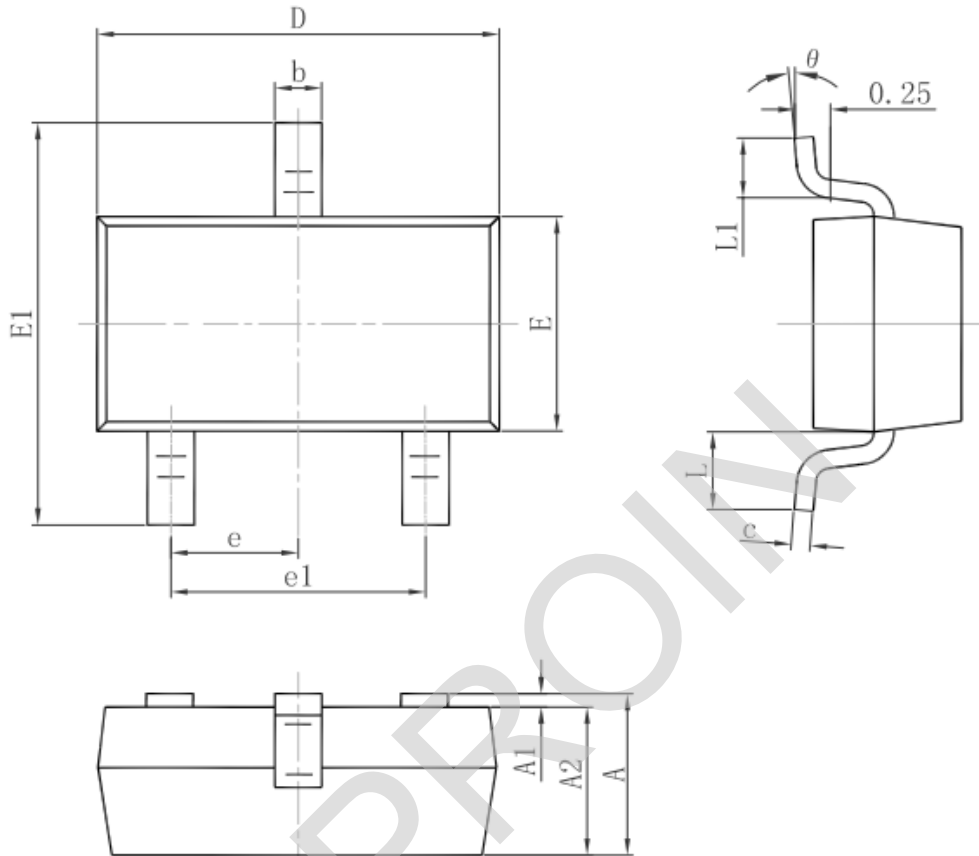

| Symbol   | Dimensions In Millimeters |       | Dimensions In Inches |       |
|----------|---------------------------|-------|----------------------|-------|
|          | Min.                      | Max.  | Min.                 | Max.  |
| A        | 0.900                     | 1.150 | 0.035                | 0.045 |
| A1       | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2       | 0.900                     | 1.050 | 0.035                | 0.041 |
| b        | 0.300                     | 0.500 | 0.012                | 0.020 |
| c        | 0.080                     | 0.150 | 0.003                | 0.006 |
| D        | 2.800                     | 3.000 | 0.110                | 0.118 |
| E        | 1.200                     | 1.400 | 0.047                | 0.055 |
| E1       | 2.250                     | 2.550 | 0.089                | 0.100 |
| e        | 0.950 TYP.                |       | 0.037 TYP.           |       |
| e1       | 1.800                     | 2.000 | 0.071                | 0.079 |
| L        | 0.550 REF.                |       | 0.022 REF.           |       |
| L1       | 0.300                     | 0.500 | 0.012                | 0.020 |
| $\theta$ | 0°                        | 8°    | 0°                   | 8°    |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Microprocessors - MPU category](#):*

*Click to view products by [Siproin manufacturer](#):*

Other Similar products are found below :

[MCIMX6D5EYM12AD](#) [A2C00010998 A](#) [ALXD800EEXJCVD C3](#) [LS1020ASE7KQB](#) [LS1020AXE7KQB](#) [A2C00010729 A](#)  
[T1022NSE7MQB](#) [T1024NXE7PQA](#) [T1042NSN7WQB](#) [MPC8313EVRADDC](#) [BOXSTCK1A8LFCL](#) [LS1021ASE7KQB](#) [LS1021ASN7KQB](#)  
[T1024NXN7MQA](#) [T2080NXE8MQB](#) [T2080NXN8PTB](#) [MCIMX6L3EVN10AB](#) [T2080NXE8PTB](#) [T1024NXE7MQA](#) [CM8063501521600S](#)  
[R19L](#) [LS1043AXE7MQB](#) [T1024NXN7PQA](#) [LS1043ASE7QQB](#) [LS1012AXE7HKA](#) [T4240NSN7PQB](#) [MVF30NN152CKU26](#)  
[FH8067303534005S](#) [R3ZM](#) [R9A07G044L24GBG#AC0](#) [SVF311R3K2CKU2](#) [HW8076502640002S](#) [R38F](#) [R7S721030VLFP#AA0](#)  
[M0516LBN](#) [MCF5208CVM166](#) [MCIMX6S6AVM08AC](#) [MCIMX6U5DVM10AC](#) [TEN54LSDV23GME](#) [MC68302AG33C](#) [MC68302EH16C](#)  
[MCF5233CVM150](#) [MCIMX6D6AVT10AD](#) [MCIMX6G1CVM05AB](#) [MPC8314ECVRAGDA](#) [MPC8314VRAGDA](#) [MPC8315VRAGDA](#)  
[MPC8541VTAPF](#) [PIC16F1828-I/SS](#) [PIC16F690T-I/SS](#) [PIC16F877-20/PQ](#) [PIC16F727-I/PT](#) [PIC16F1823-I/SL](#)