

Features

- Low power consumption
- Low voltage drop
- Low temperature coefficient
- Low Quiescent Current: 3.5uA at 6V
- Output voltage accuracy: tolerance $\pm 2\%$

Applications

- Battery-powered equipment
- Reference voltage sources
- Cameras, video cameras
- Portable AV systems
- Mobile phones
- Portable games


General Description

SSP6206 series are a highly precise, lower consumption, 3 terminal, positive voltage regulators manufactured using CMOS and laser trimming technologies. The series provides large currents with a significantly small dropout voltage.

The SSP6206 consists of a current limiter circuit, a driver transistor, a precision reference voltage and an error correction circuit. The series is compatible with low ESR ceramic capacitors. The

current limiter's foldback circuit operates as a short circuit protection as well as the output current limiter for the output pin. Output voltages are internally by laser trimming technologies. It is selectable in 0.1V increments within a range of 1.2V to 5.0V. SSP6206 series are available in SOT-23, SOT23-3 and SOT89 packages.

Typical Application

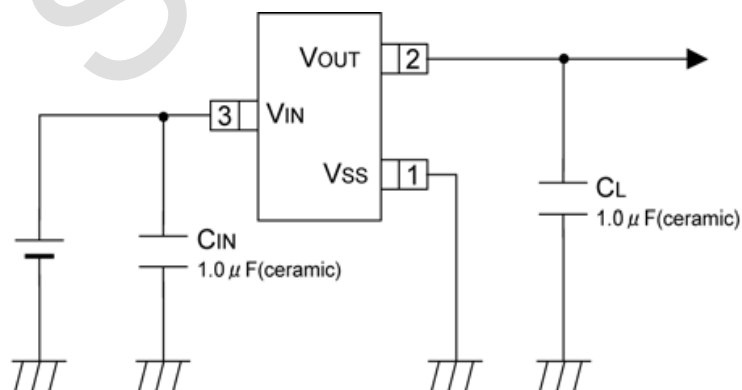


Order Information

SSP6206-①②③④


| Designator | Symbol | Description |
|------------|---------|---------------------------|
| ① ② | Integer | Output Voltage(1.2V~5.0V) |
| ③ | N | Package:SOT23 |
| | M | Package:SOT23-3 |
| | P | Package:SOT89 |
| ④ | R | RoHS / Pb Free |
| | G | Halogen Free |

Note: "①②" stands for output voltages. Other voltages can be specially customized.

Block Diagram

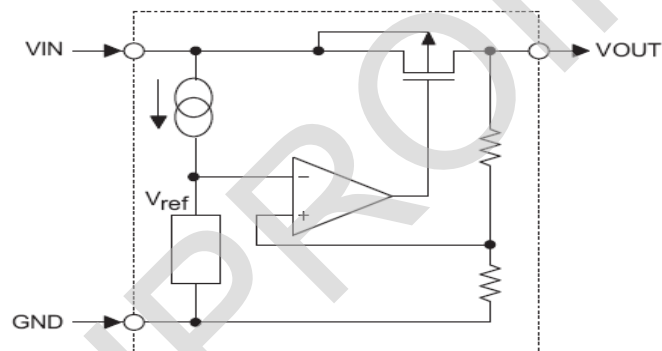

Pin Assignment

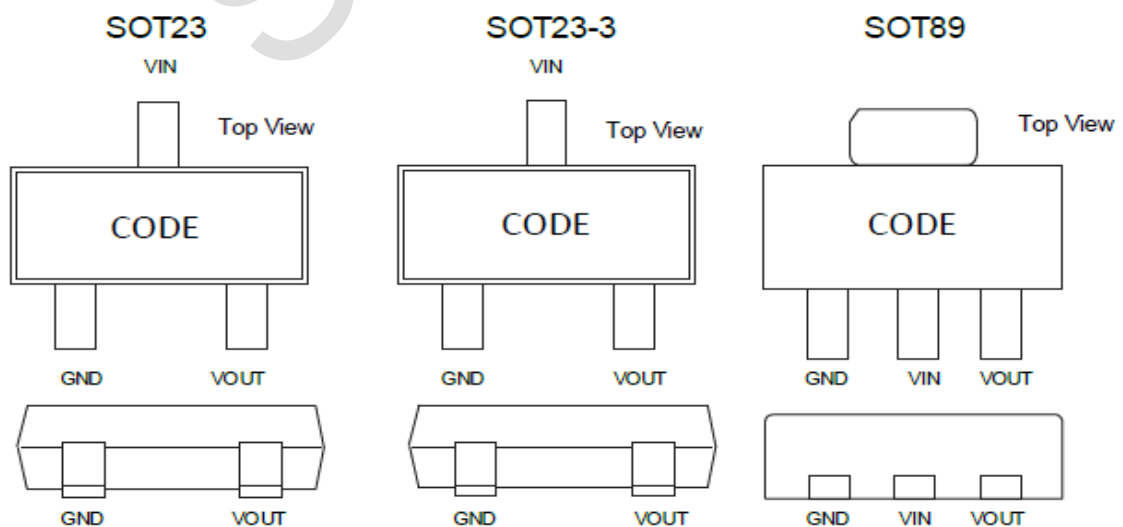

Marking Rule

| Product name | Product code | | | |
|--------------|--------------|-----|-----|-----|
| | (1) | (2) | (3) | (4) |
| SSP6206-12YR | 6 | 5 | B | X |
| SSP6206-15YR | 6 | 5 | E | X |
| SSP6206-18YR | 6 | 5 | K | X |
| SSP6206-25YR | 6 | 5 | T | X |
| SSP6206-28YR | 6 | 5 | X | X |
| SSP6206-30YR | 6 | 5 | Z | X |
| SSP6206-33YR | 6 | 6 | 2 | X |
| SSP6206-36YR | 6 | 6 | 5 | X |
| SSP6206-50YR | 6 | 6 | M | X |

Note: Y: Representative product packaging ,

Absolute Maximum Ratings

| Parameter | | Symbol | Ratings | Units |
|-----------------------------|---------|-----------|-----------------------------|-------|
| Input Voltage | | V_{IN} | 8 | V |
| Output Current | | I_{OUT} | 300* | mA |
| Output Voltage | | V_{OUT} | $V_{SS}-0.3\sim V_{IN}+0.3$ | V |
| Power Dissipation | SOT-23 | P_d | 0.20 | W |
| | SOT23-3 | | 0.25 | W |
| | SOT89 | | 0.50 | W |
| Operating Temperature Range | | T_{opr} | -40~+85 | °C |
| Storage Temperature Range | | T_{stg} | -55~+125 | °C |

* $I_{OUT}=P_d/(V_{IN}-V_{OUT})$

Electrical Characteristics

SSP6206 for any output voltage


(Ta=25°C)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|---|-----------------------------------|--------------------------------|-----------|------|-----------|--------|
| Output Voltage | Vout | Vin=Vout+1V 1.0mA≤Iout≤30mA | Vout×0.98 | -- | Vout×1.02 | V |
| Output Current*1 | Iout | Vin-Vout=1V | -- | 300 | -- | mA |
| Low dropout*2 | Vdrop | Refer to the next table | | | | |
| Line Regulation | $\Delta V_{out}/(V_{in}-V_{out})$ | 1.6V≤Vin≤8V Iout=40mA | -- | 0.05 | 0.2 | %/V |
| Load Regulation | $\Delta V_{out}/\Delta I_{out}$ | Vin=Vout+1V 1.0mA≤Iout≤80mA | -- | 12 | 30 | mV |
| Output voltage Temperature Coefficiency | $\Delta V_{out}/(T_a-V_{out})$ | Iout=30mA 0°C≤Ta≤70°C | -- | ±100 | -- | Ppm/°C |
| Supply Current | Iss1 | -- | -- | 3.5 | 5 | uA |
| Input Voltage | Vin | -- | -- | 6 | 8 | V |
| PSRR | PSRR | F=1KHz Vin=Vout+1V | -- | 50 | -- | dB |
| Output Noise | EN | BW=10Hz~100KHz | -- | 30 | -- | uVrms |

Electrical Characteristics by Output Voltage:


| Output Voltage Vout(V) | Dropout Voltage Vdif (V) | | |
|------------------------|--------------------------|------|------|
| | Conditions | Typ. | Max. |
| Vout≤1.5V | Iout=100 mA | 0.35 | 0.57 |
| 1.8 ≤ Vout ≤ 2 | | 0.28 | 0.42 |
| 2.8 ≤ Vout ≤ 5.0 | | 0.19 | 0.35 |

Package Information
3-pin SOT23 Outline Dimensions

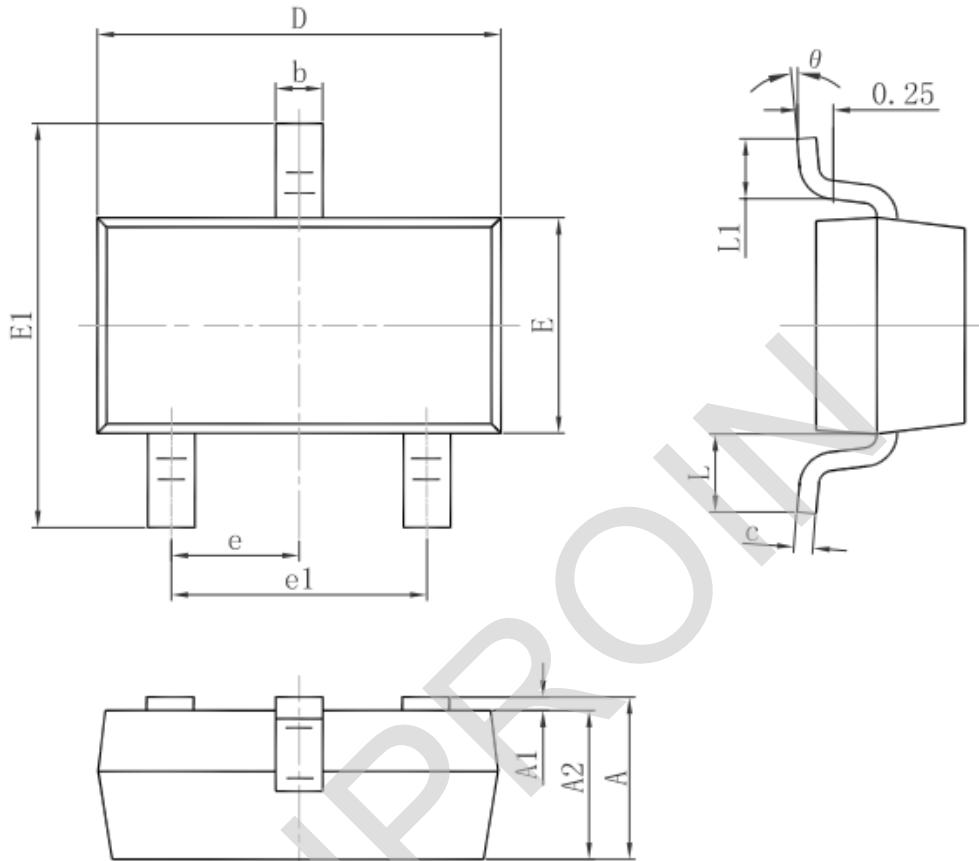


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 0.900 | 1.150 | 0.035 | 0.045 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 0.900 | 1.050 | 0.035 | 0.041 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.080 | 0.150 | 0.003 | 0.006 |
| D | 2.800 | 3.000 | 0.110 | 0.118 |
| E | 1.200 | 1.400 | 0.047 | 0.055 |
| E1 | 2.250 | 2.550 | 0.089 | 0.100 |
| e | 0.950 TYP. | | 0.037 TYP. | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.550 REF. | | 0.022 REF. | |
| L1 | 0.300 | 0.500 | 0.012 | 0.020 |
| θ | 0° | 8° | 0° | 8° |

3-pin SOT23-3 Outline Dimensions

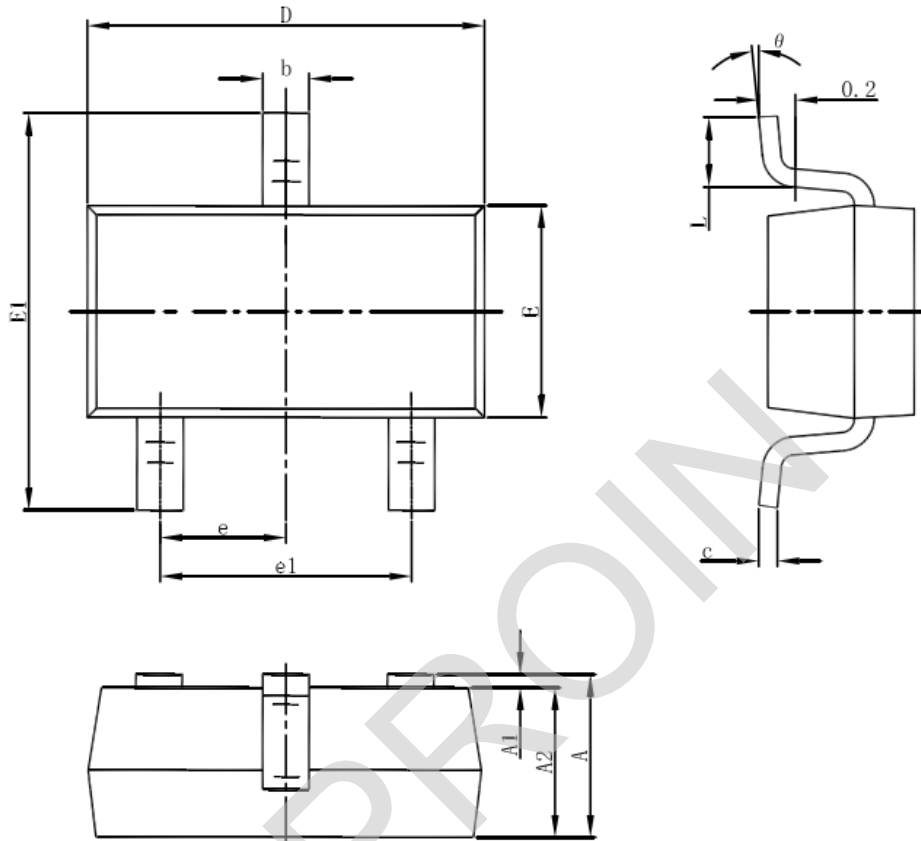

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 1.500 | 1.700 | 0.059 | 0.067 |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950(BSC) | | 0.037(BSC) | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| θ | 0° | 8° | 0° | 8° |

3-pin SOT89 Outline Dimensions

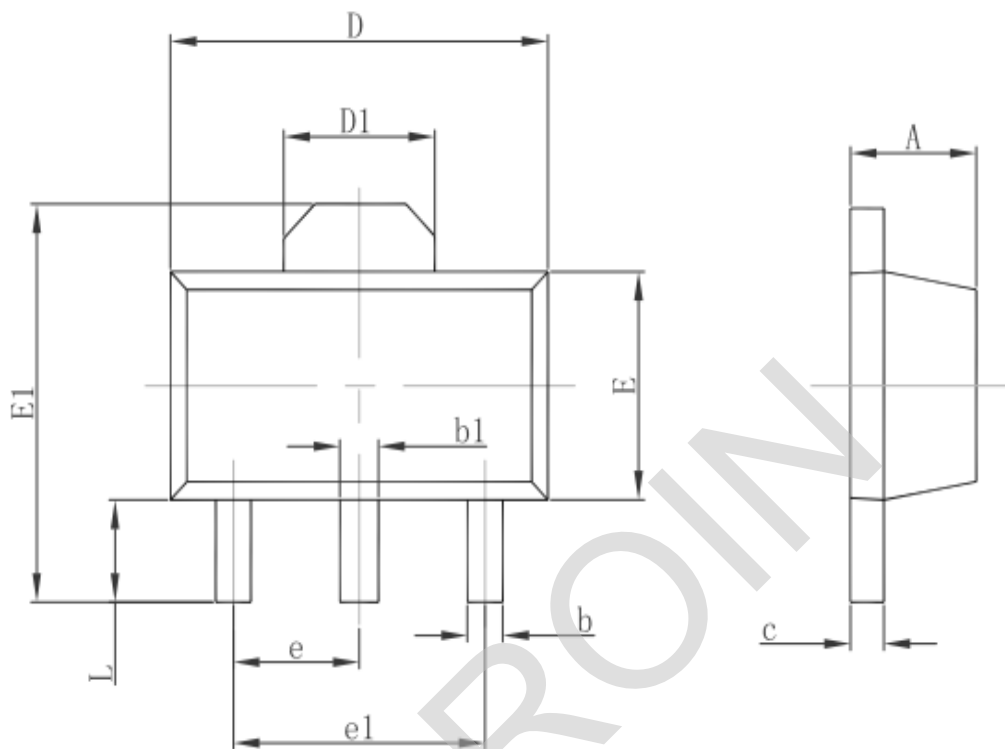

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 1.400 | 1.600 | 0.055 | 0.063 |
| b | 0.320 | 0.520 | 0.013 | 0.020 |
| b1 | 0.400 | 0.580 | 0.016 | 0.023 |
| c | 0.350 | 0.440 | 0.014 | 0.017 |
| D | 4.400 | 4.600 | 0.173 | 0.181 |
| D1 | 1.550 REF. | | 0.061 REF. | |
| E | 2.300 | 2.600 | 0.091 | 0.102 |
| E1 | 3.940 | 4.250 | 0.155 | 0.167 |
| e | 1.500 TYP. | | 0.060 TYP. | |
| e1 | 3.000 TYP. | | 0.118 TYP. | |
| L | 0.900 | 1.200 | 0.035 | 0.047 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [Siproin](#) manufacturer:

Other Similar products are found below :

[LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [LV56801P-E](#) [UA7805CKC](#) [714954EB](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#)

[NCV78M05ABDTRKG](#) [LV5680P-E](#) [L79M05T-E](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#)

[LV5680NPVC-XH](#) [ZTS6538SE](#) [UA78L09CLP](#) [UA78L09CLPR](#) [CAT6221-PPTD-GT3](#) [MC78M09CDTRK](#) [NCV51190MNTAG](#)

[BL1118CS8TR1833](#) [BL8563CKETR18](#) [BL8077CKETR33](#) [BL9153-33CC3TR](#) [BL9161G-15BADRN](#) [BL9161G-28BADRN](#)

[BRCO7530MMC](#) [CJ7815B-TFN-ARG](#) [LM317C](#) [GM7333K](#) [GM7350K](#) [XC6206P332MR](#) [HT7533](#) [LM7912S/TR](#) [LT1764S/TR](#) [LM7805T](#)

[LM338T](#) [LM1117IMP-3.3/TR](#) [HT1117AM-3.3](#) [HT7550S](#) [AMS1117-3.3](#) [HT7150S](#) [78L12](#) [HT7550](#) [HT7533-1](#) [HXY6206I-2.5](#) [HT7133](#)