

## 60V、150mA Low Power LDO

### SSP7985

#### General Description

The SSP7985 series is a group of positive voltage output, three-pin regulators, that provide a high current even when the input/output voltage differential is small. Low power consumption and high accuracy is achieved through CMOS and laser trimming technologies.

The SSP7985 consists of a high-precision voltage reference, an error amplification circuit, and a current limited output driver. Transient response to load variations have improved in comparison to the existing series.



#### Features

- High input voltage: 60V
- Low temperature coefficient
- Built-in current limiter
- High PSRR: 70dB at 1KHz
- Good Transient Response
- Large Output Current: 150mA
- Low Quiescent Current: 2µA
- Output voltage accuracy: tolerance  $\pm 2\%$
- Integrated Short-Circuit Protection
- Dropout Voltage: 70mV@10mA/700mV@100mA
- High Input Voltage Rating: Up to 80V
- Packages: SOT89-3, SOT23-3 and SOT23-5

#### Applications

- Battery-powered equipment
- Smoke detector and sensor
- Home Appliance
- Microcontroller Applications

## Order information

| Product model | Package | Manner of packing | Packing quantity |
|---------------|---------|-------------------|------------------|
| SSP7985PxxPR  | SOT89-3 | Reel              | 1000             |
| SSP7985PxxMR  | SOT23   |                   | 3000             |
| SSP7985PxxM5R | SOT23-5 |                   | 3000             |

## Selection Guide Table


SSP7985P① ② ③ ④

| Designator | Symbol  | Description               |
|------------|---------|---------------------------|
| ① ②        | Integer | Output Voltage(2.5V~5.0V) |
| ③          | P       | Package:SOT89-3           |
|            | M       | Package:SOT23-3           |
|            | M5      | Package:SOT23-5           |
| ④          | R       | RoHS / Pb Free            |
|            | G       | Halogen Free              |


Note: "① ② " stands for output voltages. Other voltages can be specially customized.

| Part No.     | Output Voltage | Package                       |
|--------------|----------------|-------------------------------|
| SSP7985P25XX | 2.5V           | SOT89-3<br>SOT23-3<br>SOT23-5 |
| SSP7985P27XX | 2.7V           |                               |
| SSP7985P30XX | 3.0V           |                               |
| SSP7985P33XX | 3.3V           |                               |
| SSP7985P36XX | 3.6V           |                               |
| SSP7985P40XX | 4.0V           |                               |
| SSP7985P44XX | 4.4V           |                               |
| SSP7985P50XX | 5.0V           |                               |

## Functional Block Diagram

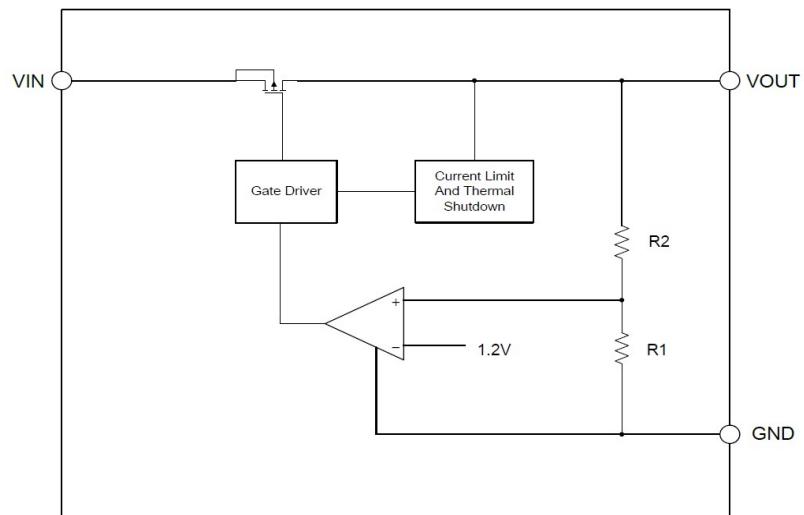

## Pin Assignment

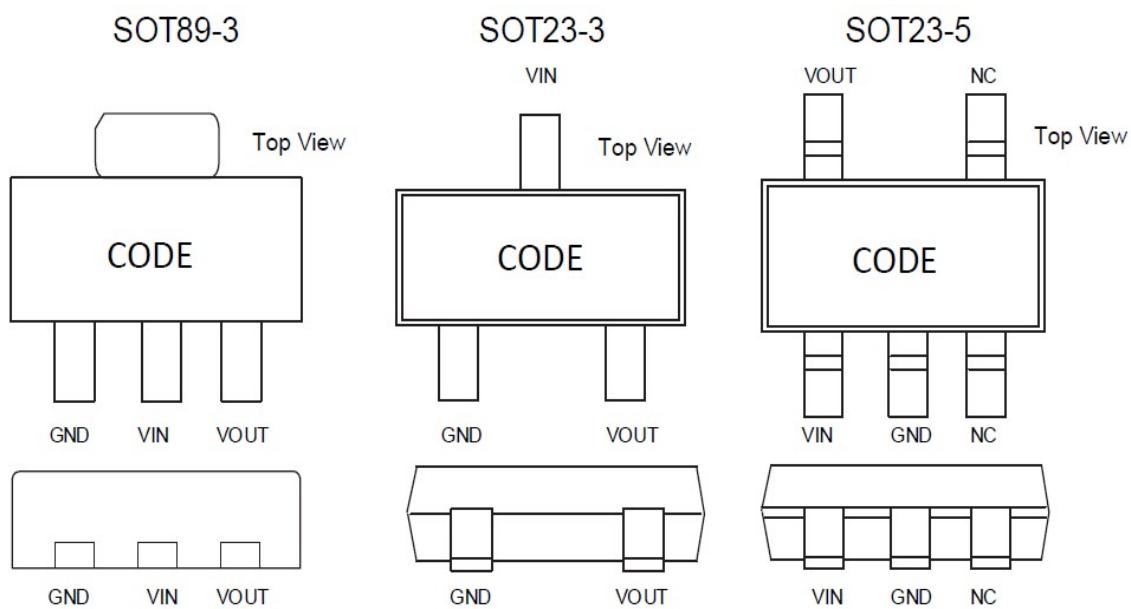

## Absolute Maximum Ratings

| Parameter                                   | Description                     | Min   | Max | Unit |
|---|---------------------------------|-------|-----|------|
| Voltage                                     | VIN Pin to GND Pin              | -0.3  | 80  | V    |
|   | VOUT Pin to GND pin             | -0.3  | 6   | V    |
|   | VOUT Pin to VIN Pin             | -35   | 0.3 | V    |
| Current                                     | Peak output                     | 250mA |     |      |
| Temperature                                 | Operating Ambient Temperature   | -40   | 85  | °C   |
|   | Storage Temperature             | -40   | 150 | °C   |
|   | junction temperature, operating | -     | 150 | °C   |
| Thermal Resistance<br>(Junction to Ambient) | SOT89-3                         | 180   |     | °C/W |
|   | SOT23-3                         | 380   |     | °C/W |
|   | SOT23-5                         | 300   |     | °C/W |
| Power Dissipation                           | SOT89-3                         | 600   |     | mW   |
|   | SOT23-3                         | 300   |     | mW   |
|   | SOT23-5                         | 400   |     | mW   |
| Electrostatic discharge<br>rating           | Human Body Model (HBM)          | 4     | kV  |      |
|   | Charged Device Model (MM)       | 100   | V   |      |

Note: These are just the limit parameters. Beyond the range specified in the Absolute Maximum Ratings may cause serious damage to the equipment. Long exposure to extreme conditions may affect the reliability of the device.


## Electrical Characteristics

(At TA=25°C, CIN=1uF, VIN=VOUTNOM+1.0V, COUT=10μF, unless otherwise noted)

| Parameter                    | Symbol  | Test Conditions  | MIN                           | TYP                 | MAX                           | UNIT |
|------------------------------|---|--|-------------------------------|---------------------|-------------------------------|------|
| Input Voltage                | V <sub>IN</sub>                                       |  | 5                             | —                   | 60                            | V    |
| Quiescent Current            | I <sub>GND</sub>                                      | V <sub>IN</sub> =12V, No load  | —                             | 2                   | —                             | μA   |
| Output Voltage               | V <sub>OUT</sub>                                      | V <sub>IN</sub> =12V, I <sub>out</sub> =10mA                                   | V <sub>OUTNOM</sub> *<br>0.98 | V <sub>OUTNOM</sub> | V <sub>OUTNOM</sub> *<br>1.02 | V    |
| Output Current               | I <sub>OUT_MAX</sub>                                  |  | —                             | 150                 | —                             | mA   |
| Dropout Voltage(1)           | V <sub>DROP</sub>                                     | I <sub>OUT</sub> =10mA ,<br>V <sub>IN</sub> =V <sub>OUTNOM</sub> -0.1V         | —                             | 70                  | —                             | mV   |
|                              |   | I <sub>OUT</sub> =100mA ,<br>V <sub>IN</sub> =V <sub>OUTNOM</sub> -0.1V        | —                             | 700                 | —                             | mV   |
| Load Regulation              | ΔV <sub>OUT</sub>                                     | V <sub>IN</sub> =12V,<br>1mA≤I <sub>OUT</sub> ≤100mA                           | —                             | 0.02                | —                             | mV   |
| Line Regulation              | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | I <sub>OUT</sub> =1mA,<br>V <sub>OUTNOM</sub> +0.5V≤V <sub>IN</sub> ≤60V       | —                             | 0.01                | —                             | %/V  |
| Current Limit                | I <sub>LIMIT</sub>                                    |  | —                             | 250                 | —                             | mA   |
| Thermal Shutdown Temperature | T <sub>SHDN</sub>                                     | Shutdown, temperature increasing   | —                             | 150                 | —                             | °C   |
|                              |   | Reset, temperature decreasing  | —                             | 140                 | —                             |      |
| Power Supply Rejection Ratio | PSRR  | V <sub>IN</sub> =12V , I <sub>out</sub> =10mA<br>F=1Khz,V <sub>out</sub> =3.3V | —                             | 70                  | —                             | dB   |


Note:(1)Dropout Voltage is the voltage difference between the input and the output at which the output voltage drops 2% below its nominal value.

## Application Circuits

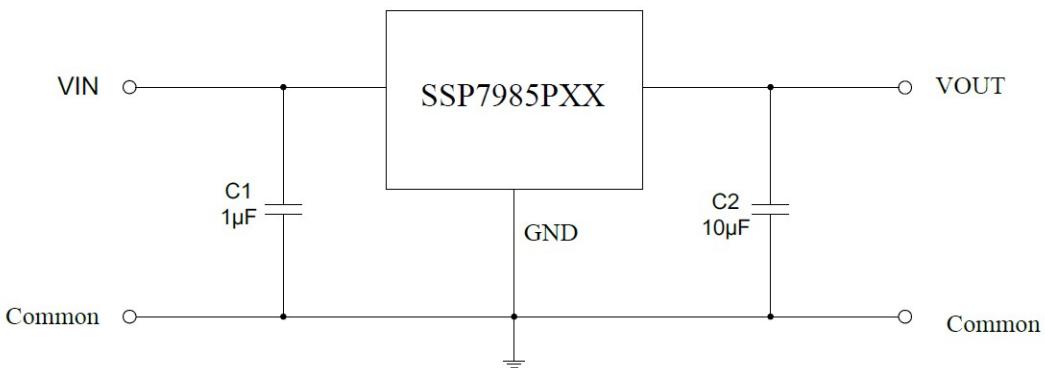


## Package Information

### 3-pin SOT89 Outline Dimensions

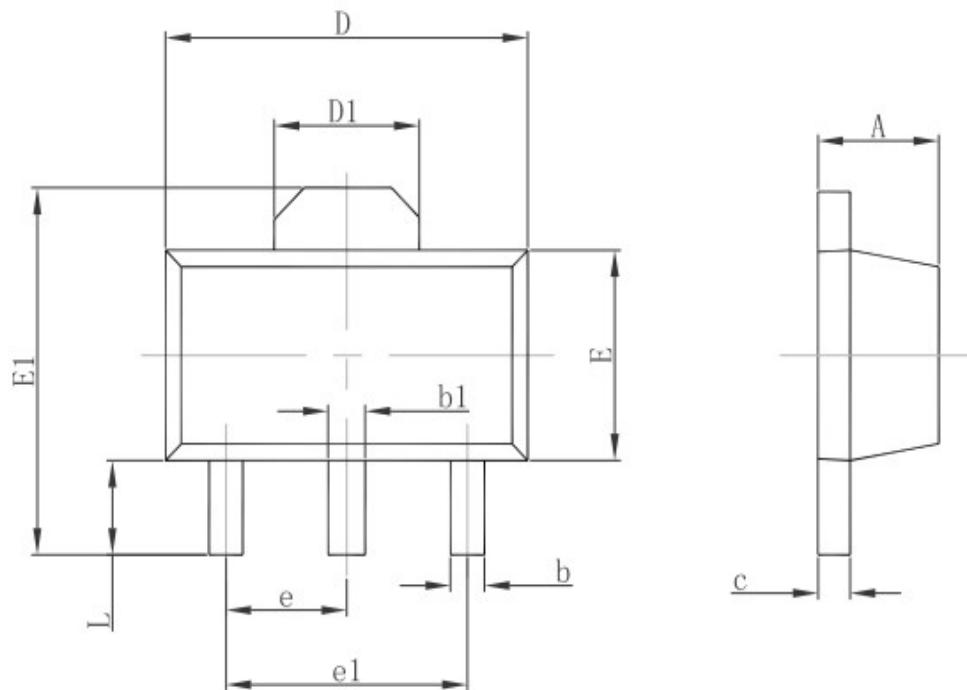


| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 1.400                     | 1.600 | 0.055                | 0.063 |
| b      | 0.320                     | 0.520 | 0.013                | 0.020 |
| b1     | 0.400                     | 0.580 | 0.016                | 0.023 |
| c      | 0.350                     | 0.440 | 0.014                | 0.017 |
| D      | 4.400                     | 4.600 | 0.173                | 0.181 |
| D1     | 1.550 REF                 |       | 0.061 REF            |       |
| E      | 2.300                     | 2.600 | 0.091                | 0.102 |
| E1     | 3.940                     | 4.250 | 0.155                | 0.167 |
| e      | 1.500 TYP                 |       | 0.060 TYP            |       |
| e1     | 3.000 TYP                 |       | 0.118 TYP            |       |
| L      | 0.900                     | 1.200 | 0.035                | 0.047 |

### 3-pin SOT23-3 Outline Dimensions

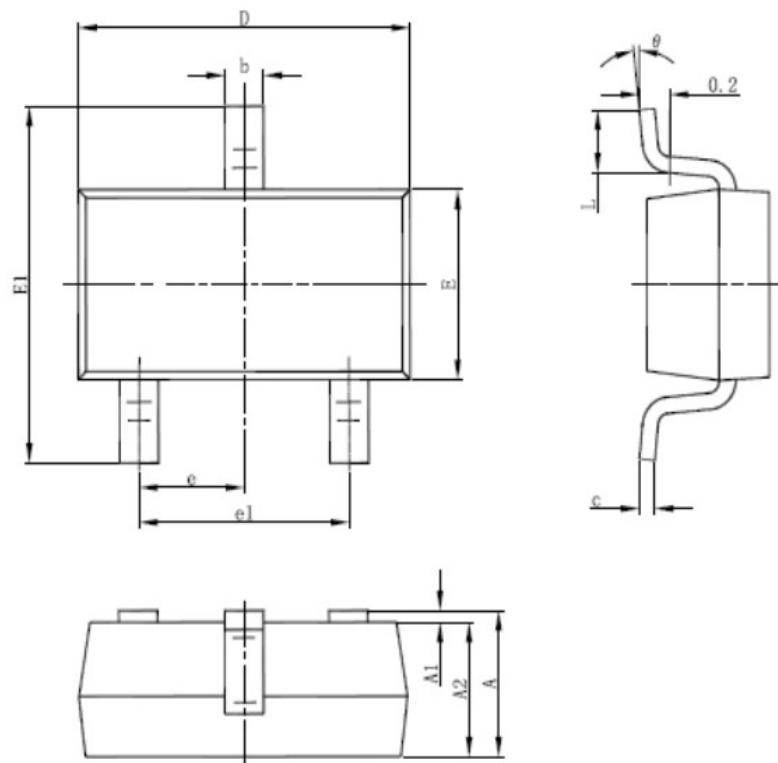

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 1.050                     | 1.250 | 0.041                | 0.049 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2     | 1.050                     | 1.150 | 0.041                | 0.045 |
| b      | 0.300                     | 0.500 | 0.012                | 0.020 |
| c      | 0.100                     | 0.200 | 0.004                | 0.008 |
| D      | 2.820                     | 3.020 | 0.111                | 0.119 |
| E      | 1.500                     | 1.700 | 0.059                | 0.067 |
| E1     | 2.650                     | 2.950 | 0.104                | 0.116 |
| e      | 0.950(BSC)                |       | 0.037(BSC)           |       |
| e1     | 1.800                     | 2.000 | 0.071                | 0.079 |
| L      | 0.300                     | 0.600 | 0.012                | 0.024 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |

## SOT23-5 Outline Dimensions

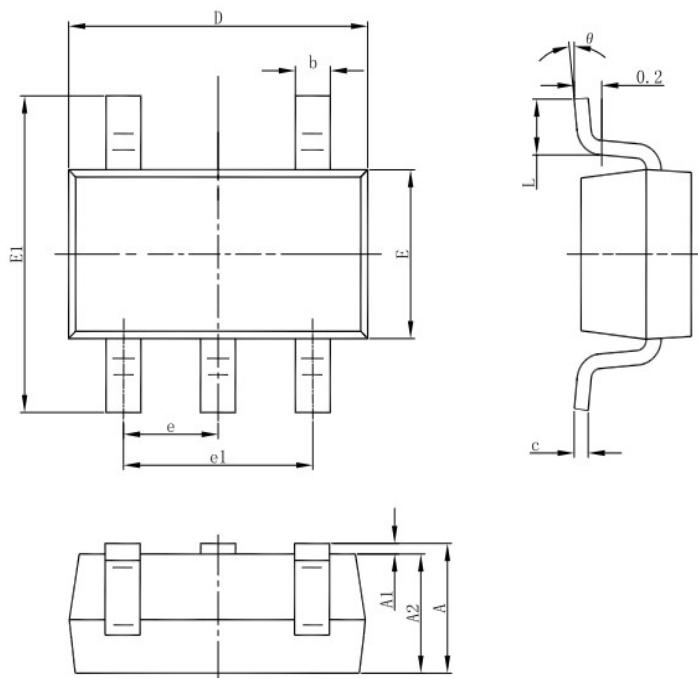

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 1.050                     | 1.250 | 0.041                | 0.049 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2     | 1.050                     | 1.150 | 0.041                | 0.045 |
| b      | 0.300                     | 0.500 | 0.012                | 0.020 |
| c      | 0.100                     | 0.200 | 0.004                | 0.008 |
| D      | 2.820                     | 3.020 | 0.111                | 0.119 |
| E      | 1.500                     | 1.700 | 0.059                | 0.067 |
| E1     | 2.650                     | 2.950 | 0.104                | 0.116 |
| e      | 0.950(BSC)                |       | 0.037(BSC)           |       |
| e1     | 1.800                     | 2.000 | 0.071                | 0.079 |
| L      | 0.300                     | 0.600 | 0.012                | 0.024 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |

## Special Version

The company reserves the right of final interpretation of this specification.

## Version Change Description

Versions: V1.2

Writer: Si Yuan Wu

Time: 2021.10.29

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Linear Voltage Regulators](#) category:***

***Click to view products by [Siproin manufacturer:](#)***

Other Similar products are found below :

[LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [LV56801P-E](#) [UA7805CKC](#) [714954EB](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#)  
[NCV78M05ABDTRKG](#) [LV5680P-E](#) [L79M05T-E](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#)  
[LV5680NPVC-XH](#) [ZTS6538SE](#) [UA78L09CLP](#) [UA78L09CLPR](#) [CAT6221-PPTD-GT3](#) [MC78M09CDTRK](#) [NCV51190MNTAG](#)  
[BL1118CS8TR1833](#) [BL8563CKETR18](#) [BL8077CKETR33](#) [BL9153-33CC3TR](#) [BL9161G-15BADRN](#) [BL9161G-28BADRN](#)  
[BRC07530MMC](#) [CJ7815B-TFN-ARG](#) [LM317C](#) [GM7333K](#) [GM7350K](#) [XC6206P332MR](#) [HT7533](#) [LM7912S/TR](#) [LT1764S/TR](#) [LM7805T](#)  
[LM338T](#) [LM1117IMP-3.3/TR](#) [HT1117AM-3.3](#) [HT7550S](#) [AMS1117-3.3](#) [HT7150S](#) [78L12](#) [HT7550](#) [HT7533-1](#) [HXY6206I-2.5](#) [HT7133](#)