



SNYPER-LTE Graphyte (EU) V1/V2

4G/LTE, 3G/UMTS & 2G/GSM Signal Analyser & Datalogger with liveSCAN

General Description

The SNYPER-LTE Graphyte (EU) is a high performance, multi-language network signal analyser and cellular signal logger, dedicated to surveying and logging the 4G/LTE (EU), 3G/UMTS & 2G/GSM European networks.

The unit can be left to conduct sequential surveys in a fixed location and automatically save them. Four types of survey can be performed: a "FULL" survey (4G, 3G and 2G), 4G/LTE only, 3G/UMTS only & 2G/GSM only.

SNYPER-LTE Graphyte (EU) can save multiple surveys each with different logging options. All survey results can be downloaded to a PC and displayed in a HTML graphical format to clearly show the logged detail over the survey session. This can identify unreliable base-stations & intermittent cellular service which is not possible with spot surveys. The full breakdown for the HTML summary graphs are displayed in corresponding CSV files.

The SNYPER-LTE Graphyte (EU) also incorporates Siretta's leading liveSCAN feature, which allows you to select a base-station signal immediately after a survey, conduct a liveSCAN logging session which can later be analysed in a CSV logged recording.

The SNYPER-LTE Graphyte (EU) is compatible with Siretta's CloudSURVEY integrated mapping portal (registration required).



* Neither SNYPER-LTE Graphyte (EU) V1 nor SNYPER-LTE Graphyte (EU) V2 require a SIM in order to function.

Features



Featured Applications

- » Enhanced cellular surveying & sequential logging of new and existing installations on 4G/3G/2G networks
- » User selectable logging options to determine most reliable mobile operator
- » Evaluate MNO's performance over time
- » Determine "hotspots" & assist with antenna alignment with liveSCAN
- » CSV & graphical HTML survey reports
- » Saves up to 84 single cycle surveys
- » Saves LiveSCAN logs
- » Integrated Mapping Portal enabled (registration required)

SNYPER LTE- Graphyte (EU) V1/V2
Save up to 84 surveys



USB Connection
Download CSV & HTML Files

Downloaded HTML Survey Results





SNYPER-LTE Graphyte (EU) V1/V2

4G/LTE, 3G/UMTS & 2G/GSM Signal Analyser & Datalogger with liveSCAN

General Features

- » SNYPER-LTE Graphyte (EU) V1
 - » 5 Supported Bands LTE
B1(2100) / B3(1800) / B7(2600) / B8(900) / B20(800) MHz
 - » 2 Supported Bands UMTS/HSPA+
B8(900) / B1(2100) MHz
 - » 2 Supported Bands GSM | GPRS
B8(900) / B3(1800) MHz
- » SNYPER-LTE Graphyte (EU) V2
 - » 6 Supported Bands LTE
B1(2100) / B3(1800) / B7(2600) / B8(900) / B20(800) / B28A(700) MHz
 - » 3 Supported Bands UMTS/HSPA+
B8(900) / B1(2100) / B3(1800) MHz
 - » 2 Supported Bands GSM | GPRS
B8(900) / B3(1800) MHz
- » Black antenna for 700MHz to 2300MHz
- » Grey antenna for 2600MHz
- » Directional antenna with 1.5m extension cable
- » Large easy to read LCD display
- » Logical menus and operation
- » Long life rechargeable battery
- » USB cable for PC connection and power/charging
- » USB car charger included
- » Rugged and durable construction
- » Supplied in a hard carrycase
- » Multiple language support
(English/French/German/Italian/Spanish)
- » 3 result modes
Standard/Advanced/Engineer

Interfaces

- » 1 x USB 2.0 FS (12 Mbits/s) for PC interface and for battery charging
- » 1 x SMA female cellular antenna connector
- » 1 x SIM card reader (push-push) 3V, 1.8V
- » Red LED charging indicator
- » Display: 2.4" Diagonal QVGA 240 x 320 RGB TFT with LED backlight
- » Display: 80 degree viewing angle
- » Display Brightness: 500md/m2

Approvals and Compliance

- » CE

Power Supply

- » Mains Input: 100-240V 50/60Hz
- » Multi-region Heads: UK / EU /US / AU
- » Charger O/P: 5V DC 2000mA

Environmental

- » Dimensions
SNYPER: 141mm x 76mm x 36mm
Compact antenna: 78mm x 11mm
Directional antenna: 167mm x 173mm x 27mm
- » Weight
Without antenna: 200 grams
With supplied compact antenna: 207 grams
- » Operating Temperature Range: -10 to +50 deg C
- » Storage Temperature Range: -20 to +50 deg C
- » Operating Humidity Range: 20 to 85% RH Non-condensing
- » Battery: Lithium Ion 3.7V, 2000mAh
- » Life: 48 hours based on 20 surveys /day at room temperature with auto power off enabled





SNYPER-LTE Graphyte (EU) V1/V2

4G/LTE, 3G/UMTS & 2G/GSM Signal Analyser & Datalogger with liveSCAN

Reporting

Survey Logging

(see User Manual for multi-cycle survey storage)

- » Select survey sessions from 1 to 500 sequential recorded surveys
- » Select back-to-back or time lapsed sequential survey recording
- » Calculate seen percentages and signal averages for entire surveyed session

HTML Reporting

- » Graphical display ordered by signal strength
- » Complete summary breakdown for all recorded cells
- » Recorded survey date and time
- » Integrated mapping portal enabled (registration required)

CSV Reporting


- » Complete survey breakdown for each recorded cell

liveSCAN Reporting and Logging

- » Real-time graphical display on SNYPER screen
- » Highlight cellular hotspots and optimised antenna alignment using real-time graph peaks for selected network
- » Record timestamped liveSCAN readings in real time directly to CSV file
- » Recorded time elapsed and signal strength in percentage, RSSI and dBm for chosen cell site

Ordering Information

- » SNYPER-LTE Graphyte (EU) V1: Stock Code: 60596
- » SNYPER-LTE Graphyte (EU) V2: Stock Code: 61764

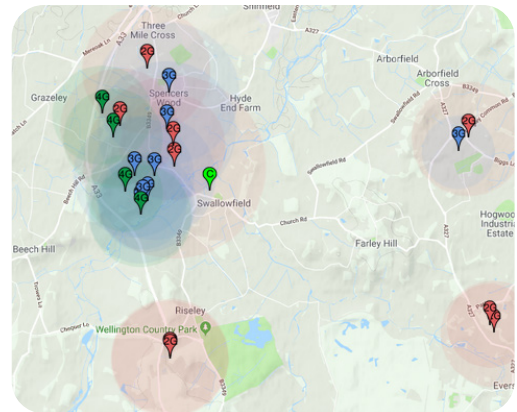

Integrated mapping portal (registration required)



Portable carrycase

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Spectrum Analysers](#) category:

Click to view products by [SIRETTA](#) manufacturer:

Other Similar products are found below :

[GSP-730](#) [PSA2702USC](#) [PSA1302](#) [N9323C/PLG/N9322C-900](#) [N9324C/PLG/N9322C-900](#) [N9321C/PLG/N9322C-900](#) [N9322C](#)
[N9323C/N9322C-903](#) [N9321C/N9322C-903](#) [N9324C/N9322C-903](#) [114991830](#) [SNYPER-LTE GRAPHYTE \(USA\) V2](#) [SNYPER-LTEMGL](#)
[SNYPER-LTE+ \(USA\)v2](#) [T3SA3100](#) [XSA1015-TG](#) [XSA1032-TG](#) [XSA810-TG](#) [2682](#) [2683](#) [PR262](#) [109990009](#) [109990011](#) [109990014](#)
[109990018](#) [109990035](#) [109990063](#) [114990162](#) [RSA306B](#) [T3VNA1500](#)