


HF 400 UF-PVC

HIGH FLEXIBLE AND PERFORMANCE BROADBAND LOW LOSS 50 OHM COAXIAL
COMMUNICATION CABLE DESIGNED FOR USE IN WIRELESS APPLICATIONS

Class CPR **E_{ca}**

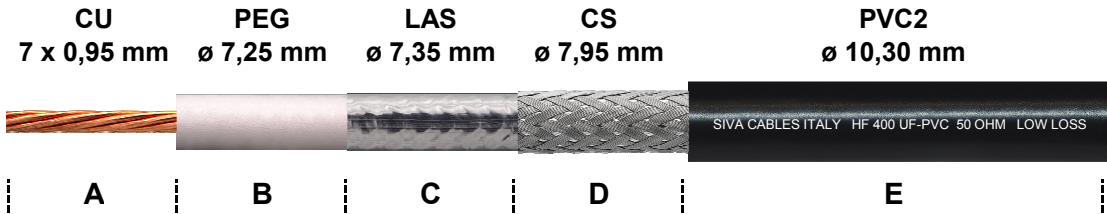

MECHANICAL DATA

A	INNER CONDUCTOR	PLAIN COPPER	7 x 0,95 mm
B	DIELECTRIC	GAS INJECTED SKIN-FOAM-SKIN POLYETHYLENE	ø 7,25 ± 0,18 mm
C	SHIELD	ALL + PET + ALL ADHESIVE TAPE	h. 27 mm
		- COVERAGE	100%
D	BRAID	TINNED COPPER	192 x 0,15 mm
		- COVERAGE	90%
E	SHEATH	NON-CONTAMINATING POLYVINYL-CHLORIDE	ø 10,30 ± 0,18 mm
	- COLOUR	BLACK - RAL 9004	
	- PRINTING	## METER ## HF 400 UF - PVC HIGH PERFORMANCE LOW LOSS FLEXIBLE CABLE 50 OHM	
		7x0,95 / 7,25 / 10,30 MADE IN ITALY CE 58 WEEK/YEAR EN 50575:2014 + A1:2016 Eca	

MINIMUM BENDING RADIUS (mm)

- SINGLE	ø EXTERNAL X 5
- SINGLE	ø EXTERNAL X 10

TEMPERATURE RANGE

-30 °C / +70 °C

CABLE WEIGHT (Kg/Km)

- COPPER	78,7
- PLASTIC	62,5
- TOTAL	144,5

ELECTRICAL PROPERTIES at 20°C

IMPEDANCE @ 200 MHz 50 ± 3 Ohm

CAPACITANCE 80 pF/m

VELOCITY RATIO 84%

RESISTANCE

- INNER CONDUCT.	4,0 Ohm/Km
- BRAID	5,0 Ohm/Km

TENSION

- SHEATH SPARK TESTING	6,0 kV
------------------------	--------

ATTENUATIONS dB/100 m.

		dB	W
5	MHz	1,1	7778
10	MHz	1,4	5500
30	MHz	2,2	3175
50	MHz	3,0	2460
150	MHz	5,0	1420
220	MHz	6,1	1173

MAX. POWER RATING W

		dB	W
450	MHz	9,0	820
600	MHz	10,7	710
800	MHz	12,4	615
900	MHz	13,2	580
1000	MHz	14,1	550
1500	MHz	17,4	449

		dB	W
1800	MHz	19,3	410
2000	MHz	20,5	389
2500	MHz	23,3	348
3000	MHz	25,8	318
5200	MHz	35,5	241
5800	MHz	37,7	228

STRUCTURAL RETURN LOSS dB

30 ÷ 450	MHz	>25	2000 ÷ 3000	MHz	>20
450 ÷ 1000	MHz	>24	3000 ÷ 4000	MHz	>19
1000 ÷ 2000	MHz	>21	4000 ÷ 5800	MHz	>18

SCREENING EFFECTIVENESS dB

100 ÷ 900	MHz	>95
900 ÷ 2000	MHz	>85
2000 ÷ 3000	MHz	>75

The producer reserves himself to make modification on the item without any notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Coaxial Cables](#) category:

Click to view products by [Siva Cavi](#) manufacturer:

Other Similar products are found below :

[89880-003-1000](#) [7810SB-010-1000](#) [9116-010-U500](#) [9272-006-500](#) [1807A-B59-U1000](#) [2020K8421-9X-CS3417](#) [275604-000](#) [935240-000](#)
[9659-010-1000](#) [980704-001](#) [33312-010-500](#) [CZ1589-000](#) [5022W0809-0CS3263](#) [10610-4-4](#) [EF8108-000](#) [1673B TIN100](#) [672525-001](#)
[735A1-008-1000](#) [8212-010-U500](#) [8263 010U500](#) [TCC-75-2](#) [9248 010U1000](#) [1694A 0081000](#) [8241F J5C1000](#) [7805R 008100](#) [9271 0061000](#)
[5339Q5 009U500](#) [89207 010100](#) [1369R 004500](#) [7915R 0101000](#) [833101-000](#) [1152A-A8R-500](#) [9907-E4X-U1000](#) [3092A-X7E-500](#) [100066-](#)
[0049](#) [5021K1011-0](#) [ECJ5048-L](#) [4505R 0071000](#) [T-RAD-400-FR](#) [2410329-4](#) [L01030B0021](#) [60.7500-23](#) [51305](#) [BU-4150031024](#) [0026010](#)
[L01001C0003](#) [BU-4150030024](#) [BU-4150032048](#) [SMBM-SMBM17410](#) [50942](#)