



## ■ Features

- Low collector-to-emitter saturation voltage.
- Large current capacity and wide ASO.
- Fast switching speed.
- Complementary to 2SB1124

SOT-89



Unit:mm



- 1.Base
- 2.Collector
- 3.Emitter

## ■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V <sub>CB0</sub>	60	V
Collector - Emitter Voltage	V <sub>CE0</sub>	50	
Emitter - Base Voltage	V <sub>EB0</sub>	6	
Collector Current - Continuous	I <sub>c</sub>	3	A
Collector Current - Pulse	I <sub>CP</sub>	6	
Collector Power Dissipation (Note.1)	P <sub>c</sub>	0.5	W
		1.5	
Junction Temperature	T <sub>J</sub>	150	°C
Storage Temperature Range	T <sub>stg</sub>	-55 to 150	

Note.1: Mounted on ceramic board (250mm<sup>2</sup> × 0.8mm)


## ■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V <sub>CB0</sub>	I <sub>c</sub> = 100 uA, I <sub>E</sub> = 0	60			V
Collector- emitter breakdown voltage	V <sub>CE0</sub>	I <sub>c</sub> = 1 mA, R <sub>BE</sub> = ∞	50			
Emitter - base breakdown voltage	V <sub>EB0</sub>	I <sub>E</sub> = 100 uA, I <sub>c</sub> = 0	6			
Collector-base cut-off current	I <sub>CBO</sub>	V <sub>CB</sub> = 50 V, I <sub>E</sub> = 0			1	uA
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> = 4V, I <sub>c</sub> =0			1	
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>c</sub> =2 A, I <sub>B</sub> =100 mA		0.19	0.5	V
Base - emitter saturation voltage	V <sub>BE(sat)</sub>	I <sub>c</sub> =2 A, I <sub>B</sub> =100 mA			1.2	
DC current gain	h <sub>FE</sub>	V <sub>CE</sub> = 2V, I <sub>c</sub> = 100 mA	100		560	
		V <sub>CE</sub> = 2V, I <sub>c</sub> = 3 A	35			
Turn-ON Time	t <sub>on</sub>	See specified Test Circuit.		70		ns
Storage Time	t <sub>stg</sub>			650		
Fall Time	t <sub>f</sub>			35		
Collector output capacitance	C <sub>ob</sub>	V <sub>CB</sub> = 10V, I <sub>E</sub> = 0, f=1MHz		25		pF
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> = 10V, I <sub>c</sub> = 50mA		150		MHz

## ■ Classification of h<sub>FE</sub>(1)





Type	2SD1624-R	2SD1624-S	2SD1624-T	2SD1624-U
Range	100-200	140-280	200-400	280-560
Marking	DG R*	DG S*	DG T*	DG U*

## Switching Time Test Circuit






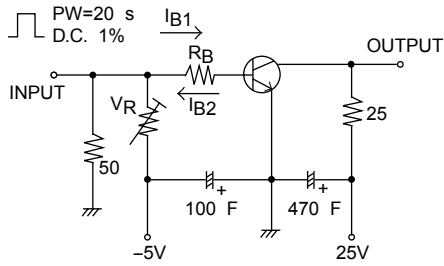


$10I_{B1} = -10I_{B2} = I_C = 1A$   
(For PNP, the polarity is reversed.)

## Typical Characteristics

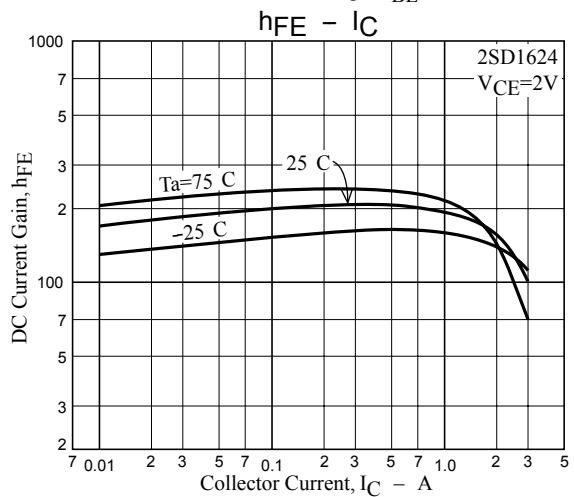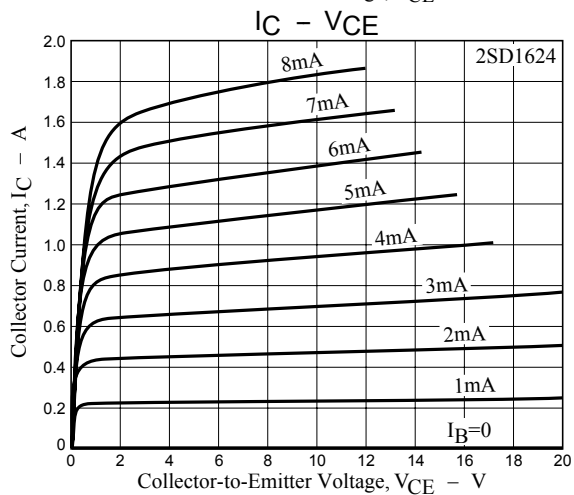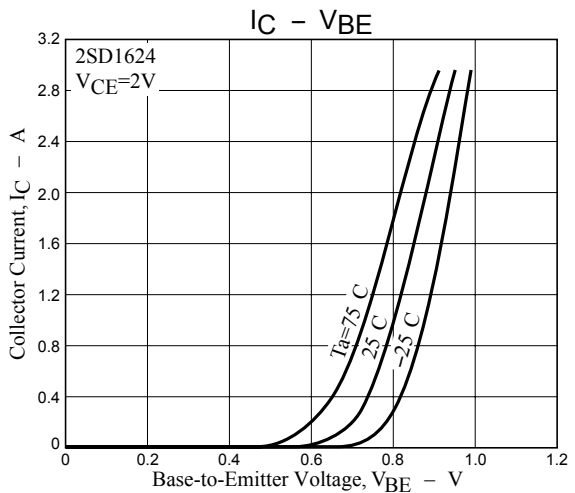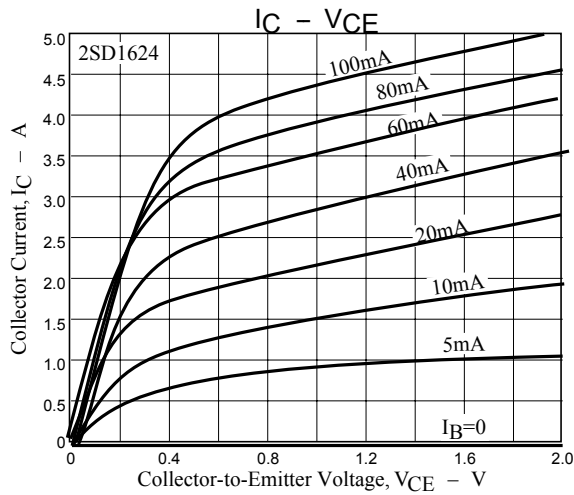

## Typical Characteristics

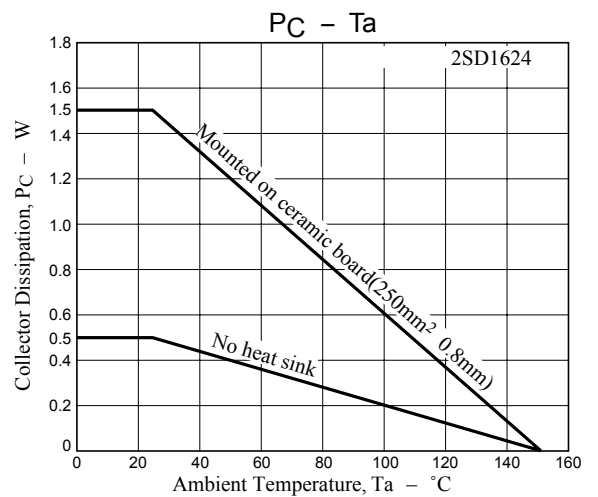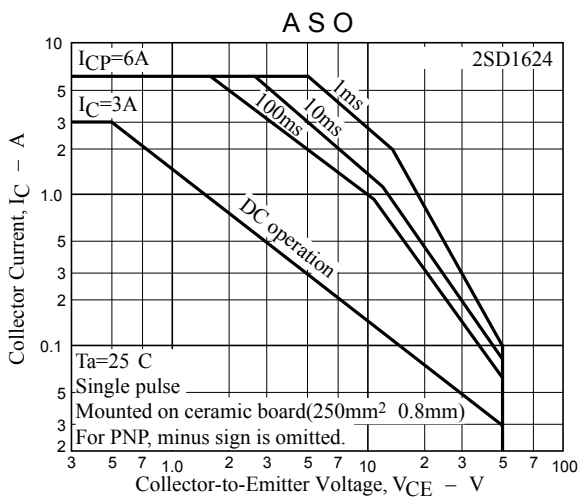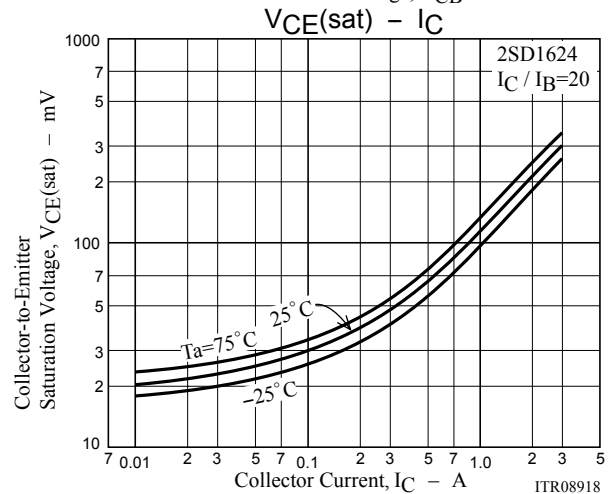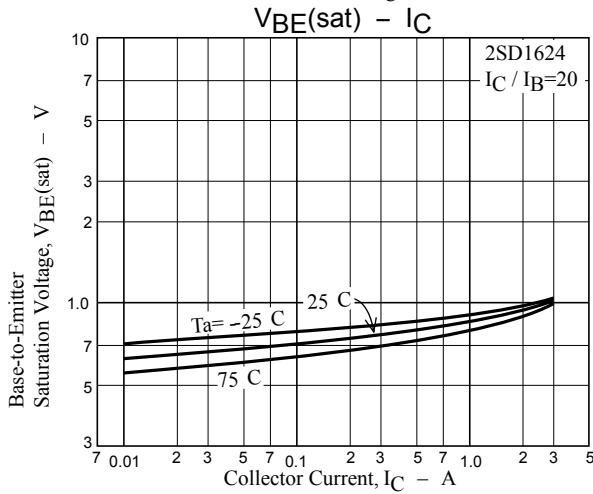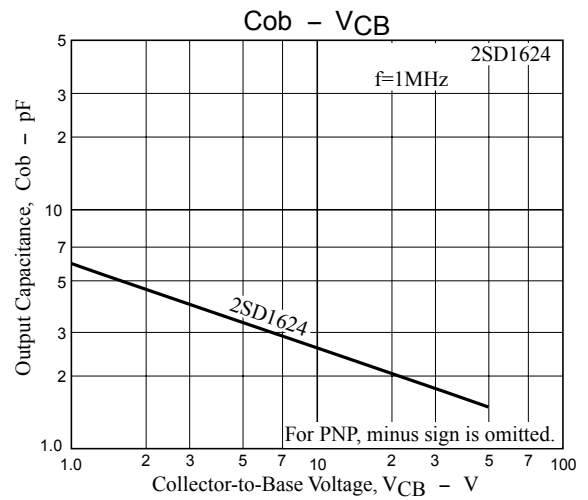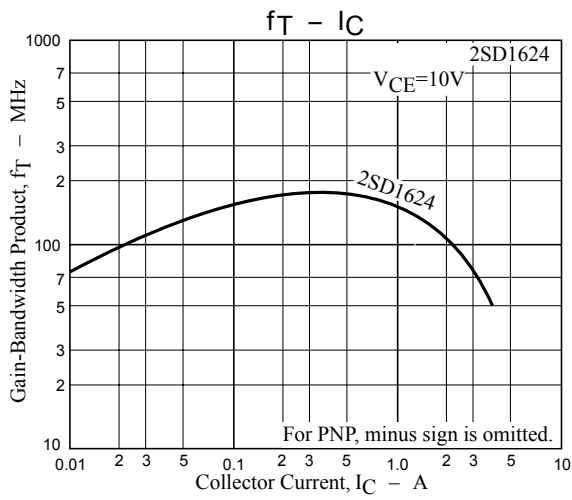

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [SLKORMICRO manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N4403](#) [2N6728](#)  
[2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-](#)  
[TL-E](#) [MCH4021-TL-E](#) [Jantx2N5416](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#)  
[TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANTX2N3735](#) [JANSR2N2222AUB](#)  
[CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#)  
[MMDT3946FL3-7](#) [2N4240](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#)